

Compliance with Special Operating Conditions or Restrictions

The applicant in coordination with other users of the site is committed to reducing power or ceasing operation as necessary to protect persons having access to the site, tower or antenna from radiofrequency electromagnetic fields in excess of FCC guidelines.

- The applicant has installed an ERI SHPX Series, 8 section, full-wavelength spaced antenna (EPA Type 3), in conformance with the Construction Permit. Consequently, automatic program test authority applies and no further documentation to demonstrate compliance with the FCC radiofrequency field exposure guidelines is required at this time.
- A spurious emissions report is attached which demonstrates compliance with 47 C.F.R. Sections 73.317(b) through 73.317(d). The spurious measurements were made with all stations simultaneously in operation.

Report Of Intermodulation Product Findings

**Pensacola, FL.
ERI Antenna: SHPX-8AC-SP
ERI: 783-3 Branch Combiner**

WMEZ	94.1 MHz.
WJTQ	100.7 MHz.
WXBM-FM	102.7 MHz.

August 19, 2019

**Electronics Research Inc.
7777 Gardner Road
Chandler, Indiana 47610
Phone (812) 925-6000 Fax (812) 925- 4030**

TABLE OF CONTENTS

Pensacola, FL.

Report of Findings for Intermodulation Product Measurements

Page 3~4.....Introduction
Page 5.....Carrier Reference Levels
Page 5.....Table of Third Order Products Expected
Page 6Intermodulation Product Measurements
Page 7Conclusion
Page 8Affidavit

Exhibits Accompanying This Report

EXHIBIT A.....Antenna and Combiner Specification Sheet and Drawing
A-1.....Drawing Depicting Antenna
A-2.....ERI Antenna Specification Sheet
A-3.....Drawing Depicting Combiner Module
A-4.....ERI Combiner Specification Sheet
A-5.....Theoretical Vertical Plane Relative Field Antenna Plots

EXHIBIT B-1.....Intermodulation Product Measurement Equipment Layout
B-2.....Broadcasting Scheme of the Multiplexed System

REPORT OF FINDINGS WMEZ~WJTQ~WXBM-FM 94.1 MHz. ~ 100.7 MHz. ~ 102.7 MHz.

Introduction: This report of findings is based on data collected at the WMEZ, WJTQ, and WXBM-FM broadcast facility located in Cantonment, Florida. The report includes measurements offered as proof that the combined operations of WMEZ (94.1 MHz.), WJTQ (100.7 MHz.), and WXBM-FM (102.7 MHz.), transmitters are in compliance with the FCC Rules and Regulations as required by the Code of Federal Regulations (CFR) Title 47 section 73.317 paragraph (b) through (d). In brief, the collection of measurements presented in this report shows that all possible third order inter-modulation (IM) products generated by this multiplex system are less than the maximum allowable level as required by section 73.317 (b) through (d). Jeff Taylor of Electronics Research, Inc. located in Chandler, Indiana performed the measurements summarized herein on August 21, 2019.

The following exhibits are provided:

Exhibit A:

- A-1 Drawing Depicting Antenna.
- A-2 SHPX-8AC-SP Antenna Specification Sheet.
- A-3 Drawing Depicting Multiplexing Scheme.
- A-4 ERI Branch Combiner Specification Sheet.
- A-5 Theoretical Vertical Plane Relative Field Antenna Plots

Exhibit B:

- B-1 Equipment Employed in Intermodulation Product Measurement.
 - B-2 Broadcasting Scheme of the Multiplexed Systems.
- Table 1. Carrier Reference Levels.
Table 2. Calculated Third Order Products.
Table 3. Intermodulation Analysis Measurements.

Exhibits Accompanying Report: Exhibit A provides comprehensive information on both antenna and filters used by these radio stations. Exhibit B illustrates the broadcasting scheme of each station, the layout of the equipment used to isolate and measure potential intermodulation products and forward carrier reference levels. Found within Table 1 are the narrow band carrier frequency measurements that provide relative output signal levels for the IM analysis. Table 2 lists the calculated third order products that can be generated from FM transmitters broadcasting from the multiplexed system. The IM Analysis Measurements, in Table 3, provides detailed information obtained from the product frequency investigation.

The Nature of Intermodulation Products (IM): Intermodulation products result from inadequate transmitter-to-transmitter isolation. Intermodulation products are commonly generated from radio stations operating into multiplexed facilities and congested antenna broadcast sites. The mechanics associated with the phenomenon have been well documented. When two or more transmitters are coupled to each other, new spectral components are produced by the mixing of the station frequencies in the active circuits of each transmitter. The common term used to describe this phenomenon is third order product denoted by the mathematical expression $[2(F_1)-(F_2)]$, where F_1 signifies the frequency of the transmitter that is generating the intermodulation product, and F_2 signifies the frequency causing the interference.

The Multiplexed System: These measurements were taken with all FM stations operating from the combined antenna system. The WMEZ, WJTQ, and WXBM-FM combined system is fundamentally comprised of antenna, feed line and branch combiner unit. The SHPX-8AC-SP (antenna) and (3) ERI 783-3 band-pass combiner units and feedline are products of Electronics Research, Inc.

To accomplish the aggregation of three transmitter signals into a common antenna feed and provide transmitter-to-transmitter isolation, a multiplexing scheme consisting of a 783-3 Branch Combiner was installed. Specifically, the Multiplexer utilizes three ERI Model 783-3 band pass modules with an interconnecting branch at each module. The multiplexer, fully assembled, exhibited transmitter port-to-port isolation in excess of -44 dB. Other performance measurements, such as match, loss, group-delay, etc, revealed that the multiplexer unit was in proper working condition. Refer to Exhibit A-4 for the Combiner Specification Sheet.

The IM Investigation: Directional Couplers were placed at key locations throughout the combiner to monitor and maintain the multiplexer's performance. All couplers furnished with the system are factory calibrated and capable of delivering accurate and repeatable RF measurements. To facilitate the taking of the measurements, the coupler located at the antenna output of the multiplexed system was used. Care was taken in the selection of the measurement location to ensure that the measurements would be made far removed from transmitters and any filtering used to reduce broadcast emissions. The coupler selected would normally be used for antenna reflection measurements and thus would provide greater than -43 dB directivity and a forward signal sample of -46 dB.

The forward port of the coupler was used for sampling the outgoing carrier levels and IM products. The IM sampled signal was fed by shielded cable into a Band Pass Filter where all extraneous energy was steeply attenuated. Various attenuation pads were used, when needed, on the band pass filter and/or the Spectrum Analyzer to ensure an adequate signal level for measurements without overloading the measurement equipment. A Rohde & Schwarz ZVL Vector Network Analyzer with Spectrum Analyzer serial# 100396 was employed to record the level of all signals investigated. The Rohde & Schwarz was also used for selective tuning of the Band Pass Filter. The Spectrum Analyzer portion of the Rohde & Schwarz was used to measure the close in spectral attenuation of each carrier and wide band search for any anomalies that may need further investigation. See attached Exhibit B-1 for an illustration of the measurement equipment.

Prior to recording measurements, all pertinent broadcasting equipment including Transmitters, Multiplexer, Feed Line and Antenna were adjusted to optimal performance. Also, it was confirmed before taking any measurements that all stations of concern were operating at their full licensed power level. From the equipment setup described above, the relative output signal level of each stations forward carrier was made. The resulting signal levels of these measurements are listed in Table 1, column labeled "Adjusted Level". This level will be used as the reference level for possible IM products of each carrier and was necessary to confirm that no significant levels of spurious energy, referenced to each carrier, were present from any transmitter operating from the multiplexed system.

Table 1 – Carrier Reference Levels.

Carrier Frequency (MHz)	Pad One (dB)	Bandpass Filter Loss (dB)	Measured Level (dBm)	Adjusted Level (dBm)	Notes
WMEZ 94.1 MHz.	3	-	14.72	17.72	
WJTQ 94.9 MHz.	3	-	14.92	17.92	
WXBM-FM 96.1 MHz.	3	-	15.07	18.07	

Predictable third-order products due to system harmonics mixed with all on-site interfering frequencies that could be generated from the multiplexed system are calculated and listed in Table 2.

Table 2 - Third Order Products.

Interfering Frequencies	Carrier Frequencies		
	94.1	100.7	102.7
WMEZ 94.1 MHz.	----	107.3	111.3
WJTQ 100.7 MHz.	87.5	----	104.7
WXBM-FM 102.7 MHz.	85.5	98.7	----

Using the equipment previously described the IM product measurements were recorded and are listed in Table 3. The signal levels referenced to the carriers are calculated and listed in the column labeled "Level Referenced to Carrier". Refer to Exhibit B-2 for a layout of the measurement equipment.

Table 3- Intermodulation Measurements

IM Measurements Taken in Pensacola, Florida										
Product Frequency (MHz)	Transmitter Frequency (MHz)	Interfering Frequency (MHz)	Pad (dB)	Bandpass Filter Loss (dB)	Total Loss	Measured Level (dBm)	Adjusted Level (dBm)	Carrier Reference Level (dBm)	Level Referenced to Carrier (dB)	Notes*
Transmitter Mixes										
	94.1	Ref.	3		3	14.72	17.72	17.72		
	100.7	Ref.	3		3	14.94	17.94	17.94		
	102.7	Ref.	3		3	15.07	18.07	18.07		
85.5	94.1	102.7	3	13.2	16.2	-114.07	-97.87	17.72	-115.59	
87.5	94.1	100.7	3	13.8	16.8	-116.07	-99.27	17.72	-116.99	
98.7	100.7	102.7	3	10.6	13.6	-86.63	-73.03	17.94	-90.97	98.7 LC
104.7	102.7	100.7	3	12.7	15.7	-111.27	-95.57	18.07	-113.64	
107.3	100.7	94.1	3	10.1	13.1	-94.96	-81.86	17.94	-99.8	107.3 LC
111.3	102.7	94.1	3	12.1	15.1	-114.95	-99.85	18.07	-117.92	

98.7 MHz. Local Carrier WYCT
 107.3 MHz. Local Carrier WRGB

The Spectrum Analyzer was used to check the close in spectral attenuation of the carrier to confirm the operation of the transmitter is in compliance with Sections (b) and (c) of the FCC Rules and Regulations.

As a final proof of the systems IM Product performance, a wide band search was undertaken using the Spectrum Analyzer. The purpose for this measurement was to look for suspicious anomalies that may warrant further investigation. My search ranged the complete frequency span of the receiver and resulted in no additional investigations.

Conclusion: Based upon my observations and measurements taken on August 21, 2019 as summarized in this document, I, Jeff Taylor, find the subject system-specifically the transmitter and filter system for the operation of WMEZ, WJTQ, and WXBM-FM into the antenna to be in proper working order. Furthermore, based on the measured data, it is my opinion that there are no inter-modulation products in excess of 80 dB below carrier levels. Based on this recorded data, I conclude that WMEZ, WJTQ, and WXBM-FM are in compliance with the requirements of Section 73.317 paragraph (b) through (d) of the FCC Rules and Regulations.

Respectfully submitted,
Electronics Research, Inc.

Jeff Taylor, Field Technician


State of Indiana)
) SS:
County of Warrick)

AFFIDAVIT

I, Jeff Taylor, hereby declare that the following statements are true and correct to the best of my knowledge and belief:



- 1.) I am a Field Technician for Electronics Research, Inc ("ERI") and have been employed by ERI for 22 years. I am familiar with and have assisted in the design, manufacturing and installation of FM Antennas and FM Multiplexers in my long tenure with ERI.
- 2.) I have either prepared and/or directly supervised the preparation of all technical information contained in this Report of Findings and to my knowledge to be accurate and true.
- 3.) ERI has been requested by Cumulus Media on behalf of radio Stations WMEZ, WJTQ, and WXBM-FM in Pensacola, FL. to prepare this Report of Findings.

Jeff Taylor; Field Technician

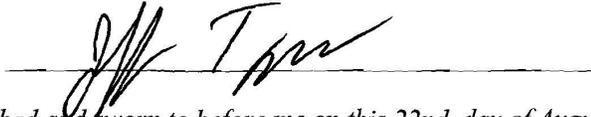

Subscribed and sworn to before me on this 22nd, day of August, 2019.

Tabitha Heilman; Notary Public
My commission expires January 2, 2022

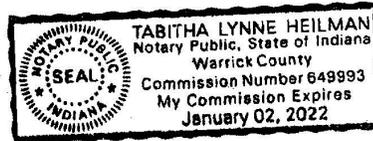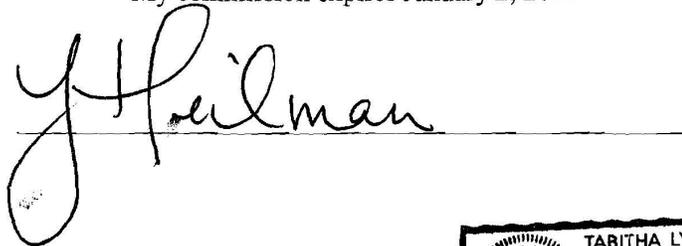

A-2 ERI Antenna Specification Sheet

Pensacola, Florida

General Specifications

Antenna Type High Power FM-Broadcast, Suitable for Multiplexing
 Model Number SHPX-8AC-SP
 Number of Bay Levels Eight
 Polarization..... Right Hand Circular

Electrical Specifications

Antenna Input Power Capability 30 KW Max ⁽¹⁾
 Operating Frequency Band..... 94.1 ~ 102.7 Megahertz.
 VSWR..... <1.15:1 @ Operating Frequencies ⁽²⁾
 Azimuthal Pattern Circularity Better Then +/- 1.5dB From RMS (Free Space)
 Power Split 50/50 (Horizontal & Vertical)
 Frequency Specific Information:

<u>Frequency</u>	<u>Station ERP</u>	<u>Beam Tilt</u>	<u>First Null Fill</u>	<u>Second Null Fill</u>	<u>Power Gain</u>	<u>Line Loss</u> ⁽³⁾	<u>Filter Loss</u> ⁽⁴⁾	<u>Computed TPO</u>
94.1	34.6 kW	0°	22 %	1%	4.035	.457 dB	.199 dB	10 kW
100.7	36.8 kW	0°	11 %	0%	4.287	.471 dB	.181 dB	10 kW
102.7	33.5 kW	0°	22 %	1 %	3.885	.476 dB	.157 dB	10 kW

Mechanical Specifications

Antenna Feed System..... Fed with One Lines
 Input Connector 3 1/8"-50 Ohm EIA Flanged
 Element Deicing..... None
 Interbay Spacing..... 119.5" Center to Center
 Array Length 72.2 Feet
 Construction Material (Antenna)..... All Noncorrosive
 Construction Material (Mounting) All Stainless Steel

1) Power Capability Has Been Rated Assuming an Operating Transmission VSWR of 1.5:1
 2) VSWR Specification Achieved After on Site Tuning for User Specific Frequencies.
 3) Line Loss Assumes A Feed Run of 491 Feet, 3 1/8" ERI Maxline.
 4) Losses Taken from Actual Combiner.

NOTES:
 1. REMOVE ALL BURRS & SHARP EDGES.
 2. ASSEMBLE FILTER BY MATING CORRESPONDING LETTERS AND NUMBERS.

ITEM	QTY	PART NUMBER	DESCRIPTION
19	36	WLO6SS	3/8 in, SS LOCK WASHER
18	36	SC0616H0100	3/8-16 UNC x 1 in, SST HEX BOLT
17	6	NU0518BZ	5/16 - 18 BRONZE HEX NUT
16	6	SC0518T0H50	5/16-18 X 4.50" T-BOLT
15	7	PLA300-21	3-1/8" HARDWARE KIT
14	6	FI0284	INPUT ADAPTER
13	6	FI0001	6" MARMAN FLANGE CONTACT RING
12	6	CM0036	6" MARMAN CLAMP
11	6	CF0099	6" MARMAN TO 3-1/8" ADAPTER
10	1	DC3005-AL	3-1/8" DIRECTIONAL COUPLER (DUAL)
9	5	DC3003-AL	3-1/8" DIRECTIONAL COUPLER
8	7	CCA3101A-3	3-1/8" INNER CONNECTOR ASSEMBLY
7	5	1329350-10SE	90 DEG FLANGED ELBOW ASSEMBLY
6	2	1329350-5-15.622	3-1/8" EIA ALUM. LINE SECT., 15.622" LONG
5	1	1329350-5-14.211	3-1/8" EIA ALUM. LINE SECT., 14.211" LONG
4	1	1329350-5-6.485	3-1/8" EIA ALUM. LINE SECT., 6.485" LONG
3	1	CT37322-5	3-1/8" FLANGED TEE, ALUMINUM
2	1	CT37322-1	3-1/8" FLANGED TEE, ALUMINUM
1	3	783-3-00-66	783-3 FM BAND PASS FILTER, FLOOR MTD., CONVECTION COOLED

BILL OF MATERIAL
 PROJECT NO: 37322/3
 DATE: 6/26/2019
 DRAWN BY: HBI
 CHECKED BY: JRE
 ENG: JRE
 DATE: 6/26/2019
 TITLE: 783-4 COMBINER INSTALLATION LAYOUT
 PENSACOLA/MILTON, FL
 WMEZ/WJTQ/WXBM - 94.1, 100.7 & 102.7 MHz
 SCALE: NOTED
 SHEET: 1 OF 2

AMC CERTIFIED FABRICATOR
 ELECTRONICS RESEARCH INC.
 7777 GARDNER BLVD
 GAITHERSBURG, MD 20878
 PHONE: (301) 955-6000
 FAX: (301) 955-6599

A-4 ERI Combiner Specification Sheet

Pensacola, Florida

General Specifications:

Multiplexer Type Branch Combiner
 Number of Combining Units Three
 Injected Port to Injected Port Isolation..... > - 44 dB
 Output Connector..... 3 1/8 "50 Ohm EIA (Flanged)
 Output Power (Designed) 30 kW ⁽¹⁾

Heat Removal.....Natural Convection
 Physical ArrangementAll Components Floor standing

Injected Port Specifications:

Frequency Assignment 94.1, 100.7, and 102.7 MHz.
 Power Rating, Each Injected Port 10 kW for 94.1 MHz.
 Power Rating, Each Injected Port 10 kW for 100.7 and 10 kW for 102.7 MHz.
 Input Connector 3-1/8" 50 Ohm EIA (Flanged)
 VSWR..... < 1.07:1 @ +/-200 KHz. ⁽²⁾
 Group Delay Less than 75 ns Overall Variation, Carrier @ +/- 150 KHz.
 Insertion Loss (Measured):

94.1 MHz. - 0.199 dB
 100.7 MHz. - 0.181 dB
 102.7 MHz. - 0.157 dB

1) Power Rating Listed is as Designed Only. Actual Power Capabilities May Vary.

2) When Terminated in 50 Ohm Resistive Load.

ELECTRONICS RESEARCH, INC.
7777 GARDNER ROAD
CHANDLER, IN. 47610

FIGURE 1


----THEORETICAL----
VERTICAL PLANE RELATIVE FIELD

8 ERI TYPE SHPX ROTOTILLER(TM) CENTER FED ELEMENTS
+0.00 DEGREE(S) ELECTRICAL BEAM TILT
22 PERCENT FIRST NULL FILL
1 PERCENT SECOND NULL FILL
POWER GAIN IS 4.035 IN THE HORIZONTAL PLANE(4.035 IN THE MAX.)

JULY 13, 2018

94.1 MHz.

ELEMENT SPACING:
119.5 INCHES

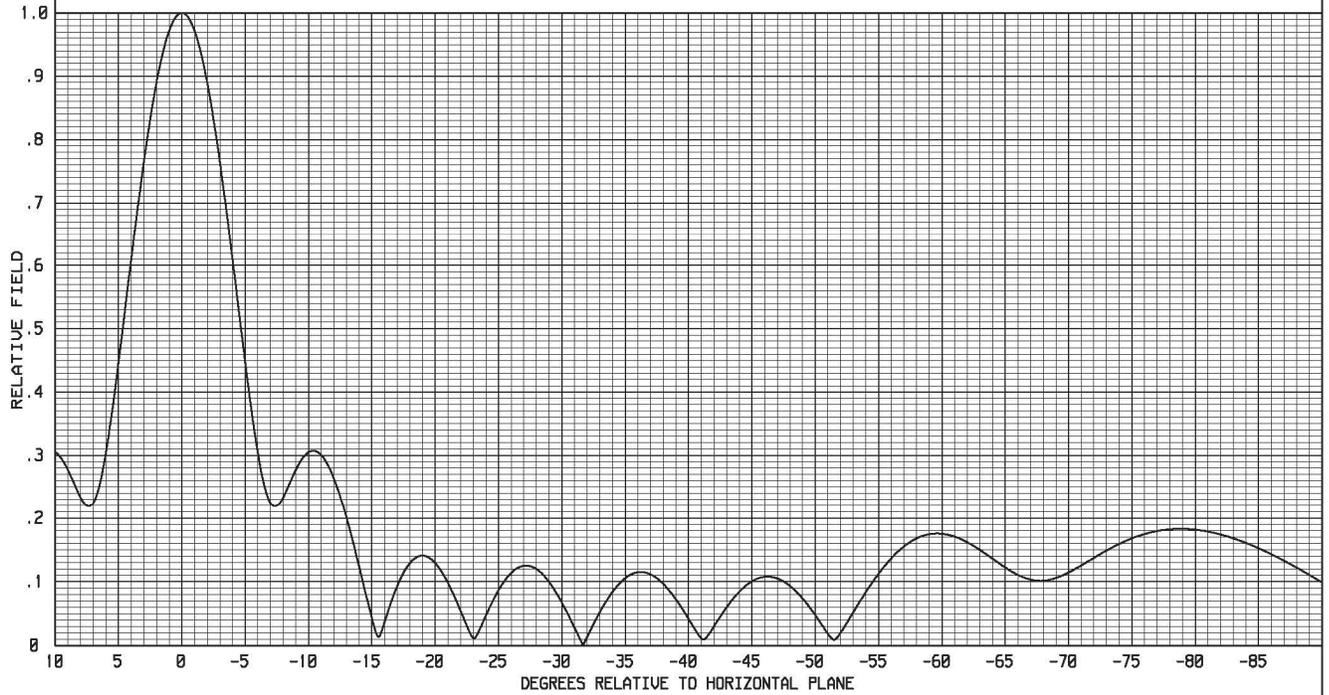

ELECTRONICS RESEARCH, INC.
7777 GARDNER ROAD
CHANDLER, IN. 47610

FIGURE 2


----THEORETICAL----
VERTICAL PLANE RELATIVE FIELD

8 ERI TYPE SHPX ROTOTILLER(TM) CENTER FED ELEMENTS
+0.00 DEGREE(S) ELECTRICAL BEAM TILT
11 PERCENT FIRST NULL FILL
0 PERCENT SECOND NULL FILL
POWER GAIN IS 4.278 IN THE HORIZONTAL PLANE(4.278 IN THE MAX.)

JULY 13, 2018

100.7 MHz.

ELEMENT SPACING:
119.5 INCHES

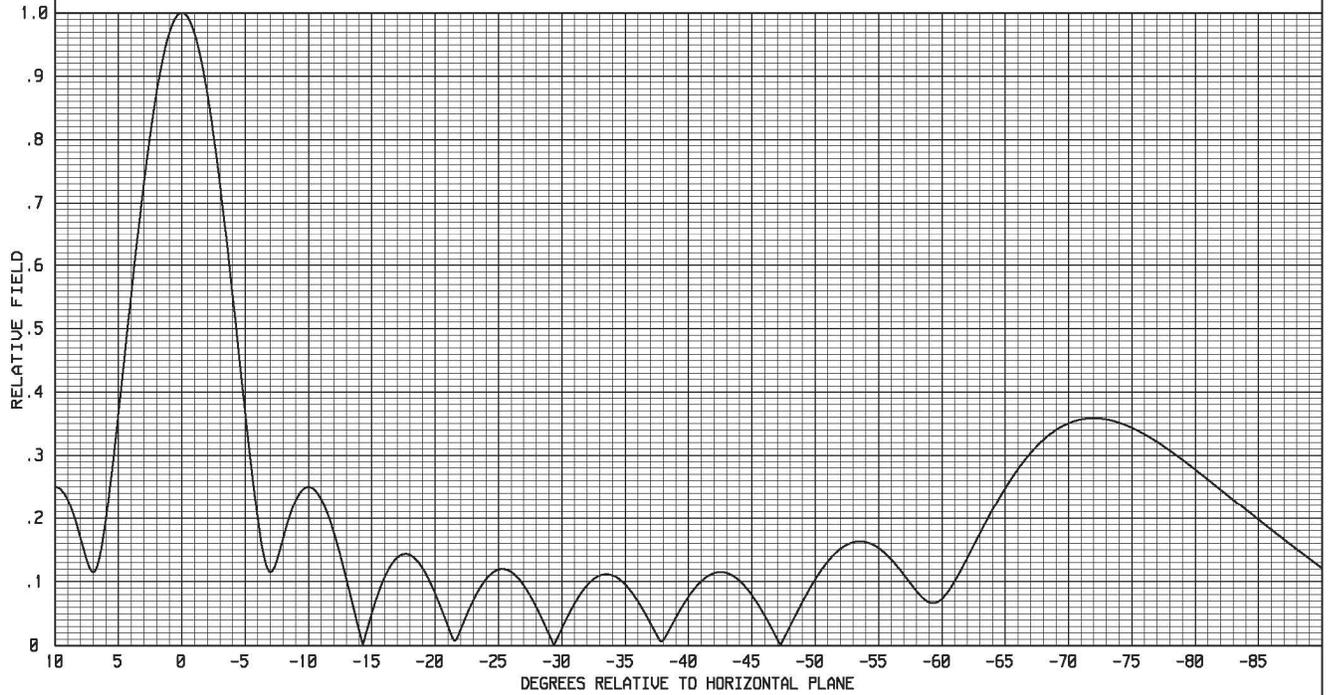

ELECTRONICS RESEARCH, INC.
7777 GARDNER ROAD
CHANDLER, IN. 47618

FIGURE 3


----THEORETICAL----
VERTICAL PLANE RELATIVE FIELD



JULY 13, 2018

102.7 MHz.

8 ERI TYPE SHPX ROTOTILLER(TM) CENTER FED ELEMENTS
+0.00 DEGREE(S) ELECTRICAL BEAM TILT
22 PERCENT FIRST NULL FILL
1 PERCENT SECOND NULL FILL
POWER GAIN IS 3.885 IN THE HORIZONTAL PLANE(3.885 IN THE MAX.)

ELEMENT SPACING:
119.5 INCHES

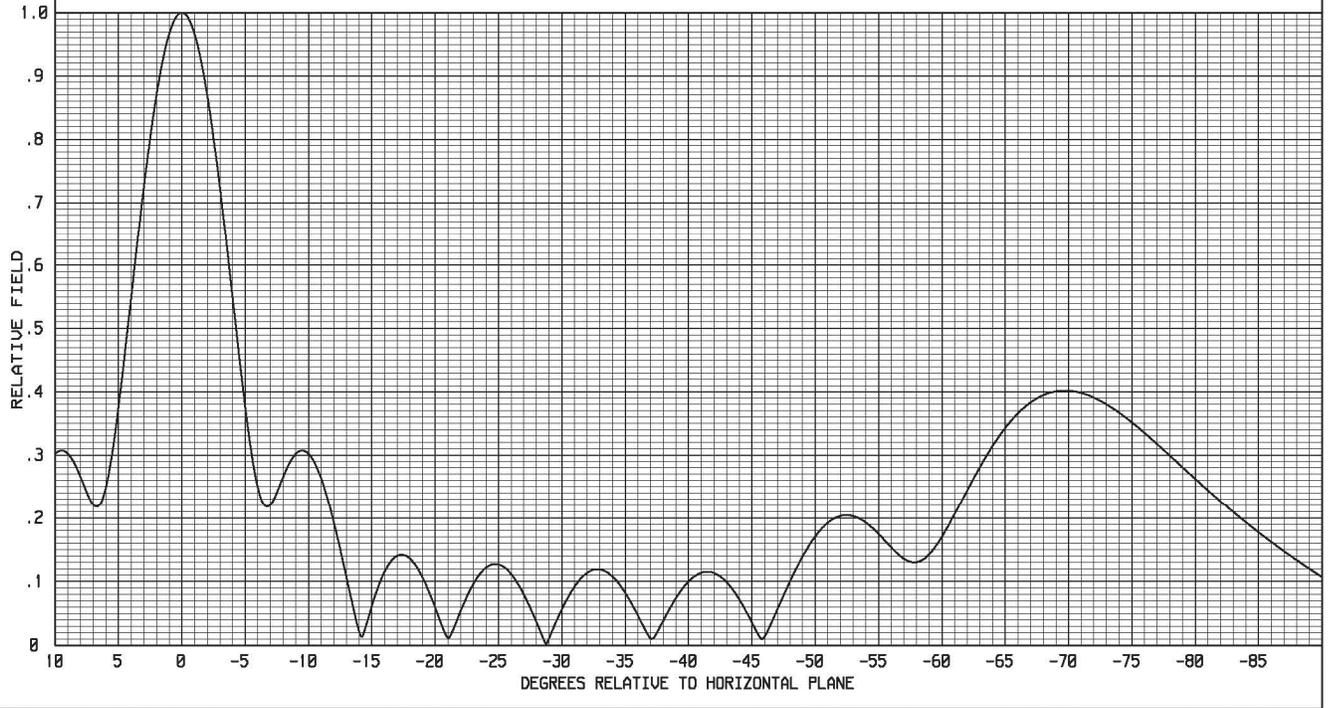

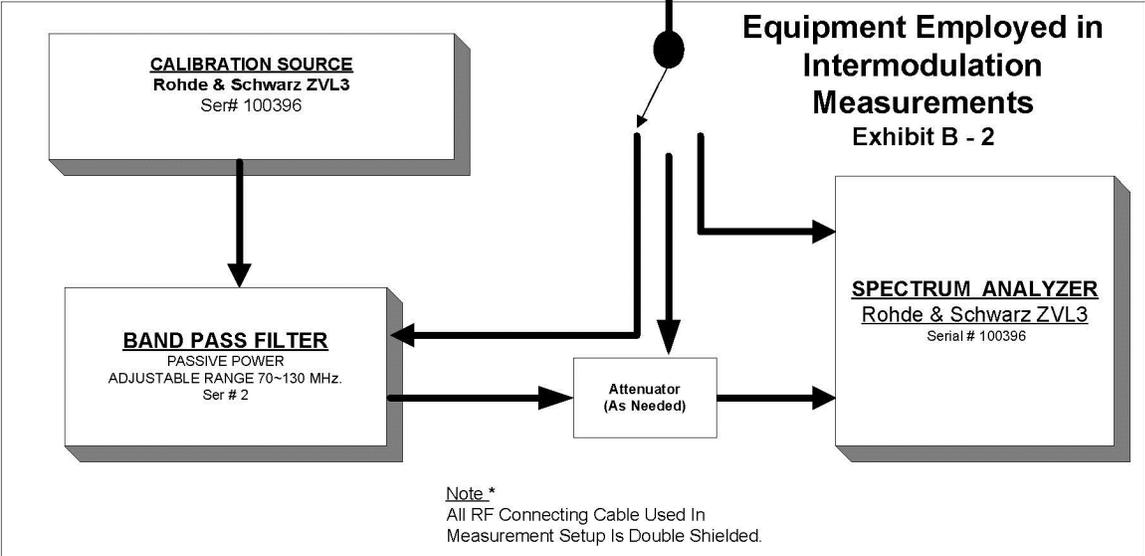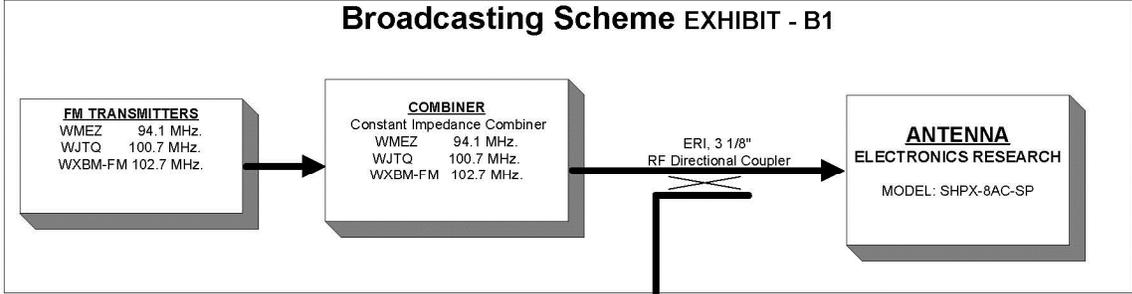

Broadcasting Scheme and Equipment Employed in Intermodulation Measurements

EXHIBIT B