


NEW!

12-17-2021

RMS(V) = .816

Graph is Relative Field

Azi	Field	dBk	kW
000	1.000	-09.208	0.120
010	1.000	-09.208	0.120
020	1.000	-09.208	0.120
030	1.000	-09.208	0.120
040	1.000	-09.208	0.120
050	1.000	-09.208	0.120
060	1.000	-09.208	0.120
070	0.899	-10.133	0.097
080	0.714	-12.134	0.061
090	0.567	-14.137	0.039
100	0.451	-16.125	0.024
110	0.358	-18.131	0.015
120	0.284	-20.142	0.010
130	0.237	-21.713	0.007
140	0.290	-19.960	0.010
150	0.352	-18.277	0.015
160	0.301	-19.637	0.011
170	0.268	-20.645	0.009
180	0.313	-19.297	0.012
190	0.394	-17.298	0.019
200	0.496	-15.299	0.030
210	0.625	-13.291	0.047
220	0.787	-11.289	0.074
230	0.991	-09.287	0.118
240	1.000	-09.208	0.120
250	1.000	-09.208	0.120
260	1.000	-09.208	0.120
270	1.000	-09.208	0.120
280	1.000	-09.208	0.120
290	1.000	-09.208	0.120
300	1.000	-09.208	0.120
310	1.000	-09.208	0.120
320	1.000	-09.208	0.120
330	1.000	-09.208	0.120
340	1.000	-09.208	0.120
350	1.000	-09.208	0.120

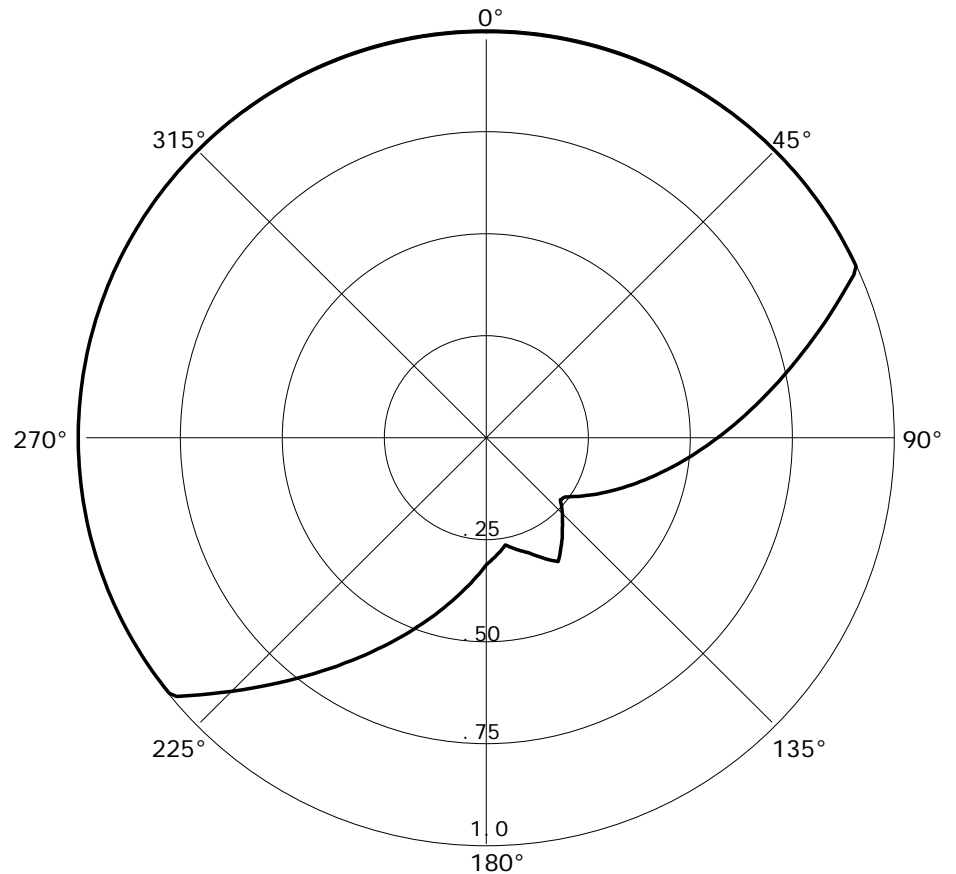

Pattern shall be achieved by conventional means and performed by an authorized antenna manufacturer. No change of field azimuth exceeds 2 dB.