


Jampro "Double V" (EPA)-Type 2, 2 Bays, Spac= 0.5, H=1.23 kW, V=1.23 kW, 14.5 M AG
200

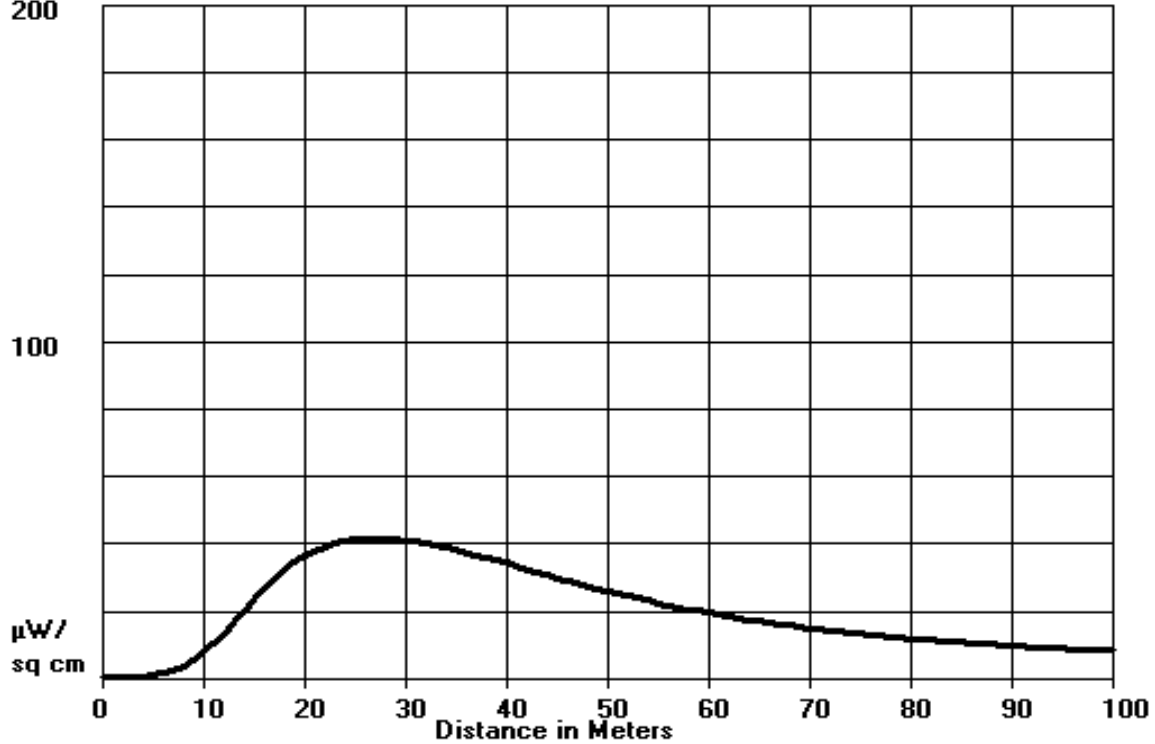

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)
Dist(Meters) PD (H) PD (V) Total (uW/cm2) Percent Max. (1000)

0	0.00	0.00	0.00	0.0
1	0.00	0.00	0.00	0.0
2	0.00	0.01	0.01	0.0
3	0.01	0.04	0.04	0.0
4	0.04	0.12	0.16	0.0
5	0.13	0.31	0.44	0.0
6	0.36	0.63	0.98	0.1
7	0.81	1.10	1.91	0.2
8	1.48	1.76	3.23	0.3
9	2.48	2.56	5.04	0.5
10	3.88	3.46	7.34	0.7
11	5.41	4.44	9.85	1.0
12	7.10	5.45	12.56	1.3
13	9.33	6.52	15.85	1.6
14	11.81	7.58	19.39	1.9
15	14.34	8.50	22.85	2.3
16	16.82	9.25	26.07	2.6
17	19.24	9.90	29.13	2.9
18	21.11	10.60	31.70	3.2
19	22.64	11.25	33.89	3.4
20	23.97	11.81	35.77	3.6
21	25.06	12.28	37.34	3.7
22	25.88	12.69	38.58	3.9
23	26.53	13.01	39.54	4.0
24	27.01	13.25	40.26	4.0
25	27.33	13.42	40.76	4.1

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
26	27.34	13.67	41.01	4.1
27	27.23	13.86	41.09	4.1
28	27.02	13.99	41.02	4.1
29	26.75	14.07	40.82	4.1
30	26.41	14.09	40.51	4.1
31	26.02	14.08	40.10	4.0
32	25.46	14.08	39.54	4.0
33	24.87	14.05	38.92	3.9
34	24.27	13.98	38.25	3.8
35	23.66	13.89	37.55	3.8
36	23.05	13.77	36.82	3.7
37	22.44	13.64	36.08	3.6
38	21.84	13.48	35.32	3.5
39	21.25	13.31	34.56	3.5
40	20.66	13.11	33.76	3.4
41	20.04	12.76	32.80	3.3
42	19.45	12.42	31.87	3.2
43	18.87	12.09	30.95	3.1
44	18.30	11.76	30.07	3.0
45	17.76	11.45	29.21	2.9
46	17.23	11.14	28.37	2.8
47	16.73	10.84	27.56	2.8
48	16.23	10.55	26.78	2.7
49	15.76	10.26	26.02	2.6
50	15.30	9.99	25.29	2.5
51	14.86	9.72	24.59	2.5
52	14.44	9.47	23.90	2.4
53	14.03	9.22	23.24	2.3
54	13.63	8.97	22.61	2.3
55	13.19	8.74	21.94	2.2
56	12.77	8.52	21.29	2.1
57	12.36	8.31	20.67	2.1
58	11.97	8.10	20.07	2.0
59	11.60	7.90	19.50	2.0
60	11.24	7.70	18.95	1.9
61	10.90	7.52	18.42	1.8
62	10.57	7.33	17.91	1.8
63	10.26	7.16	17.42	1.7
64	9.96	6.99	16.95	1.7
65	9.67	6.82	16.49	1.6
66	9.39	6.66	16.05	1.6
67	9.13	6.50	15.63	1.6
68	8.87	6.35	15.22	1.5
69	8.63	6.21	14.83	1.5
70	8.39	6.07	14.46	1.4
71	8.16	5.93	14.09	1.4
72	7.95	5.80	13.74	1.4
73	7.73	5.67	13.40	1.3
74	7.53	5.54	13.07	1.3
75	7.34	5.42	12.76	1.3
76	7.15	5.30	12.45	1.2
77	6.97	5.19	12.16	1.2

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
78	6.79	5.08	11.87	1.2
79	6.63	4.97	11.60	1.2
80	6.46	4.87	11.33	1.1
81	6.31	4.77	11.07	1.1
82	6.16	4.67	10.83	1.1
83	6.02	4.58	10.60	1.1
84	5.89	4.50	10.39	1.0
85	5.76	4.42	10.18	1.0
86	5.64	4.34	9.98	1.0
87	5.52	4.26	9.78	1.0
88	5.40	4.19	9.59	1.0
89	5.29	4.12	9.41	0.9
90	5.18	4.05	9.23	0.9
91	5.08	3.98	9.05	0.9
92	4.98	3.91	8.88	0.9
93	4.88	3.84	8.72	0.9
94	4.78	3.78	8.56	0.9
95	4.69	3.71	8.40	0.8
96	4.60	3.65	8.25	0.8
97	4.51	3.59	8.10	0.8
98	4.42	3.53	7.95	0.8
99	4.34	3.48	7.81	0.8
100	4.26	3.42	7.68	0.8