

OVERLAP REQUIREMENTS


(Page 1 of 3)

Clear Water Brands, Inc.

Chippewa Falls, WI

The attached map is an allocation study showing the interfering contours for the proposed W240DC facilities in relation to the protected contours for all FM broadcast, FM translator, and Low Power FM stations which require protection consideration. As can be seen from this figure, no overlap will occur between the protected contour for any of these stations and the respective interfering contour for the proposed W240DC facilities. Based upon this information, the proposed W240DC facilities will provide the required protection to all stations requiring consideration.

Also attached is an FM spacing study which demonstrates that the proposed facilities will comply with the intermediate frequency separation requirements outlined in Section 73.207 of the FCC Rules with regard to all existing or proposed stations operating on FM Channels 293 and 294.

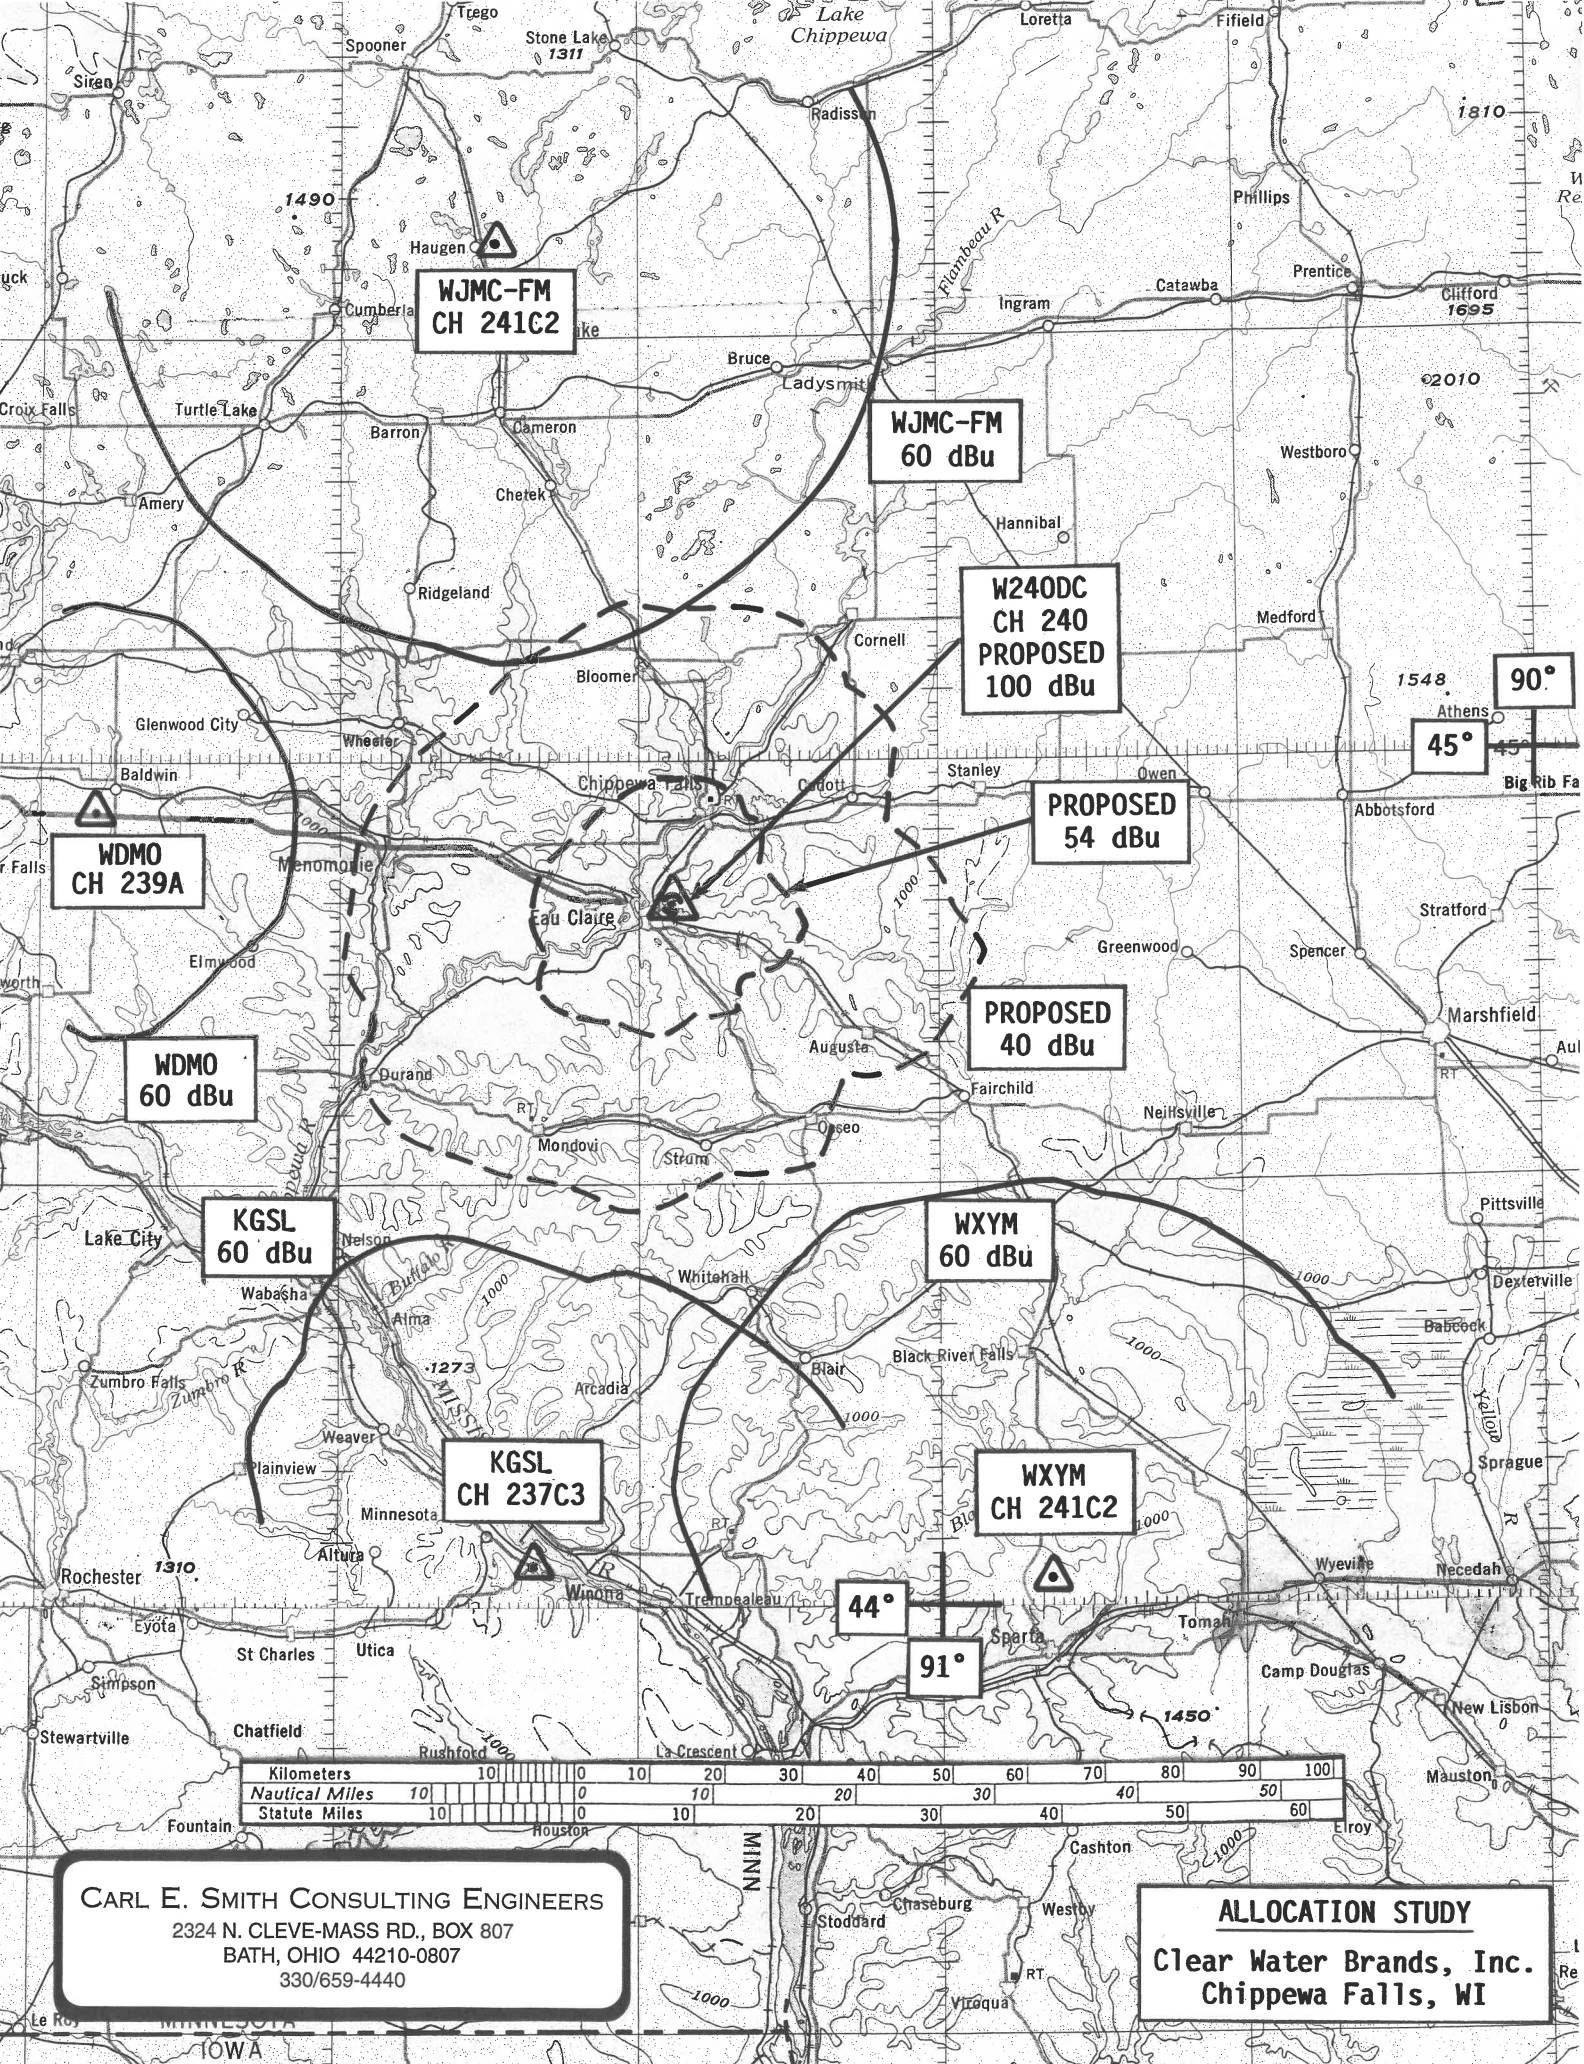

CARL E. SMITH CONSULTING ENGINEERS
2324 N. CLEVE-MASS RD., BOX 807
BATH, OHIO 44210-0807
330/659-4440

ALLOCATION STUDY
Clear Water Brands, Inc.
Chippewa Falls, WI

TABLE 1

FM ALLOCATION STUDY - CHANNEL 240A (95.9 MHz) - CHIPPEWA FALLS, WI

CLEAR WATER BRANDS, INC.
CHIPPEWA FALLS, WI

STUDY COORDINATES: 44/49/47 91/26/48

STATION -----	LOCATION -----	CHANNEL -----	CLASS -----	SPACING (km) -----	REQUIRED SPACING* (km) -----	NOTES -----
WYTE	MARSHFIELD, WI	293	C1	127.88	22.0	
WATQ	CHETEK, WI	294	C2	45.35	15.0	

* Required Spacing Per Section 73.207 of The FCC Rules

Notes:

- | | |
|--------------------------------------|----------------------------------|
| 1 - Applied For Under Section 73.215 | 7 - Pending Application |
| 2 - Construction Permit | 8 - Petition For Reconsideration |
| 3 - Channel Deletion Proposed | 9 - Proposed Rulemaking |
| 4 - Move From This Channel Ordered | 10 - Rulemaking Petition |
| 5 - Move to This Channel Ordered | 11 - Short-Spaced |
| 6 - One Step Reference Site | 12 - Vacant Allotment |