

BENJAMIN F. DAWSON III, PE
THOMAS M. ECKELS, PE
STEPHEN S. LOCKWOOD, PE
DAVID J. PINION, PE
ERIK C. SWANSON, PE

THOMAS S. GORTON, PE
MICHAEL H. MEHIGAN, PE

HATFIELD & DAWSON
CONSULTING ELECTRICAL ENGINEERS
9500 GREENWOOD AVE. N.
SEATTLE, WASHINGTON 98103

TELEPHONE (206) 783-9151
FACSIMILE (206) 789-9834
E-MAIL hatdaw@hatdaw.com

JAMES B. HATFIELD, PE
CONSULTANT

MAURY L. HATFIELD, PE
(1942-2009)

PAUL W. LEONARD, PE
(1925-2011)

Method of Moments Proof of Performance
and
Application for Direct Measurement of Power

KPUG (AM)
Bellingham, Washington
Facility ID 58887

1170 kHz
10 kW Day, 5 kW Night DA-N

Saga Broadcasting, LLC

October 2016

APPLICATION FOR LICENSE
RADIO STATION KPUG-AM Bellingham, Washington
1170 kHz 10 kW Day, 5 kW Night DA-N

Purpose of Application

- Item 1 Analysis of Tower Impedance Measurements to Verify Method of Moments Model
- Item 2 Method of Moments Model Details for Towers Driven Individually
- Item 3 Method of Moments Model Details for Directional Antenna Pattern
- Item 4 Derivation of Operating Parameters for Directional Antenna
- Item 5 Direct Measurement of Power

Appendix A FCC Form 302-AM

Purpose of Application

This engineering exhibit supports an application for return to Direct Measurement of Power for KPUG(AM), Bellingham, WA following the installation of an FM auxiliary antenna on the #1 (west) tower of the KPUG antenna array. The FM auxiliary facilities are authorized by construction permits BXP-20160329ABY (KISM-FM) and BXPH-20160329ACN (KAFE-FM). Per §1.30003 of the Commission's rules, base impedance measurements were taken on tower #1 of the KPUG antenna array. While not required by the rule, measurements were also taken on the other towers, due to recent repairs to the antenna ground system. The measurements taken on towers 2 and 3 differ only slightly from those taken for the previous method of moments proof of performance. This engineering exhibit contains an updated method of moment analysis of the KPUG array, based on the new impedance measurements.

Information is provided herein demonstrating that the directional antenna parameters for the patterns authorized by the station license have been determined in accordance with the requirements of section §73.151(c) of the FCC Rules. The system has been adjusted to produce antenna monitor parameters within +/- 5 percent in ratio and +/- 3 degrees in phase of the modeled values, as required by the Rules.

All measurements used in this report were made by the undersigned engineer.

Item 1

Analysis of Tower Impedance Measurements to Verify Method of Moments Model - KPUG

Tower base impedance measurements were made at the locations of the sample system current transformers (the "measurement points") using a Hewlett Packard 8751A network analyzer in a calibrated measurement system. The other towers were open circuited at their respective measurement points.

KPUG measured "measurement point" impedances

Tower	Measured R	Measured X
1 (W)	62.9	+j108.1
2 (C)	55.0	+j86.4
3 (E)	53.4	+j90.2

Circuit calculations were performed to relate the method of moments modeled impedances at the tower base feed points to those at the measurement locations as shown in the diagram titled *Analysis of Tower Impedance Measurements to Verify Method of Moments Model*. The series/parallel equivalent impedance of X_C , X_s and X_{LC} was used in the moment method model as a load at ground level (lumped load) for the open circuited towers. In all cases, the modeled impedance at the reference point is within one ohm of the measured reference point impedance.

Item 2

Method of Moments Model Details for Towers Driven Individually - KPUG

The array of towers was modeled using Expert MININEC Broadcast Professional Ver 14.0. The top and bottom wire end points were specified in degrees in the geographic coordinate system, using the theoretical directional antenna specifications for tower spacing and orientation. All towers are 92.1 electrical degrees in height, and are modeled using 21 segments per tower. Therefore, all segments are less than 10° in length, as required by the Commission's rules. All towers are uniform cross-section three-sided guyed towers with 24 inch faces. Tower #1 is now equipped with an 3 bay FM auxiliary antenna and iso-coil. The impedance value for the iso-coil used in the model is a measured value obtained from the manufacturer.

Each tower's modeled height relative to its physical height falls within the required range of 75 to 125 percent and each modeled radius falls within the required range of 80 percent to 150 percent of the radius of a circle having a circumference equal to the sum of the widths of the tower faces.

KPUG Tower Dimensions - Physical and Modeled

Tower	Physical Height (degrees)	Modeled Height (degrees)	Modeled Percentage of Height	Modeled Radius (meters)	Percentage of Equivalent Radius
1	92.1	101.7	110.4	.29	100
2	92.1	99.5	108.0	.29	100
3	92.1	98	106.4	.29	100

KPUG MININEC Model Node and Wire Numbering

Tower	Wires	Base Node
1	1-21	1
2	22-42	22
3	43-63	43

KPUG Tower 1 Driven Towers 2 & 3 Open Circuit at Current Transformer Location

GEOMETRY

Wire coordinates in degrees; other dimensions in meters
Environment: perfect ground

wire	caps	Distance	Angle	Z	radius	segs
1	none	0	0	0	.29	21
		0	0	101.7		
2	none	67.7	110.	0	.29	21
		67.7	110.	99.5		
3	none	135.4	110.	0	.29	21
		135.4	110.	98.		

Number of wires = 3
current nodes = 63

Individual wires segment length radius	minimum		maximum	
	wire	value	wire	value
	3	4.66667	1	4.84286
	1	.29	1	.29

ELECTRICAL DESCRIPTION

Frequencies (KHz)

no.	frequency		no. of steps	segment length (wavelengths)	
	lowest	step		minimum	maximum
1	1,170.	0	1	.012963	.0134524

Sources

source node	sector	magnitude	phase	type
1	1	1.	0	voltage

Lumped loads

load	node	resistance (ohms)	reactance (ohms)	inductance (mH)	capacitance (uF)	passive circuit
1	43	0	4,412.	0	0	0
2	22	0	7,600.	0	0	0

IMPEDANCE

normalization = 50.

freq (KHz)	resist (ohms)	react (ohms)	imped (ohms)	phase (deg)	VSWR	S11 dB	S12 dB
source = 1; node 1, sector 1 1,170.	64.71	84.302	106.27	52.5	4.0143	-4.4205	-1.9475

KPUG Tower 2 Driven Towers 1 & 3 Open Circuit at Current Transformer Location

GEOMETRY

Wire coordinates in degrees; other dimensions in meters

Environment: perfect ground

wire	caps	Distance	Angle	Z	radius	segs
1	none	0	0	0	.29	21
		0	0	101.7		
2	none	67.7	110.	0	.29	21
		67.7	110.	99.5		
3	none	135.4	110.	0	.29	21
		135.4	110.	98.		

Number of wires = 3
current nodes = 63

Individual wires segment length radius	minimum		maximum	
	wire	value	wire	value
	3	4.66667	1	4.84286
	1	.29	1	.29

ELECTRICAL DESCRIPTION

Frequencies (KHz)

no.	frequency		no. of steps	segment length (wavelengths)	
	lowest	step		minimum	maximum
1	1,170.	0	1	.012963	.0134524

Sources

source	node	sector	magnitude	phase	type
1	22	1	1.	0	voltage

Lumped loads

load	node	resistance (ohms)	reactance (ohms)	inductance (mH)	capacitance (uF)	passive circuit
1	43	0	4,412.	0	0	0
2	1	0	11,500.	0	0	0

IMPEDANCE

normalization = 50.

freq (KHz)	resist (ohms)	react (ohms)	imped (ohms)	phase (deg)	VSWR	S11 dB	S12 dB
source = 1; node 22, sector 1 1,170.	56.898	67.489	88.274	49.9	3.3162	-5.4065	-1.475

KPUG Tower 3 Driven Towers 1 & 2 Open Circuit at Current Transformer Location

GEOMETRY

Wire coordinates in degrees; other dimensions in meters

Environment: perfect ground

wire	caps	Distance	Angle	Z	radius	segs
1	none	0	0	0	.29	21
		0	0	101.7		
2	none	67.7	110.	0	.29	21
		67.7	110.	99.5		
3	none	135.4	110.	0	.29	21
		135.4	110.	98.		

Number of wires = 3
current nodes = 63

Individual wires	minimum		maximum	
	wire	value	wire	value
segment length	3	4.66667	1	4.84286
radius	1	.29	1	.29

ELECTRICAL DESCRIPTION

Frequencies (KHz)

no.	frequency		no. of steps	segment length (wavelengths)	
	lowest	step		minimum	maximum
1	1,170.	0	1	.012963	.0134524

Sources

source	node	sector	magnitude	phase	type
1	43	1	1.	0	voltage


Lumped loads

load	node	resistance (ohms)	reactance (ohms)	inductance (mH)	capacitance (uF)	passive circuit
1	22	0	7,600.	0	0	0
2	1	0	11,500.	0	0	0

IMPEDANCE

normalization = 50.

freq (KHz)	resist (ohms)	react (ohms)	imped (ohms)	phase (deg)	VSWR	S11 dB	S12 dB
source = 1; node 1,170.	55.758	63.805	84.735	48.9	3.1552	-5.7021	-1.361

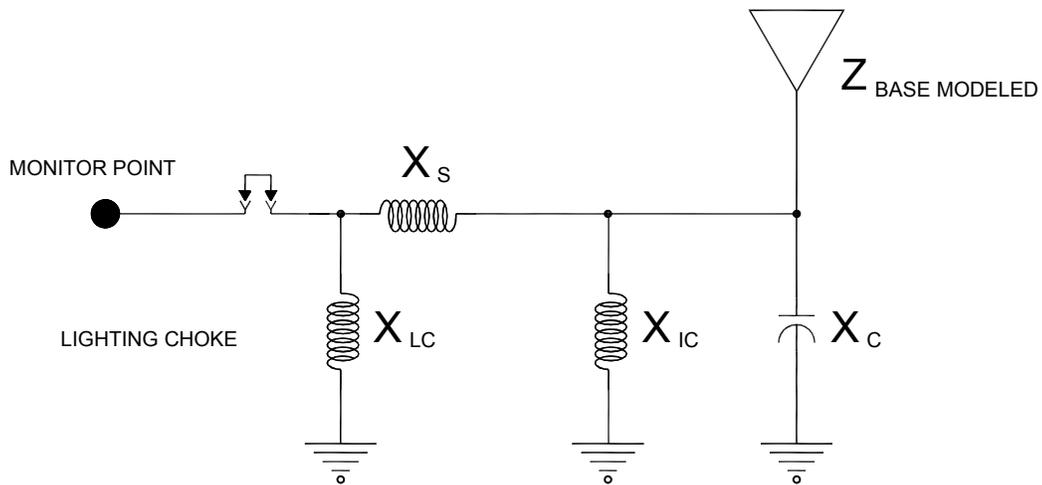

TOWER	X_{LC} (Ω)	X_S (Ω)	X_{IC} (Ω)	X_C (Ω)	Z_{BASE} MODELED (Ω)	Z_{MP} MODELED (Ω)	Z_{MP} MEASURED (Ω)
#1	+j2600	+j26	-j25325	-j3000	64.7 + j84.3	62.5 + j108.1	62.9 + j108.1
#2	+j2600	+j20	-----	-j4000	56.9 + j67.5	55.0 + j86.1	55.0 + j86.4
#3	+j2600	+j28	-----	-j6500	55.8 + j63.8	53.1 + j89.9	53.4 + j90.2

Dwayne Straume, H&D

10/3/2016

KPUG MOM TABLE.dwg

HATFIELD & DAWSON
CONSULTING ENGINEERS

ANALYSIS OF TOWER IMPEDANCE MEASUREMENTS TO VERIFY
METHOD OF MOMENTS MODEL

RADIO STATION KPUG 1170 kHz

BELLINGHAM, WA

10/2016

Item 3

Method of Moments Model Details for Directional Antenna- KPUG

The array of towers was modeled using MININEC with the individual tower characteristics that were verified by the individual tower impedance measurements. Calculations were made to determine the complex voltage values for sources located at ground level under each tower of the array to produce current moment sums for the towers that, when normalized, equated to the theoretical field parameters of the authorized directional antenna patterns. The following pages contain details of the method of moments models of the directional antenna patterns.

KPUG Driven Array

GEOMETRY

Wire coordinates in degrees; other dimensions in meters

Environment: perfect ground

wire	caps	Distance	Angle	Z	radius	segs
1	none	0	0	0	.29	21
		0	0	101.7		
2	none	67.7	110.	0	.29	21
		67.7	110.	99.5		
3	none	135.4	110.	0	.29	21
		135.4	110.	98.		

Number of wires = 3
current nodes = 63

Individual wires segment length radius	minimum		maximum	
	wire	value	wire	value
	3	4.66667	1	4.84286
	1	.29	1	.29

ELECTRICAL DESCRIPTION

Frequencies (KHz)

no.	frequency		no. of steps	segment length (wavelengths)	
	lowest	step		minimum	maximum
1	1,170.	0	1	.012963	.0134524

Sources

source	node	sector	magnitude	phase	type
1	1	1	1,170.05	337.7	voltage
2	22	1	1,085.68	59.9	voltage
3	43	1	183.815	157.2	voltage

IMPEDANCE

normalization = 50.

freq (KHz)	resist (ohms)	react (ohms)	imped (ohms)	phase (deg)	VSWR	S11 dB	S12 dB
source = 1; node 1, sector 1 1,170.	98.309	253.02	271.45	68.8	15.434	-1.1271	-6.4096
source = 2; node 22, sector 1 1,170.	54.651	74.981	92.784	53.9	3.8024	-4.6786	-1.808
source = 3; node 43, sector 1 1,170.	17.075	23.315	28.898	53.8	3.6311	-4.911	-1.6927

CURRENT rms

Frequency = 1170 KHz
 Input power = 5,000. watts
 Efficiency = 100. %

coordinates in degrees

current				mag	phase	real	imaginary
no.	X	Y	Z	(amps)	(deg)	(amps)	(amps)
GND	0	0	0	3.04788	269.	-.0556347	-3.04737
2	0	0	4.84286	3.52349	265.9	-.250144	-3.5146
3	0	0	9.68571	3.79033	264.5	-.365128	-3.77271
4	0	0	14.5286	3.98705	263.4	-.457482	-3.96072
5	0	0	19.3714	4.12707	262.6	-.532801	-4.09253
6	0	0	24.2143	4.21649	261.9	-.593561	-4.1745
7	0	0	29.0571	4.25838	261.3	-.640932	-4.20987
8	0	0	33.9	4.25468	260.9	-.675576	-4.2007
9	0	0	38.7429	4.20686	260.5	-.697935	-4.14856
10	0	0	43.5857	4.11622	260.1	-.708366	-4.05481
11	0	0	48.4286	3.98402	259.8	-.707192	-3.92075
12	0	0	53.2714	3.8116	259.5	-.694754	-3.74775
13	0	0	58.1143	3.60034	259.3	-.671422	-3.53718
14	0	0	62.9571	3.35168	259.	-.637588	-3.29048
15	0	0	67.8	3.06709	258.8	-.593668	-3.00909
16	0	0	72.6429	2.74797	258.7	-.540083	-2.69437
17	0	0	77.4857	2.39555	258.5	-.477224	-2.34754
18	0	0	82.3286	2.01058	258.4	-.405388	-1.96929
19	0	0	87.1714	1.59276	258.2	-.324649	-1.55932
20	0	0	92.0143	1.13927	258.1	-.234527	-1.11487
21	0	0	96.8571	.64121	258.	-.133233	-.627215
END	0	0	101.7	0	0	0	0
GND	-23.1548	-63.6172	0	8.274	6.	8.2286	.865591
23	-23.1548	-63.6172	4.7381	8.63721	4.2	8.6144	.627241
24	-23.1548	-63.6172	9.47619	8.80319	3.1	8.79005	.480885
25	-23.1548	-63.6172	14.2143	8.88355	2.3	8.87638	.356822
26	-23.1548	-63.6172	18.9524	8.88911	1.6	8.88565	.24831
27	-23.1548	-63.6172	23.6905	8.82516	1.	8.82385	.152382
28	-23.1548	-63.6172	28.4286	8.69485	.4	8.69459	.0676891
29	-23.1548	-63.6172	33.1667	8.50042	360.	8.50041	-6.45E-03
30	-23.1548	-63.6172	37.9048	8.24389	359.5	8.24359	-.070418
31	-23.1548	-63.6172	42.6429	7.9275	359.1	7.92653	-.124419
32	-23.1548	-63.6172	47.381	7.55336	358.7	7.55148	-.168588
33	-23.1548	-63.6172	52.1191	7.12381	358.4	7.12092	-.203018
34	-23.1548	-63.6172	56.8572	6.64127	358.	6.63736	-.227782
35	-23.1548	-63.6172	61.5952	6.10831	357.7	6.10348	-.242946
36	-23.1548	-63.6172	66.3333	5.52746	357.4	5.52187	-.248576
37	-23.1548	-63.6172	71.0714	4.90112	357.1	4.89501	-.244726
38	-23.1548	-63.6172	75.8095	4.23133	356.9	4.225	-.231425
39	-23.1548	-63.6172	80.5476	3.51928	356.6	3.51309	-.208643
40	-23.1548	-63.6172	85.2857	2.76438	356.3	2.75876	-.176208
41	-23.1548	-63.6172	90.0238	1.96171	356.1	1.95716	-.133594
42	-23.1548	-63.6172	94.7619	1.09626	355.8	1.09338	-.0794321
END	-23.1548	-63.6172	99.5	0	0	0	0
GND	-46.3095	-127.234	0	4.49771	103.4	-1.03999	4.37582
44	-46.3095	-127.234	4.66667	4.5499	102.8	-1.00629	4.43722
45	-46.3095	-127.234	9.33333	4.55233	102.4	-.979251	4.44576
46	-46.3095	-127.234	14.	4.52412	102.1	-.949779	4.4233
47	-46.3095	-127.234	18.6667	4.46737	101.8	-.917096	4.37223
48	-46.3095	-127.234	23.3333	4.38333	101.6	-.880942	4.29389
49	-46.3095	-127.234	28.	4.2729	101.4	-.841302	4.18925

50	-46.3095	-127.234	32.6667	4.13695	101.1	-.798281	4.0592
51	-46.3095	-127.234	37.3333	3.97637	100.9	-.752086	3.9046
52	-46.3095	-127.234	42.	3.79214	100.7	-.702971	3.72641
53	-46.3095	-127.234	46.6667	3.58528	100.5	-.651232	3.52564
54	-46.3095	-127.234	51.3333	3.3569	100.2	-.597215	3.30335
55	-46.3095	-127.234	56.	3.10818	100.	-.541294	3.06068
56	-46.3095	-127.234	60.6667	2.84031	99.8	-.483867	2.79879
57	-46.3095	-127.234	65.3333	2.55449	99.6	-.425345	2.51883
58	-46.3095	-127.234	70.	2.25184	99.4	-.366136	2.22187
59	-46.3095	-127.234	74.6667	1.9333	99.1	-.306632	1.90883
60	-46.3095	-127.234	79.3333	1.59943	98.9	-.247168	1.58021
61	-46.3095	-127.234	84.	1.24998	98.6	-.187966	1.23577
62	-46.3095	-127.234	88.6667	.882765	98.4	-.128983	.873291
63	-46.3095	-127.234	93.3333	.491155	98.1	-.06958	.486201
END	-46.3095	-127.234	98.	0	0	0	0

CURRENT MOMENTS (amp-degrees) rms

Frequency = 1170 KHz

Input power = 5,000. watts

wire	magnitude	phase (deg)	magnitude	phase (deg)
1	323.136	261.	323.136	261.
2	633.599	360.	633.599	360.
3	304.127	101.	304.127	101.

Medium wave array vertical current moment (amps-degrees) rms

(Calculation assumes tower wires are grouped together.

The first wire of each group must contain the source.)

tower	magnitude	phase (deg)
1	323.136	261.
2	633.599	360.
3	304.127	101.

Comparison of Current Moments with Theoretical Antenna Field Parameters


Tower	Current Moment Magnitude	Current Moment Phase	Normalized Magnitude	Normalized Phase	Standard Pattern Ratio	Standard Pattern Phase
1 (W)	323.136	261.0	0.510	-99.0	0.510	-99.0
2 (C)	633.599	360.0	1.0	0	1.0	0
3 (E)	304.127	101.0	0.480	+101.0	0.480	+101.0

As shown in the tables above, the base currents used in the Method of Moments computer model produce current moments in each of the towers that are identical to the field ratios and phases of the theoretical antenna parameters specified in the KPUG station license.

Item 4

Derivation of Operating Parameters for Directional Antenna - KPUG

The currents at the tower reference points have been calculated by using the computer circuit simulation program pspice. A pspice model has been made for each tower using the antenna base currents and base impedances calculated by MININEC and shown above, and the reactances listed previously in the table *Analysis of Tower Impedance Measurements to Verify Method of Moments Model*. The magnitude and phase of the current source in the pspice model (IIN) was adjusted such that the current calculated in the output branch of the pspice model (the current through resistor R_L) was the same as the base current for the tower calculated by MININEC. The current at the reference point is the current source in the pspice model. These calculated currents are then normalized to the reference tower to obtain the antenna monitor phase and ratio readings, as shown in the tables labeled Antenna Monitor Parameters, which follow the pspice data below.

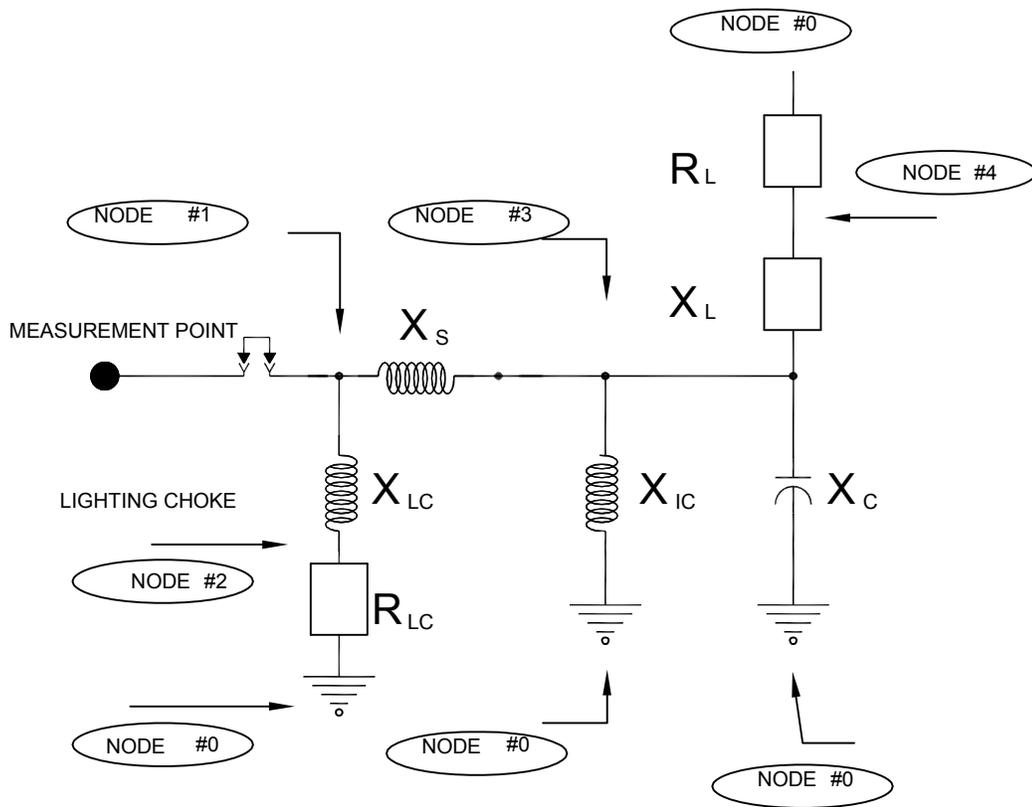

KPUG TOWER 1 NIGHT BASE MODEL

**** CIRCUIT DESCRIPTION

.OPT LIST NOPAGE NODE NOMOD
.AC LIN 1 1170kHz 1170kHz

IIN	0	1	AC 3.146 -91.5
LXlc	1	2	353.7uH
Rlc	2	0	.001ohms
LXs	1	3	3.537uH
CXc	3	0	45.34pF
LXic	3	0	3445uH
LL	3	4	34.416uH
RL	4	0	98.3ohms

.PRINT AC IM(RL) IP(RL)

##.PROBE
.END

**** AC ANALYSIS TEMPERATURE = 27.000 DEG C

FREQ	IM(RL)	IP(RL)
1.170E+06	3.048E+00	-9.102E+01

KPUG TOWER 2 NIGHT BASE MODEL

**** CIRCUIT DESCRIPTION

.OPT LIST NOPAGE NODE NOMOD
.AC LIN 1 1170kHz 1170kHz

IIN	0	1	AC 8.42 5.591
LX1c	1	2	353.7uH
R1c	2	0	.001ohms
LXs	1	3	2.721uH
CXc	3	0	34pF
LL	3	4	10.202uH
RL	4	0	54.7ohms

.PRINT AC IM(RL) IP(RL)

##.PROBE
.END

**** AC ANALYSIS TEMPERATURE = 27.000 DEG C

FREQ	IM(RL)	IP(RL)
1.170E+06	8.274E+00	6.000E+00

KPUG TOWER 3 NIGHT BASE MODEL

**** CIRCUIT DESCRIPTION

.OPT LIST NOPAGE NODE NOMOD
.AC LIN 1 1170kHz 1170kHz

IIN	0	1	AC 4.57 103.2
LX1c	1	2	353.7uH
RLc	2	0	.001ohms
LXs	1	3	3.81uH
CXc	3	0	20.93pF
LL	3	4	3.17uH
RL	4	0	17.1ohms

.PRINT AC IM(RL) IP(RL)

##.PROBE
.END

**** AC ANALYSIS TEMPERATURE = 27.000 DEG C

FREQ	IM(RL)	IP(RL)
1.170E+06	4.498E+00	1.034E+02

Antenna Monitor Parameters - KPUG

Tower	Ref Point Current Magnitude	Ref Point Current Phase	Normalized Magnitude	Normalized Phase
1 (W)	3.146	-91.5°	0.374	-97.1°
2 (C)	8.42	5.591°	1.0	0°
3 (E)	4.57	103.2°	0.543	+97.6°

Post Construction Array Geometry Statement & Survey - KPUG

Because the KPUG antenna system has been previously licensed (BZ-20071121ADE) via a traditional measurement based proof of performance and there have been no changes made to the theoretical antenna parameters, a post-construction survey is not required per FCC Public Notice DA 09-2340. (October 29, 2009)

Item 5


Direct Measurement of Power - KPUG

Common point impedance measurements were made using a Hewlett Packard 8751A network analyzer in a calibrated measurement system. The measurements were made at the phasor cabinet input jack adjacent to the common point current meter that is used to determine operating power. The impedance measured at this point was adjusted to a value of $50 \pm j0$ Ohms. Daytime operating power is also measured at the common point meter.

Certification

This engineering exhibit has been prepared personally by the undersigned or under my immediate supervision, and all representations are true and correct to the best of my knowledge. I am an experienced radio engineer whose qualifications are a matter of record with the Federal Communications Commission, I am an engineer in the firm of Hatfield & Dawson Consulting Engineers, LLC, and I am Registered as a Professional Engineer in the States of Washington and Oregon.

October 3, 2016

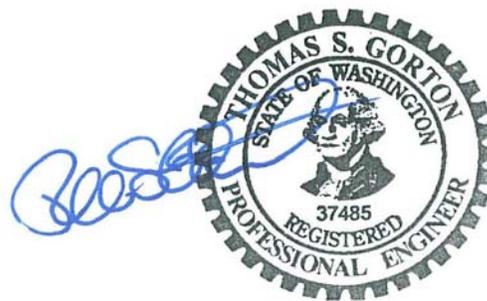

Thomas S. Gorton P.E.

APPENDIX A: FCC Form 302-AM

SECTION III - Page 2

9. Description of antenna system ((f directional antenna is used, the information requested below should be given for each element of the array. Use separate sheets if necessary.)

Type Radiator (3) Uniform cross-section guyed steel tower	Overall height in meters of radiator above base insulator, or above base, if grounded. 65.55	Overall height in meters above ground (without obstruction lighting) 67.0	Overall height in meters above ground (include obstruction lighting) 68.1	If antenna is either top loaded or sectionalized, describe fully in an Exhibit. Exhibit No.
--	---	--	--	--

Excitation Series Shunt

Geographic coordinates to nearest second. For directional antenna give coordinates of center of array. For single vertical radiator give tower location.

North Latitude	48 ^o	46'	33"	West Longitude	122 ^o	26'	23"
----------------	-----------------	-----	-----	----------------	------------------	-----	-----

If not fully described above, attach as an Exhibit further details and dimensions including any other antenna mounted on tower and associated isolation circuits.

Exhibit No.
1

Also, if necessary for a complete description, attach as an Exhibit a sketch of the details and dimensions of ground system.

Exhibit No.

No change in data on file - BMML-20151005AFK

10. In what respect, if any, does the apparatus constructed differ from that described in the application for construction permit or in the permit?

DNA

11. Give reasons for the change in antenna or common point resistance.

No Change

I certify that I represent the applicant in the capacity indicated below and that I have examined the foregoing statement of technical information and that it is true to the best of my knowledge and belief.

Name (Please Print or Type) Thomas S. Gorton P.E.	Signature (check appropriate box below) 
Address (include ZIP Code) Hatfield & Dawson Consulting Engineers 9500 Greenwood Ave N Seattle, WA 98103	Date October 3, 2016
	Telephone No. (Include Area Code) 206-783-9151

Technical Director

Registered Professional Engineer

Chief Operator


Technical Consultant

Other (specify)

FM AUX
ANTENNA

HEIGHT
68.1 M

64 M

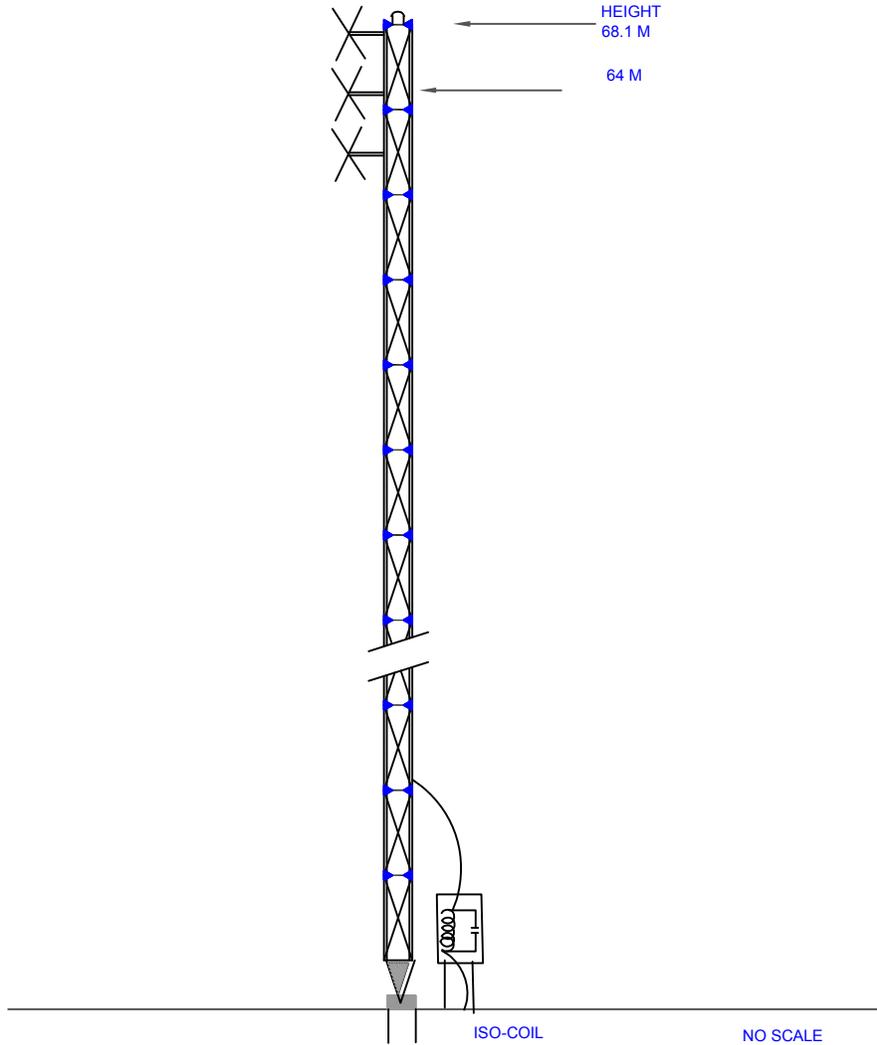

NO SCALE
NOT FOR CONSTRUCTION

Dwayne Straume, H&D 9/30/2016 11:30 AM KPUG Antenna.dwg

HATFIELD & DAWSON
CONSULTING ENGINEERS

TOWER #1 EXHIBIT 1

KPUG-AM

BELLINGHAM WASHINGTON

10/2016