

Exhibit 14 - Statement B
DAYTIME ALLOCATION AND COVERAGE CONSIDERATIONS
prepared for
Global Radio, L.L.C.
WNWR(AM) Bala Cynwyd, PA
1540 kHz 50 kW DA-D
Facility ID 1027

Global Radio, L.L.C. (“*Global*”) proposes no changes in the operation of WNWR as specified in BL-19940525AA other than the change in community of license to Bala Cynwyd, Pennsylvania. Nevertheless, the proposed coverage contours are shown in **Exhibit 14 - Figure 2**. These contours utilize ground conductivities obtained from FCC Figure M3 and, where available, the most recent WNWR proof of performance and recent measurements taken for the purpose of this application. Distances to contours and associated ground conductivity data for the proposed WNWR facility are summarized in **Exhibit 14 - Table II**.


Since there is no actual change in the existing licensed operation of WNWR, the locations of the protected and interfering contours of nearby stations located on the same channel, and within three channels above and below the frequency of use, are not included herein with the one exception noted below. These can be provided upon request.

An application that proposes relocation of station WNYG to Elizabeth, New Jersey and operation on 1530 kHz (file number BMJP-20040129AXY) was filed during the same January 2004 major change filing window. The WNYG application proposes to create new prohibited contour overlap with the licensed WNWR facility as well as the proposed WNWR facility when FCC Figure M3 ground conductivities are used. This prohibited overlap results in *Global*’s proposal to change community of license being mutually exclusive with the WNYG application under the Commission’s current rules and policies. However, recent field strength measurements taken on behalf of *Global* and reported herein show that in actual practice there is no prohibited contour overlap.

The WNYG application proposes to collocate with station WNSW (1430 kHz, Newark, NJ, Facility Id 73332). Field strength measurements and the resulting analyzed ground conductivity from the WNSW (then WNJR) 1988 proof of performance were used for the 170° and 266° radials. Field strength measurements along the WNSW 228° radial and the WNWR 34°, 47°, and 60° radials performed by R. M. Burrow, Jr., P.E. were used to determine the actual ground conductivity between

Exhibit 14 - Statement B
DAYTIME ALLOCATION AND COVERAGE CONSIDERATIONS
(Page 2 of 2)

these two facilities. **Exhibit 14 - Figures 4 and 5** show the resulting measured values and analyzed ground conductivities. These ground conductivities were used to calculate the contours for the proposed WNYG and WNWR facilities in **Exhibit 14 – Figure 3**. As shown therein, no contour overlap is predicted to occur.

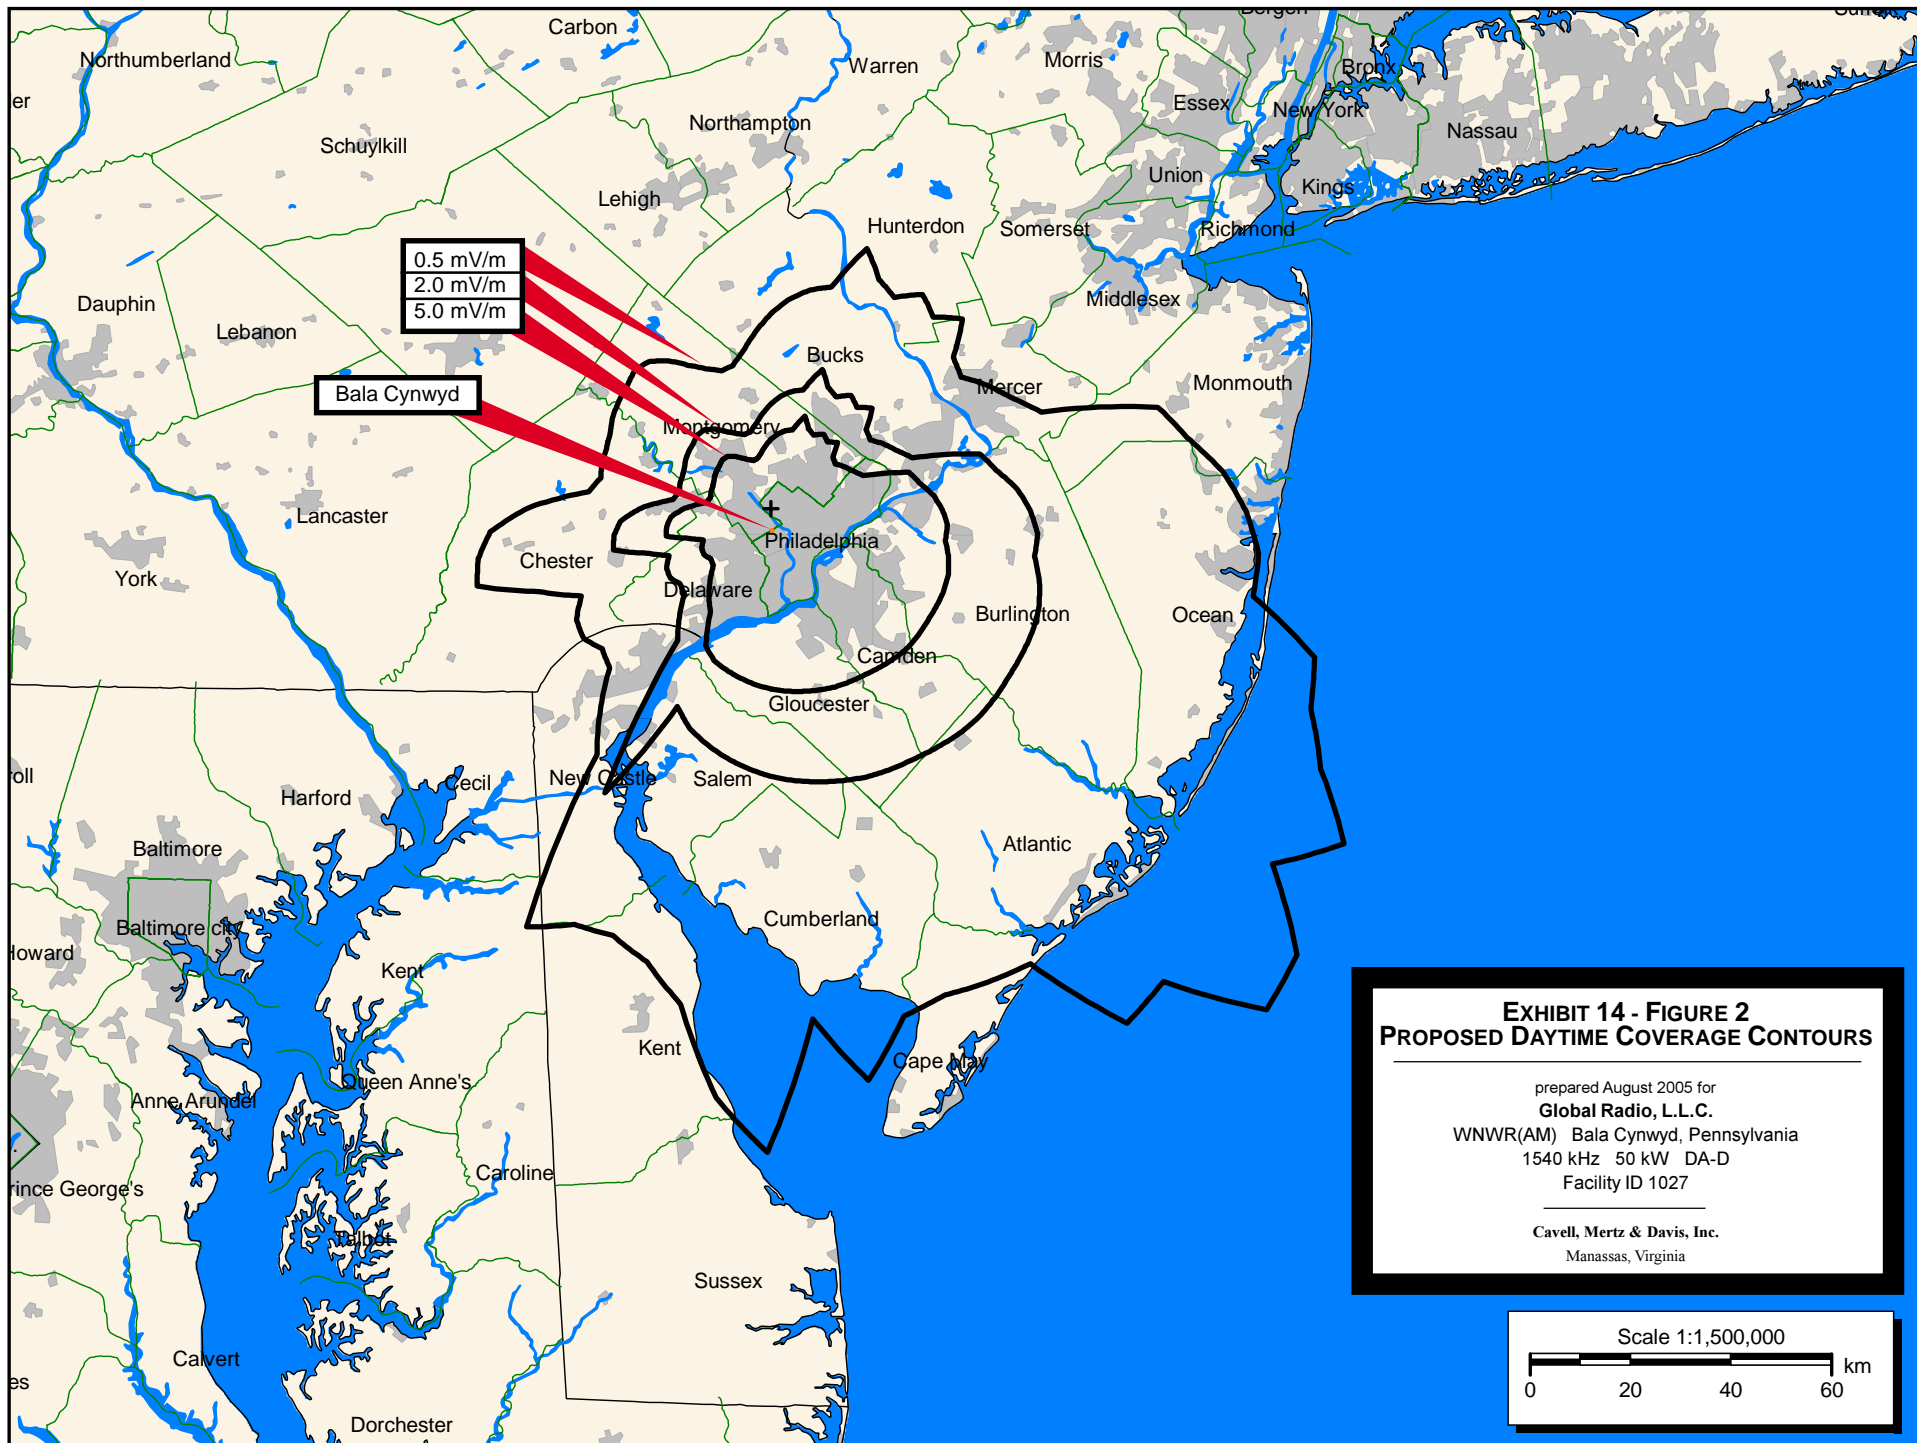

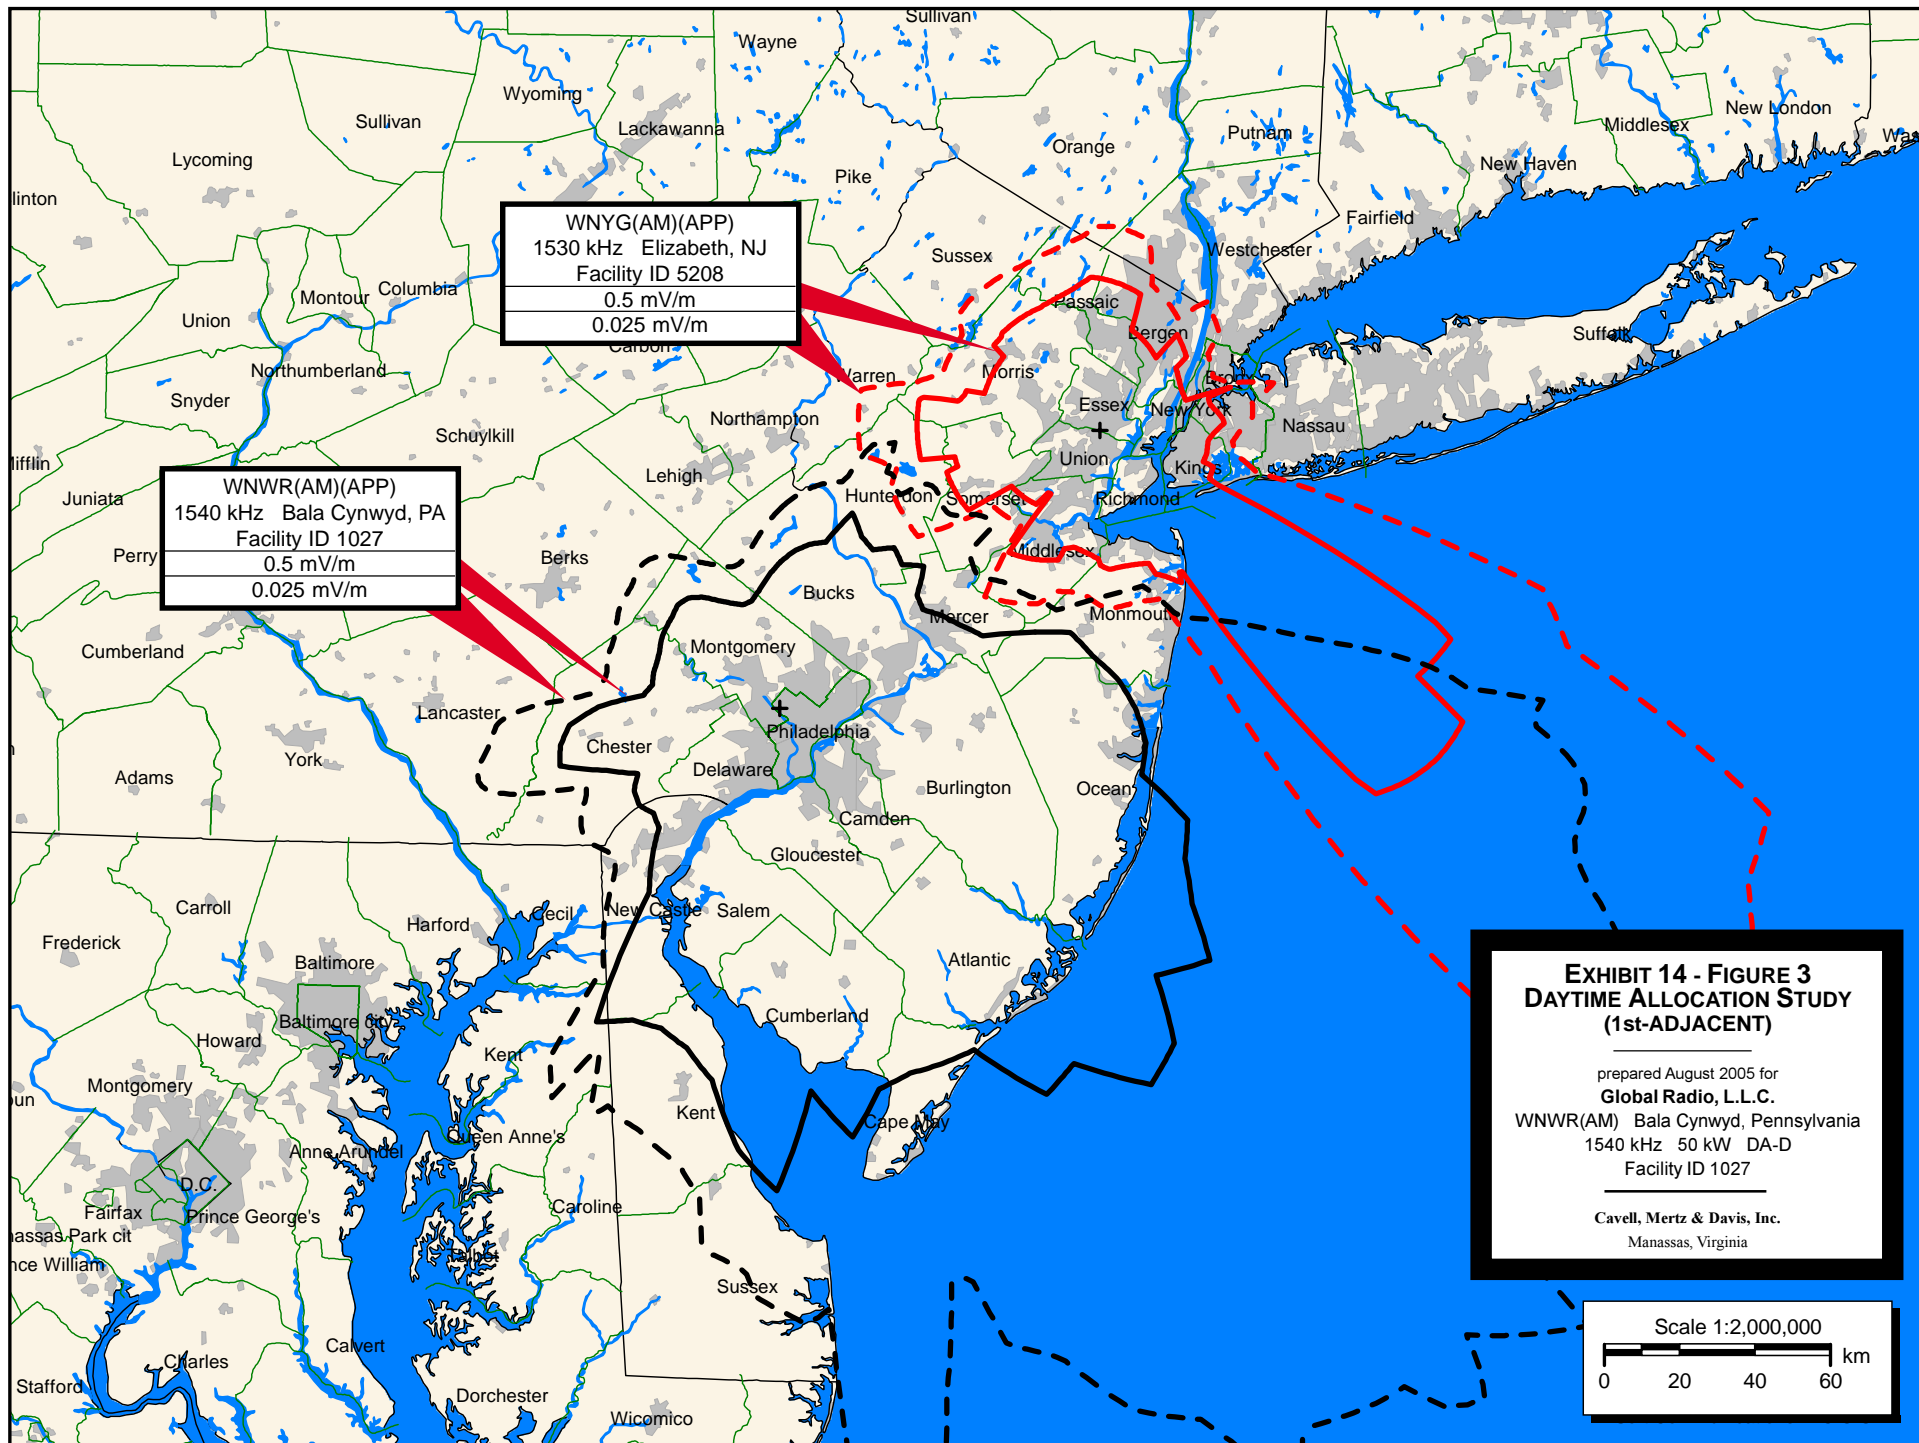


Exhibit 14 - Table II
PROPOSED DAYTIME DISTANCE TO CONTOURS

prepared for
Global Radio, L.L.C.
 WNWR(AM) Bala Cynwyd, PA
 1540 kHz 50 kW DA-D
 Facility ID 1027

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distances To Contours</u>			
			5.0 mV/m (km)	2.0 mV/m (km)	0.5 mV/m (km)	0.25 mV/m (km)
0	467.43	4-99.9, 2-129.1, 4-536.3, 10-615.5, 4-641.5 4-827.5, 2-1300	13.8	20.9	38.9	53.1
5	550.95	4-104.9, 2-135.6, 4-552.9, 10-620.1, 4-638.3 2-822, 2-1300	14.9	22.5	41.9	57.2
10	619.7	4-102.8, 2-144, 4-344.7, 2-345, 4-559.9 10-616.9, 4-666, 2-845.7, 2-1300	15.7	23.7	44.1	60.2
15	666.15	4-98.4, 2-154.6, 4-335.2, 2-445.6, 4-578.5 10-707.8, 4-767.5, 2-914.2, 2-1300	16.2	24.5	45.6	62.2
20	1013.89	4-95.6, 2-165.7, 4-351.7, 2-589.7, 4-675.1 6-789.1, 4-881.7, 2-1048, 2-1300	19.6	29.5	55.1	74.8
25	1094.35	2.5*-50, 3*-87.4, 4-94.1, 2-166, 4-366.2 2-499, 0-614.7, 4-888.8, 5000-1085.2, 2-1206.2 2-1300	17.5	26.6	50.3	68.7
30	1012.61	2.5*-50, 3*-87.4, 4-94.2, 2-160.6, 4-374.4 2-376.7, 1-522.5, 0.5-679.9, 4-689.1, 1-698.5 4-707.3, 1-734.5, 4-747.5, 1-756.3, 4-766.6 1-941.8, 2-1179.6, 5000-1300	16.9	25.7	48.6	66.4
35	1182.67	2.5*-50, 3*-87.4, 4-96.2, 2-142.3, 4-294.9 1-983.6, 2-1126.3, 5000-1135.8, 2-1300.6	18.2	27.6	52.1	71.1
40	1074.26	3*-84.8, 4-102.5, 2-120.5, 4-189.2, 1-508.9 2-779.6, 1-894.9, 2-1190.8, 5000-1300	17.4	26.4	49.9	68.1
45	1254.88	3*-84.8, 4-175.7, 1-259.3, 2-370.4, 1-483.2 2-503.8, 5000-505.6, 2-554.7, 5000-570.6, 2-573.9 5000-609.1, 2-614.7, 5000-630.2, 2-638.3, 5000-642.2 2-703.4, 5000-723.7, 2-783.7, 1-858.5, 2-1115.3 5000-1300	18.7	28.4	53.5	73.0
50	1322.87	2*-84.2, 4-168.9, 1-242.1, 2-472.7, 5000-953 2-1020.6, 4-1075.7, 5000-1080.3, 4-1140.8, 5000-1165.2 4-1201.9, 5000-1300	16.0	24.6	47.1	64.5

Exhibit 14 - Table II
PROPOSED DAYTIME DISTANCE TO CONTOURS
 (Page 2 of 6)

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distances To Contours</u>			
			5.0 mV/m (km)	2.0 mV/m (km)	0.5 mV/m (km)	0.25 mV/m (km)
55	1255	2*-84.2, 4-119.9, 5000-129.9, 4-142.1, 5000-142.5 4-146.2, 5000-152.6, 4-158.6, 5000-163.7, 4-167.1 5000-238.1, 2-443, 5000-879, 2-1121.8, 4-1253.9 5000-1289.8, 1-1300	15.6	24.0	45.9	63.0
60	1472.55	2*-84.2, 4-96.1, 5000-120.5, 0.5-132.4, 5000-136.3 0.5-193.1, 5000-203.3, 0.5-208.9, 5000-282.5, 2-292.3 5000-295.5, 2-302.1, 5000-303.1, 2-366.1, 5000-377.4 2-382.9, 5000-388.4, 2-442.6, 5000-880.4, 2-917.7 5000-922.5, 2-963.5, 5000-1300	16.8	25.9	49.4	67.7
65	1685.87	2*-84.2, 4-106.8, 5000-146.4, 0.5-156.7, 5000-164 0.5-248.3, 5000-420.1, 2-440.8, 5000-444.9, 2-481.5 5000-481.7, 2-484.6, 5000-1300	17.9	27.6	52.6	71.9
70	2006.38	2*-84.2, 4-112.8, 5000-1300	19.5	29.9	57.0	77.6
75	2326.87	4-109.8, 5000-1300	28.4	42.9	79.4	106.2
80	2637.29	4-106, 5000-1300	30.0	45.4	83.8	128.6
85	3122.51	4-103.2, 5000-1300	32.4	49.0	90.0	165.5
90	3487.32	4-98.2, 5000-1300	34.1	51.5	94.3	199.9
95	3753.42	4-97.9, 5000-1300	35.2	53.2	97.2	213.8
100	3758.12	4-97.9, 5000-1300	35.2	53.2	97.3	214.1
105	4088.11	4-97.2, 5000-1300	36.6	55.3	111.9	230.6
110	4336.24	4-99.5, 5000-1300	37.6	56.7	114.3	233.2
115	4445.32	4-98.8, 5000-1300	38.0	57.4	120.7	239.7
120	4484.47	4-95.9, 5000-1300	38.1	57.6	131.8	250.8
125	4517.71	4-99.3, 5000-1300	38.3	57.8	122.0	241.0
130	4588.32	4-95.5, 5000-1300	38.5	58.2	136.9	256.0
135	4635.55	4-95.2, 5000-1300	38.7	58.5	139.9	259.0
140	4590.68	4-100.2, 5000-1300	38.5	58.2	122.0	241.0
145	4500.41	4-98.4, 5000-1300	38.2	57.7	124.2	243.2
150	4413.7	4-106.3, 5000-1300	37.9	57.2	104.0	216.0
155	4332.35	4-19.3, 5000-19.5, 4-112.8, 5000-1300	37.7	56.9	103.4	194.7
160	4213.41	4-19, 5000-19.6, 4-117.6, 5000-1300	37.6	56.5	102.5	178.2

Exhibit 14 - Table II
PROPOSED DAYTIME DISTANCE TO CONTOURS
 (Page 3 of 6)

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distances To Contours</u>			
			5.0 mV/m (km)	2.0 mV/m (km)	0.5 mV/m (km)	0.25 mV/m (km)
165	4038.19	4-18.8, 5000-19.7, 4-100.1, 5000-111.1, 4-126.9 5000-1300	37.2	55.8	104.0	177.8
170	3853.95	4-18.8, 5000-20, 4-94.7, 5000-1300	36.8	55.0	115.0	233.7
175	3662.13	4-18.9, 5000-20.5, 4-96.6, 5000-138.7, 4-153.8 2-179.7, 5000-1300	36.3	54.1	101.6	159.5
180	3436.69	4-19.1, 5000-21.2, 4-86.4, 5000-129.3, 4-155.7 2-206.5, 5000-1300	35.7	53.0	127.7	158.7
185	3178.55	4-19.5, 5000-22.1, 4-81.4, 5000-112.4, 4-158.8 2-247.6, 5000-482.3, 4-485.7, 5000-1300	35.0	51.7	117.4	147.0
190	2890.22	4-20.1, 5000-23.2, 4-76, 5000-88.4, 4-162.3 2-234.6, 5000-239.6, 2-240.6, 5000-254.7, 2-263 5000-263.4, 2-300.2, 5000-367.3, 4-395.5, 5000-404.9 4-429.8, 5000-436.2, 4-441, 5000-457.8, 4-526.3 5000-567.9, 4-575.9, 5000-578.4, 4-581.5, 5000-1300	34.1	50.1	100.0	128.7
195	2576.05	4-20.9, 5000-24.7, 4-71.8, 5000-80.1, 4-166 2-207.3, 5000-210.8, 2-218.6, 5000-355.7, 4-360.7 5000-365, 4-462.8, 5000-472.4, 4-529.7, 5000-535.4 4-577.7, 5000-583.4, 4-612.8, 5000-1300	33.2	48.4	93.2	120.9
200	2242.3	4-21.9, 5000-26.6, 4-67, 5000-76.5, 4-171.3 2-212.1, 5000-261.5, 4-262.2, 5000-273, 4-277.5 5000-291.2, 2-308.1, 5000-308.6, 2-314.3, 5000-315.8 2-328.3, 5000-331.6, 2-346.7, 4-348.8, 5000-356.7 2-366.2, 4-392.4, 2-528.4, 4-679.3, 5000-1300	32.2	46.5	90.3	116.8
205	1897.1	4-24.4, 5000-29, 4-57, 5000-73.8, 4-174.7 40-176.9, 4-178.7, 2-204.2, 5000-228.8, 4-238.5 5000-252, 4-279.3, 5000-285, 2-313.7, 5000-316.7 2-342.7, 5000-347.4, 2-566, 4-759.2, 5000-1318.3	30.2	43.4	91.2	116.2

Exhibit 14 - Table II
PROPOSED DAYTIME DISTANCE TO CONTOURS
(Page 4 of 6)

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distances To Contours</u>			
			5.0 mV/m (km)	2.0 mV/m (km)	0.5 mV/m (km)	0.25 mV/m (km)
210	1550.38	4-28.1, 5000-60.7, 4-148, 40-150.1, 4-158.9 40-163.3, 4-166.4, 40-180.2, 4-182.1, 40-190 5000-207.3, 4-215.2, 5000-219.6, 4-236.9, 5000-243.4 4-273.2, 5000-276.1, 2-563.7, 4-607.7, 2-704 4-956.1, 5000-1191.3, 8-1196.4, 5000-1202.3, 8-1217.8 4-1285.1, 2-1300	23.7	65.3	96.1	119.4
215	1213.81	4-139.1, 40-142.7, 4-147.4, 40-193.2, 4-212.4 5000-216.2, 4-239.9, 5000-251.2, 4-270.1, 2-552.7 4-604, 2-791.2, 4-1223.9, 2-1300	21.2	32.0	59.7	80.9
220	901.42	4-94.8, 40-97.7, 4-135.6, 40-172.3, 4-239.4 5000-242.6, 4-265.8, 2-492.9, 4-754.6, 2-1021.2 4-1202.4, 2-1300	18.6	28.0	52.2	71.1
225	645.53	4-73.7, 40-78.5, 4-79.9, 40-105.7, 4-112.8 40-147.5, 4-151.1, 40-153.9, 4-158.7, 40-160.5 4-248.4, 5000-253.5, 4-255.9, 2-481.7, 4-584.9 2-623.7, 4-682.9, 2-783.1, 4-1300	16.0	24.1	45.0	61.3
230	599.26	4-80.5, 40-98.9, 4-113.5, 40-116.9, 4-121.5 40-132, 4-133.9, 40-135.4, 4-139.8, 40-147.6 4-202.5, 5000-203.5, 4-215.2, 2-914.1, 4-1037.6 1-1111.3, 4-1134.8, 2-1169.1, 4-1300	15.5	23.3	43.5	59.3
235	652.96	4-147.9, 40-149.4, 4-157.6, 2-1236.5, 4-1300	16.1	24.2	45.2	61.7
240	627.93	4-133.7, 2-635.1, 4-806.4, 2-986.3, 4-1075.1 2-1249.9, 4-1300.1	15.8	23.8	44.4	60.6
245	536.33	4-127.3, 2-996, 4-1300	14.7	22.2	41.3	56.5
250	772.86	4-136.2, 2-913.2, 4-1300	17.4	26.1	48.8	66.4
255	1239.36	4-167.1, 2-292.5, 4-406.9, 2-767.2, 8-840.3 4-1300	21.4	32.3	60.2	81.6
260	1178.04	4-174.3, 2-260.1, 4-458.2, 2-739.5, 8-903.7 4-1010.8, 8-1300	21.0	31.6	58.9	79.8
265	1046.07	4-162.3, 2-238.4, 4-410.2, 2-703.3, 8-1281.7 15-1300	19.9	29.9	55.8	75.8

Exhibit 14 - Table II
PROPOSED DAYTIME DISTANCE TO CONTOURS
(Page 5 of 6)

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distances To Contours</u>			
			5.0 mV/m (km)	2.0 mV/m (km)	0.5 mV/m (km)	0.25 mV/m (km)
270	747.11	4-151.2, 2-225.7, 4-564.6, 8-1162.9, 15-1300	17.1	25.7	48.0	65.4
275	402.34	4-143.5, 2-217.9, 4-288.4, 2-304.5, 4-507.1 8-667.8, 15-943.8, 8-1117.2, 15-1254.9, 8-1300	12.9	19.5	36.3	49.6
280	353.9	4-137.8, 2-213.4, 4-274.5, 2-337.2, 4-464.3 8-652.5, 15-721.7, 8-831, 15-856.4, 8-1078.9 15-1146.7, 8-1300	12.1	18.4	34.3	46.9
285	364.3	4-131.6, 2-214.4, 4-266, 2-377.1, 4-431.5 8-651.1, 15-721.8, 8-884.3, 2-987.3, 8-1300	12.3	18.7	34.7	47.5
290	364.67	4-124.4, 2-224.6, 4-255.7, 2-419.2, 8-617.9 10-689.8, 8-785.5, 4-848.4, 2-958.4, 8-1085.4 15-1114.1, 8-1273.6, 4-1300	12.3	18.7	34.7	47.5
295	375.86	4-117, 2-420.5, 8-571.7, 10-626.9, 20-691.1 15-696.3, 8-940.3, 2-991, 8-1107.9, 15-1159.3 8-1236.3, 4-1300	12.5	18.9	35.2	48.1
300	402.34	4-103.9, 2-412.2, 4-475.4, 8-519.3, 10-595.2 20-679.4, 15-750.7, 8-952.6, 2-1026.1, 8-1222.6 4-1300	12.9	19.5	36.3	49.6
305	417.51	4-95, 2-284.8, 4-450.6, 8-477.4, 10-510.3 4-512.2, 10-519.8, 4-567.7, 20-652, 6-656.2 10-687.1, 8-720.3, 15-792.8, 8-1195.4, 4-1300	13.1	19.9	36.9	50.5
310	429.93	4-89.9, 2-228.2, 4-417.5, 8-454.1, 10-495.4 20-532.2, 4-587.4, 6-678.5, 10-726.2, 8-1188.9 4-1291.6, 8-1291.8, 4-1300.2	13.3	20.1	37.4	51.1
315	457.6	4-86.5, 2-200.5, 4-412.7, 8-441.8, 10-454.9 20-538, 4-598.5, 6-706.2, 10-790, 8-1300	13.7	20.7	38.5	52.6
320	443.26	4-84, 2-181.3, 4-410.1, 8-489.7, 15-530 6-566.8, 4-688.5, 10-695.2, 4-709.4, 10-712.5 4-725, 10-725.3, 4-780.2, 10-835.1, 4-881.6 10-924.3, 2-1102.1, 8-1205.1, 2-1248.8, 8-1300	13.5	20.4	37.9	51.9
325	387.58	4-82.3, 2-141.3, 4-359.5, 8-483.8, 15-521.3 6-594.8, 4-660.6, 10-824.3, 2-1300	12.7	19.2	35.7	48.8

Exhibit 14 - Table II
PROPOSED DAYTIME DISTANCE TO CONTOURS
 (Page 6 of 6)

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distances To Contours</u>			
			5.0 mV/m (km)	2.0 mV/m (km)	0.5 mV/m (km)	0.25 mV/m (km)
330	319.17	4-82.1, 2-126, 4-381.1, 8-460, 15-503 6-608.6, 1-718.6, 2-1268.8, 6-1300	11.6	17.6	32.7	44.7
335	273.96	4-82.5, 2-121.3, 4-399.9, 8-437.4, 15-488.1 6-572.8, 1-719.6, 2-1074.1, 6-1251, 2-1300	10.7	16.4	30.5	41.7
340	245.05	4-83.6, 2-120.7, 4-387.2, 8-421.5, 15-453.9 4-558.3, 1-731.6, 2-1009, 6-1164.7, 2-1300	10.2	15.6	29.1	39.7
345	251.42	4-85.9, 2-121.3, 4-395.8, 8-434.5, 15-476.3 10-491.8, 4-554.9, 1-707.1, 2-980.4, 6-1080.6 2-1300	10.3	15.8	29.4	40.2
350	301.17	4-89.4, 2-122.9, 4-433.1, 8-442.6, 4-444.8 8-453.5, 4-468.5, 15-480.2, 10-508.5, 4-674.9 2-956.1, 6-1013.3, 2-1227, 2-1300	11.2	17.2	31.9	43.6
355	379.46	4-94, 2-125.4, 4-496.2, 10-551.9, 4-638.4 2-866.8, 2-1300	12.5	19.0	35.4	48.4

Exhibit 14 - Table III
PROPOSED WNYG DISTANCE TO CONTOURS

prepared for
Global Radio, L.L.C.
 WNWR(AM) Bala Cynwyd, PA
 1540 kHz 50 kW DA-D
 Facility ID 1027

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	Distance to Contours	
			0.50 mV/m (km)	0.25 mV/m (km)
0	506.7	4-50.2, 2-58.1, 4-249.2, 2-292.1, 4-477.1 10-535.8, 4-556.8, 2-744.6, 2-1300	40.3	54.0
5	488.3	4-253.3, 2-344.7, 4-478.9, 10-548.6, 4-599.6 2-758.8, 2-1300	39.6	54.2
10	467.6	4-260.9, 2-469.7, 4-529.2, 10-618.2, 4-671 2-803.1, 2-1300	38.9	53.1
15	444.7	4-266.2, 2-495.7, 4-575.7, 6-685.3, 4-746.3 2-891, 2-1300	38.0	51.9
20	419.9	4-269.9, 2-390, 0.5-511.5, 4-733.3, 5000-758.8 4-868.2, 2-1016.8, 2-1300	37.0	50.6
25	393.7	4-229.6, 1-407.3, 0.5-562.7, 4-863.4, 2-954.2 5000-1050.9, 2-1052.3, 5000-1068.9, 2-1134.2, 2-1300	36.0	49.2
30	366.6	4-77.1, 1-862.5, 2-1112.5, 5000-1265.5, 2-1300	34.8	47.6
35	339.3	4-69.1, 1-416.4, 2-541.8, 1-856.5, 2-1029.7 5000-1041.3, 2-1198.8, 5000-1275.1, 2-1299.6, 5000-1300	33.6	46.0
40	312.6	4-63.9, 1-160.2, 2-184.4, 1-392.1, 2-684.9 1-775.8, 2-1083.4, 5000-1301.2	32.4	44.3
45	287.4	4-60.4, 1-143, 2-265.5, 1-369, 2-380.7 5000-392.5, 2-419.7, 5000-425.9, 2-443.1, 5000-496.6 2-502, 5000-517.1, 2-525.5, 5000-529.5, 2-591.7 5000-612.1, 2-671.9, 1-747.1, 2-1004.5, 5000-1300	31.2	42.7
50	264.5	4-58.2, 1-133.2, 2-363.8, 5000-716.6, 1-748.7 5000-807.8, 2-829.7, 5000-833.5, 2-919.5, 4-1018.8 5000-1048.3, 4-1080.9, 5000-1300	30.1	41.1
55	245.0	4-56.6, 1-126.1, 2-320.2, 5000-805.5, 2-819.6 5000-832.2, 2-947.5, 5000-990.6, 4-1079.6, 5000-1205 1-1283.4, 5000-1300	29.1	39.7
60	229.6	4-54, 5000-103.1, 1-120.6, 2-125.3, 5000-128.6 2-335.3, 5000-753.5, 2-911.8, 5000-946.7, 2-970.3 5000-981.5, 2-1034.7, 5000-1040.8, 2-1057.8, 5000-1065.1 2-1130.4, 5000-1143.2, 4-1190.2, 5000-1300	28.2	38.5
65	218.9	4-40, 5000-149.5, 2-171.3, 5000-172.6, 2-258.1 5000-269.9, 2-275.5, 5000-278.8, 2-335.9, 5000-372.1 2-375.4, 5000-1300	27.6	37.7
70	212.9	4-27.6, 5000-36.3, 4-38.6, 5000-44.7, 4-48.6 5000-53.7, 4-70, 5000-74.3, 4-77, 5000-208.5 2-242.5, 5000-243.9, 2-247.7, 5000-269.3, 2-279.5 5000-282.8, 2-292.4, 5000-317.8, 2-378.9, 5000-1300	27.3	55.2

Exhibit 14 - Table III
PROPOSED WNYG DISTANCE TO CONTOURS
(Page 2 of 5)

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distance to Contours</u>	
			0.50 mV/m (km)	0.25 mV/m (km)
75	211.3	4-24.7, 5000-27.7, 4-31.2, 5000-34.1, 4-36.7 5000-42.4, 4-50, 5000-51.9, 4-59.8, 0.5-85.5 5000-95.8, 0.5-110.9, 5000-150, 0.5-160.1, 5000-1300	30.0	47.7
80	213.1	4-19.6, 5000-20.7, 4-22.5, 5000-25.5, 4-49.4 0.5-139.2, 5000-154.8, 0.5-185.3, 5000-1300	31.0	41.0
85	217.4	4-17.8, 5000-20.5, 4-20.8, 5000-23.8, 4-37.3 0.5-135.4, 5000-1300	32.7	40.6
90	223.0	4-16.4, 5000-22.5, 4-27.4, 0.5-83.5, 5000-1300	31.0	37.2
95	229.0	4-15.3, 5000-21.4, 4-21.8, 0.5-64.5, 5000-1300	28.9	35.2
100	234.7	4-14.5, 5000-20.8, 0.5-31.8, 5000-32.8, 0.5-57.2 5000-1300	28.9	36.1
105	239.4	4-14.3, 5000-20.5, 0.5-31.8, 5000-39.9, 0.5-49.1 5000-1300	28.7	42.7
110	242.8	4-15.1, 5000-20.3, 0.5-32.1, 5000-1300	28.2	69.9
115	244.7	4-16.2, 5000-21, 0.5-31.5, 5000-1300	28.4	82.3
120	244.9	4-17.6, 5000-22.7, 0.5-27.7, 5000-1300	56.7	158.3
125	243.3	4-19.4, 5000-1300	130.8	232.2
130	240.2	4-19.9, 5000-1300	123.6	224.8
135	235.7	4-19.6, 5000-1300	124.4	225.3
140	230.2	4-19.5, 5000-1300	122.8	223.4
145	224.2	4-19.5, 5000-35.9, 4-37.3, 5000-1300	103.3	203.6
150	218.4	4-19.6, 5000-36.6, 4-43.7, 5000-1300	43.2	137.9
155	213.8	4-19.9, 5000-32.9, 4-51.1, 5000-1300	39.3	49.2
160	211.4	3*-4.2, 4*-11, 5*-22.2, 5000-30.6, 4-58.6 5000-1300	37.4	47.4
165	212.3	3*-4.2, 4*-11, 5*-22.2, 5000-29.8, 4-69.2 5000-1300	36.7	46.7
170	217.3	3*-4.2, 4*-11, 5*-22.2, 5000-29.2, 4-72.1 5000-74.9, 4-79.7, 5000-1300	36.5	46.6
175	227.1	3*-4.2, 4*-11, 5*-22.2, 5000-28.9, 4-100.2 5000-1300	36.7	47.0
180	241.5	3*-4.2, 4*-11, 5*-22.2, 5000-26.9, 4-120 5000-1300	35.7	46.3
185	260.3	4-21.6, 5000-24.9, 4-129, 5000-138.3, 4-141.3 5000-1300	32.9	43.8
190	282.6	4-22.2, 5000-23.3, 4-157.3, 5000-160.8, 4-163.4 5000-1300	32.0	43.3
195	307.4	4-202.4, 5000-544.3, 4-592.4, 5000-1300	32.2	44.0
200	333.9	4-180.3, 5000-224.6, 4-242.9, 2-376.1, 5000-452.5 4-539.7, 5000-544.7, 4-545, 5000-561.4, 4-608.4 5000-611.9, 4-615.2, 5000-623, 4-625.4, 5000-633.3 4-653.1, 5000-654.2, 4-675.4, 5000-680.6, 4-704.4 5000-1300	33.4	45.6

Exhibit 14 - Table III
PROPOSED WNYG DISTANCE TO CONTOURS
 (Page 3 of 5)

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distance to Contours</u>	
			0.50 mV/m (km)	0.25 mV/m (km)
205	361.2	4-185.1, 5000-216.3, 4-256.5, 2-320.8, 5000-327.1 2-335.5, 5000-436, 4-456.6, 5000-466.4, 4-536.5 2-616.9, 4-806.7, 5000-814.1, 4-829.1, 5000-1300	34.6	47.3
210	388.3	4-180.6, 5000-201.4, 4-269.3, 2-307.8, 5000-313.9 2-316, 5000-355.2, 4-357.7, 5000-359.6, 4-364.6 5000-366.7, 4-388.8, 5000-395.3, 2-424.6, 5000-428.1 2-445.6, 5000-450.7, 2-670, 4-731.7, 2-751.9 4-934.7, 5000-937.9, 4-965.7, 5000-966.1, 4-974 5000-1300	35.7	48.9
215	414.8	4-177, 5000-184.2, 4-280.7, 4-283.5, 4-286.2 2-293.7, 5000-294.5, 2-310.5, 5000-327.8, 4-339.2 5000-340.9, 4-344.5, 5000-353.6, 4-383.1, 5000-385.3 2-671.6, 4-711.5, 2-850.3, 4-1300	36.8	50.3
220	439.9	2*-1.9, 3*-4, 2*-10, 1.5*-15, 0.5*-21.5 1.5*-29.5, 1*-40, 2*-50, 1*-90, 0.5*-96.6 4-118.4, 5000-118.5, 4-171.2, 5000-182, 4-255.9 4-262.1, 4-263.8, 4-270, 4-282.9, 4-306.7 4-322.6, 5000-326.3, 4-349.4, 5000-361.5, 4-379.5 2-625.4, 4-754.2, 2-971.5, 4-1300	21.4	32.4
225	463.2	2*-1.9, 3*-4, 2*-10, 1.5*-15, 0.5*-21.5 1.5*-29.5, 1*-40, 2*-50, 1*-90, 0.5*-96.6 4-134.4, 5000-153.9, 4-206.2, 4-208.4, 4-245.8 4-267, 4-267.7, 4-273.4, 4-276.9, 4-279.3 4-351.8, 5000-366.2, 4-373.3, 2-594.8, 4-1300	26.3	33.2
230	484.4	2*-1.9, 3*-4, 2*-10, 1.5*-15, 0.5*-21.5 1.5*-29.5, 1*-40, 2*-50, 1*-90, 0.5*-96.6 4-193.9, 4-210.7, 4-225.1, 4-228.5, 4-233.3 4-243.8, 4-245.8, 4-247.3, 4-251.7, 4-259.5 4-314.4, 5000-315.9, 4-330.4, 2-1006.5, 4-1177.9 1-1216.4, 4-1300	26.8	34.0
235	503.3	2*-1.9, 3*-4, 2*-10, 1.5*-15, 0.5*-21.5 1.5*-29.5, 1*-40, 2*-50, 1*-90, 0.5*-96.6 4-247.5, 2-1300	27.3	34.6
240	519.7	4-241, 2-744.1, 4-913.7, 2-1101.3, 4-1164 2-1300	40.8	55.7
245	533.8	4-271.6, 2-1060.5, 4-1300	41.3	56.4
250	545.5	4-267, 2-374.7, 4-508.6, 2-897.9, 8-967.7 2-987, 4-1300	41.7	56.9
255	555.1	4-237.1, 2-330.3, 4-553.2, 2-848.5, 8-933.2 4-1164.8, 8-1300	42.0	57.4
260	562.7	4*-8, 3*-21.4, 4-214.1, 2-306.9, 4-509.9 2-808.3, 8-1300	39.0	54.5

Exhibit 14 - Table III
PROPOSED WNYG DISTANCE TO CONTOURS


(Page 4 of 5)

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distance to Contours</u>	
			0.50 mV/m (km)	0.25 mV/m (km)
265	568.5	4*-8, 3*-21.4, 4-149.8, 2-293.7, 4-361.8 2-397.2, 4-635.6, 8-1299.3, 15-1300	39.2	54.7
270	573.0	4*-8, 3*-21.4, 4-122.2, 2-292.1, 4-339.9 2-424.4, 4-558.5, 8-738.2, 15-1029.3, 8-1213.5 15-1300	39.4	54.9
275	576.2	4*-8, 3*-21.4, 4-107.3, 2-459.8, 4-501.7 8-725.9, 15-793, 8-901.3, 15-938.1, 8-1164.9 15-1261.3, 8-1300	39.5	55.1
280	578.4	4-26.6, 2-29.4, 4-98.1, 2-480.3, 8-715.4 15-729.3, 8-738, 15-783, 8-951.1, 2-1030.8 8-1119.9, 15-1153.8, 8-1300	41.9	57.6
285	579.9	4-17.7, 2-45.9, 4-91, 2-142, 4-171.4 2-474.8, 8-641.2, 10-701.1, 20-755.6, 8-839.3 4-900, 2-1016.6, 8-1144.3, 15-1171.1, 8-1300	37.0	50.2
290	580.8	4-16.2, 2-60.9, 4-84.9, 2-125.9, 4-510.9 8-513.3, 4-515.9, 8-561.6, 10-647.6, 20-719.5 15-728.3, 20-735.7, 15-767.3, 8-991.4, 2-1040.2 8-1158.3, 15-1195, 8-1296.2, 4-1300	36.7	48.9
295	581.3	4-15.3, 2-114.5, 4-452.5, 8-501.5, 10-554.4 4-601.9, 20-701.9, 10-722, 8-738.1, 15-810.2 8-991, 2-1066.9, 8-1269.1, 4-1300	36.5	48.7
300	581.3	4-14.5, 2-105.7, 4-436.5, 8-471.5, 10-503.6 20-564.2, 4-614.6, 6-692.9, 10-733.2, 8-780.2 15-809.7, 8-1229.8, 4-1300	36.3	48.5
305	581.0	4-14, 2-99.1, 4-423.9, 8-473.4, 20-501.8 15-540.8, 10-561.5, 4-614.7, 6-718.2, 10-776.4 8-1211.9, 4-1300	36.1	48.4
310	580.1	4-13.6, 2-95, 4-363, 8-499, 15-529.6 6-572.9, 4-725, 10-892, 8-1300	36.0	48.2
315	578.8	4-13.6, 2-91.8, 4-381.6, 8-464.5, 15-510.1 6-593.7, 4-641.3, 10-814.6, 4-826.6, 10-830.5 4-858.6, 10-902.2, 2-1105.3, 8-1300	36.0	48.2
320	576.7	4-14.1, 2-89.5, 4-380.1, 8-425, 15-480.6 6-597.4, 1-710.6, 2-1300	36.0	48.2
325	573.7	4-14.7, 2-88, 4-357.7, 8-396.4, 15-442.6 4-542.8, 6-547.5, 1-697.8, 2-1271.6, 6-1300	36.1	48.3
330	569.5	4-15.4, 2-87.1, 4-360.1, 8-393.4, 15-429.7 4-433.6, 15-434.7, 10-442.3, 15-442.9, 10-447.1 15-448.8, 4-525.3, 1-696.3, 2-1041.5, 6-1233.8 2-1300	36.2	48.3
335	564.0	4-16.4, 2-86.9, 4-378.8, 8-383.4, 4-389.1 8-414.6, 15-432.5, 10-456.2, 4-514.5, 1-686.5 2-969.7, 6-1143.5, 2-1300	36.3	48.4


Exhibit 14 - Table III
PROPOSED WNYG DISTANCE TO CONTOURS
 (Page 5 of 5)

Azimuth (deg)	Field at 1 km (mV/m)	Ground Conductivity Data Region Conductivity Data in mS/m followed by distance in km to end of Region: * Indicates Measurement Data	<u>Distance to Contours</u>	
			0.50 mV/m (km)	0.25 mV/m (km)
340	556.7	4-18.4, 2-86.7, 4-428.2, 15-430.5, 10-462.1 4-632.2, 2-932.5, 6-1037.5, 2-1268.4, 5000-1277.2 2-1300	36.6	48.6
345	547.6	4-22.1, 2-85.2, 4-444.4, 10-491.7, 4-592.5 2-901.2, 6-959.3, 2-1098.4, 2-1243.8, 5000-1300	37.2	49.2
350	536.3	4-27.7, 2-78.3, 4-468.5, 10-543.5, 4-572.6 2-793.6, 2-1300	38.2	50.1
355	522.7	4-36.3, 2-69.1, 4-478.8, 10-549, 4-568.8 2-755.1, 2-1300	39.8	51.5

KILOMETERS FROM ANTENNA

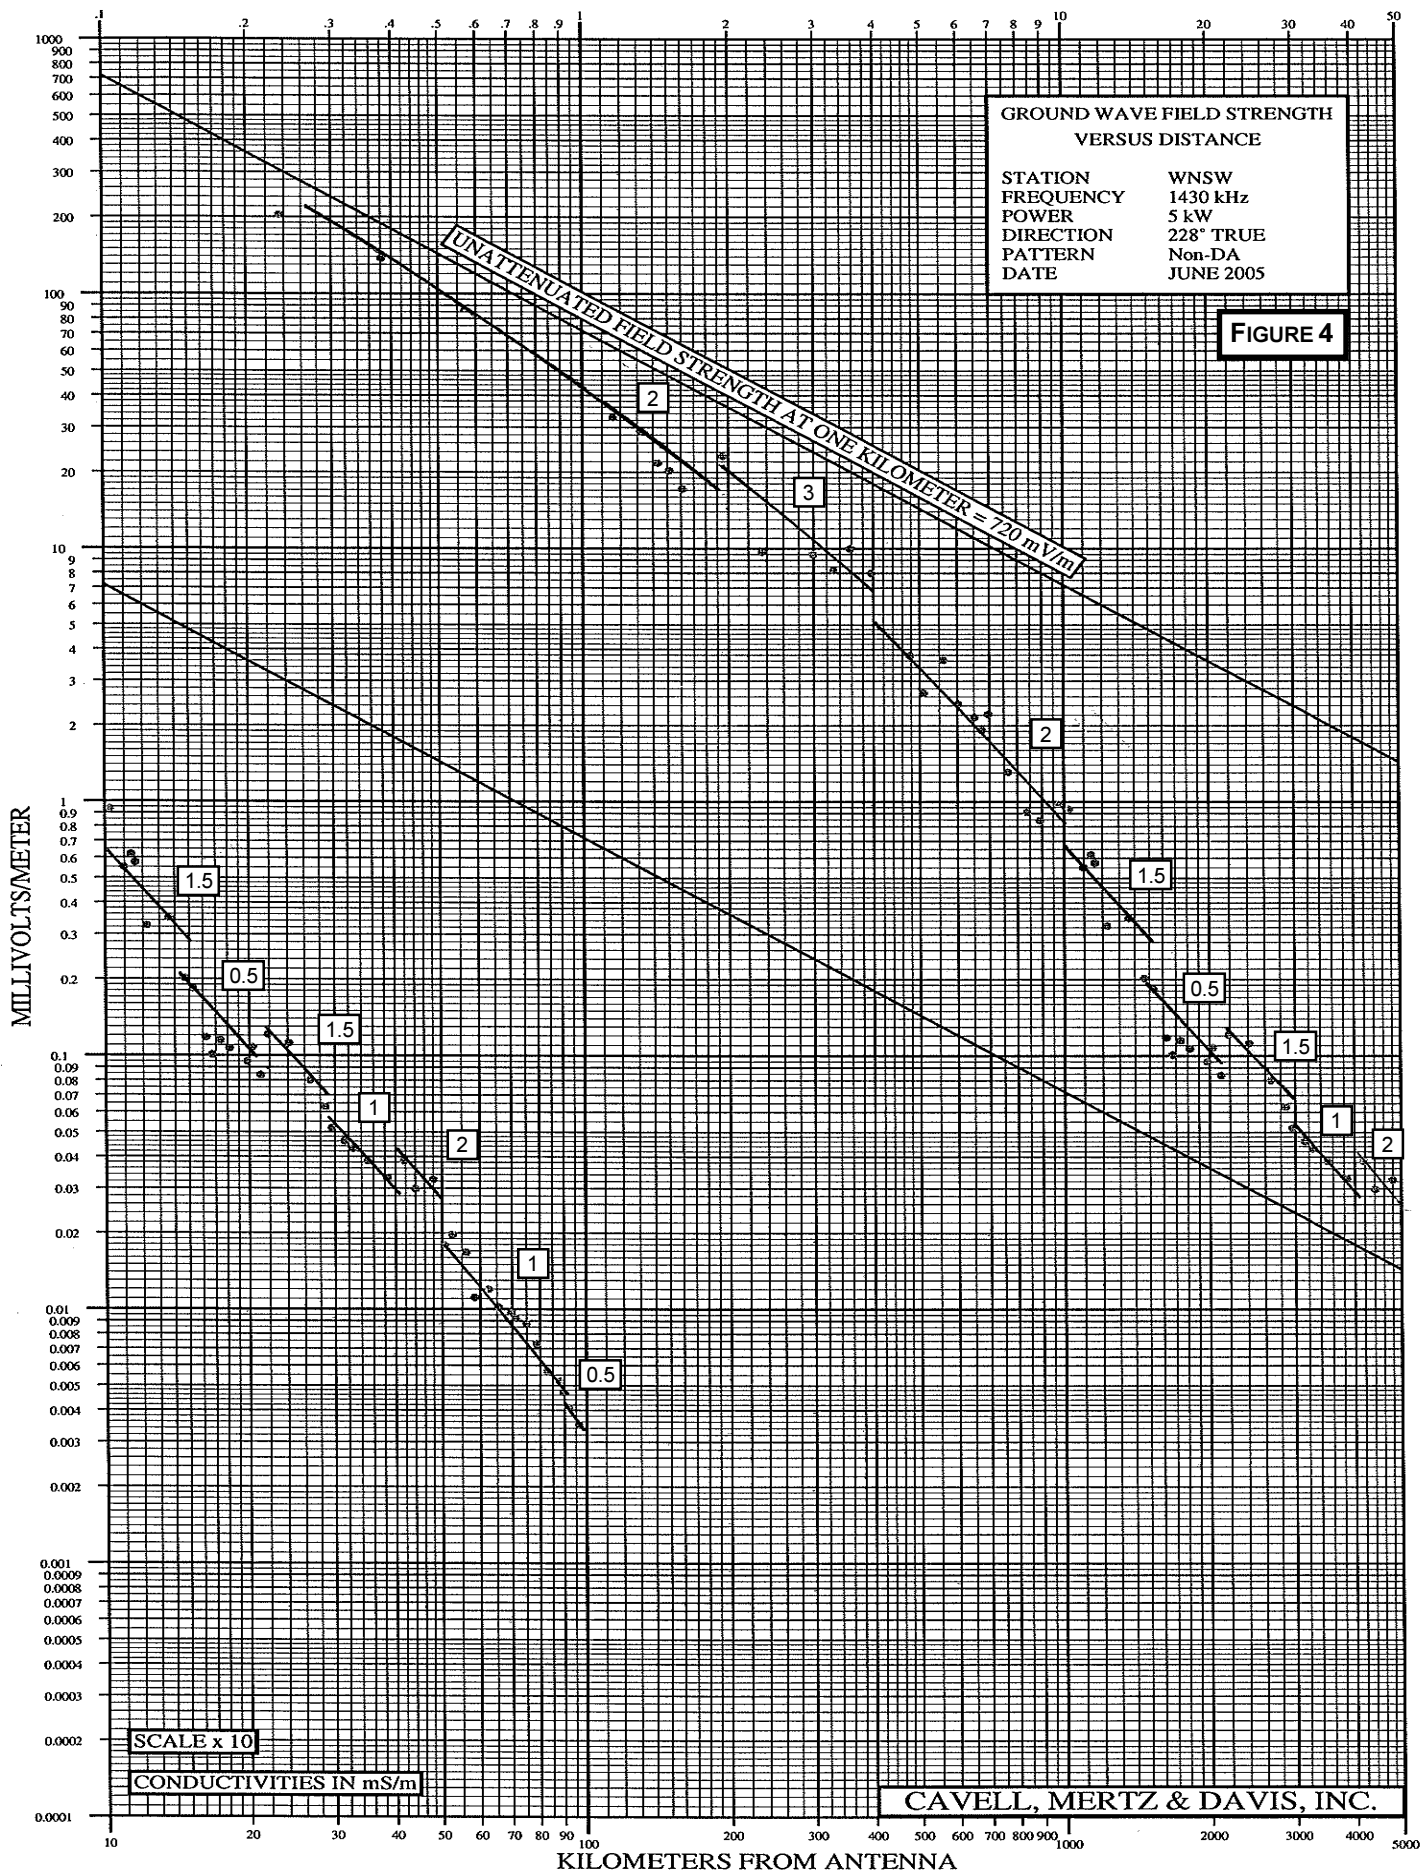


KILOMETERS FROM ANTENNA

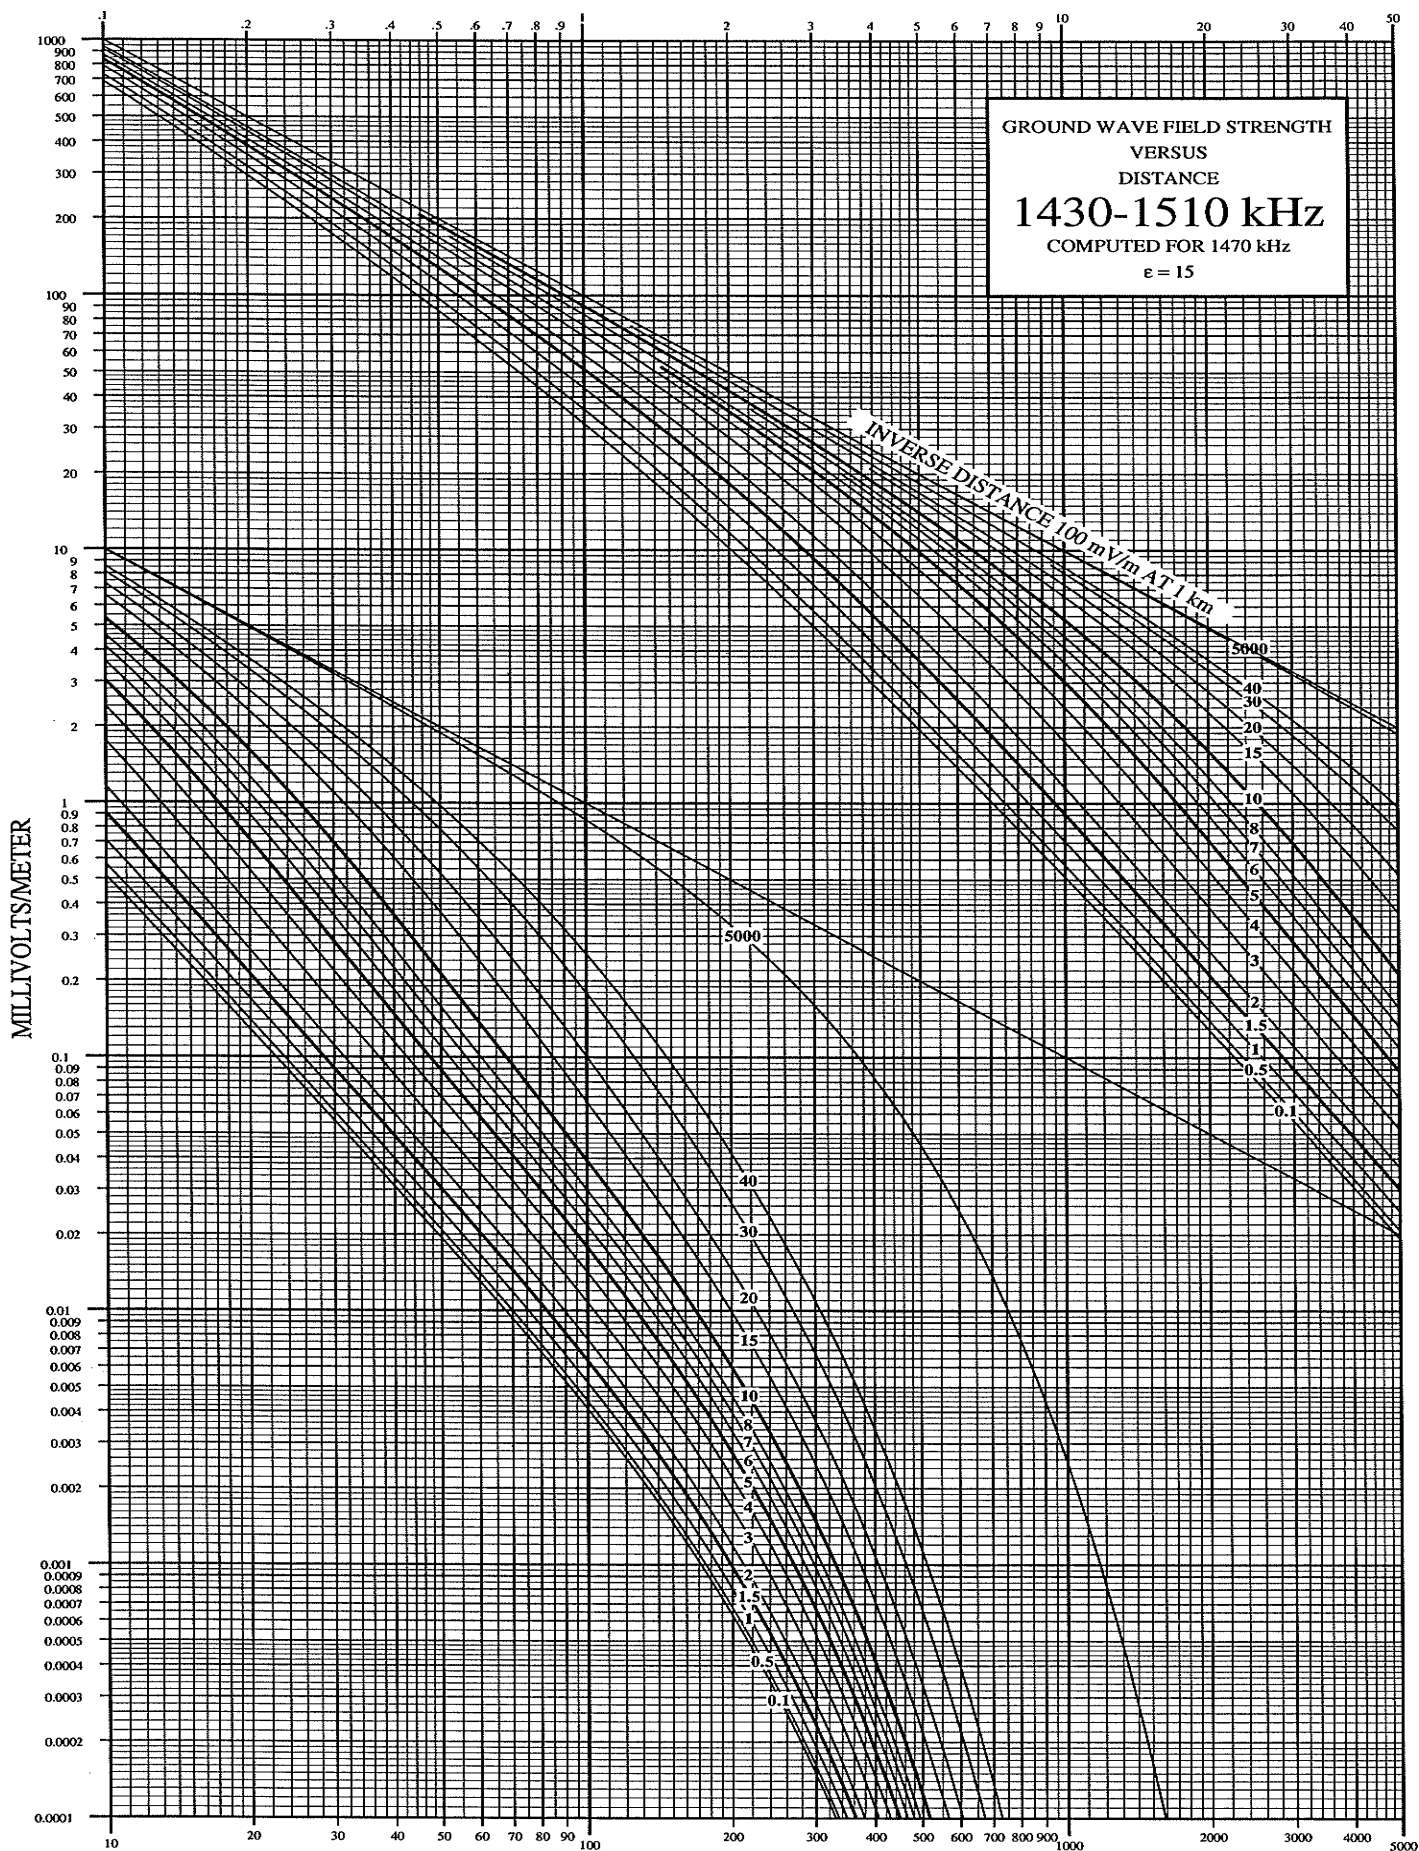


KILOMETERS FROM ANTENNA

GRAPH 18


KILOMETERS FROM ANTENNA

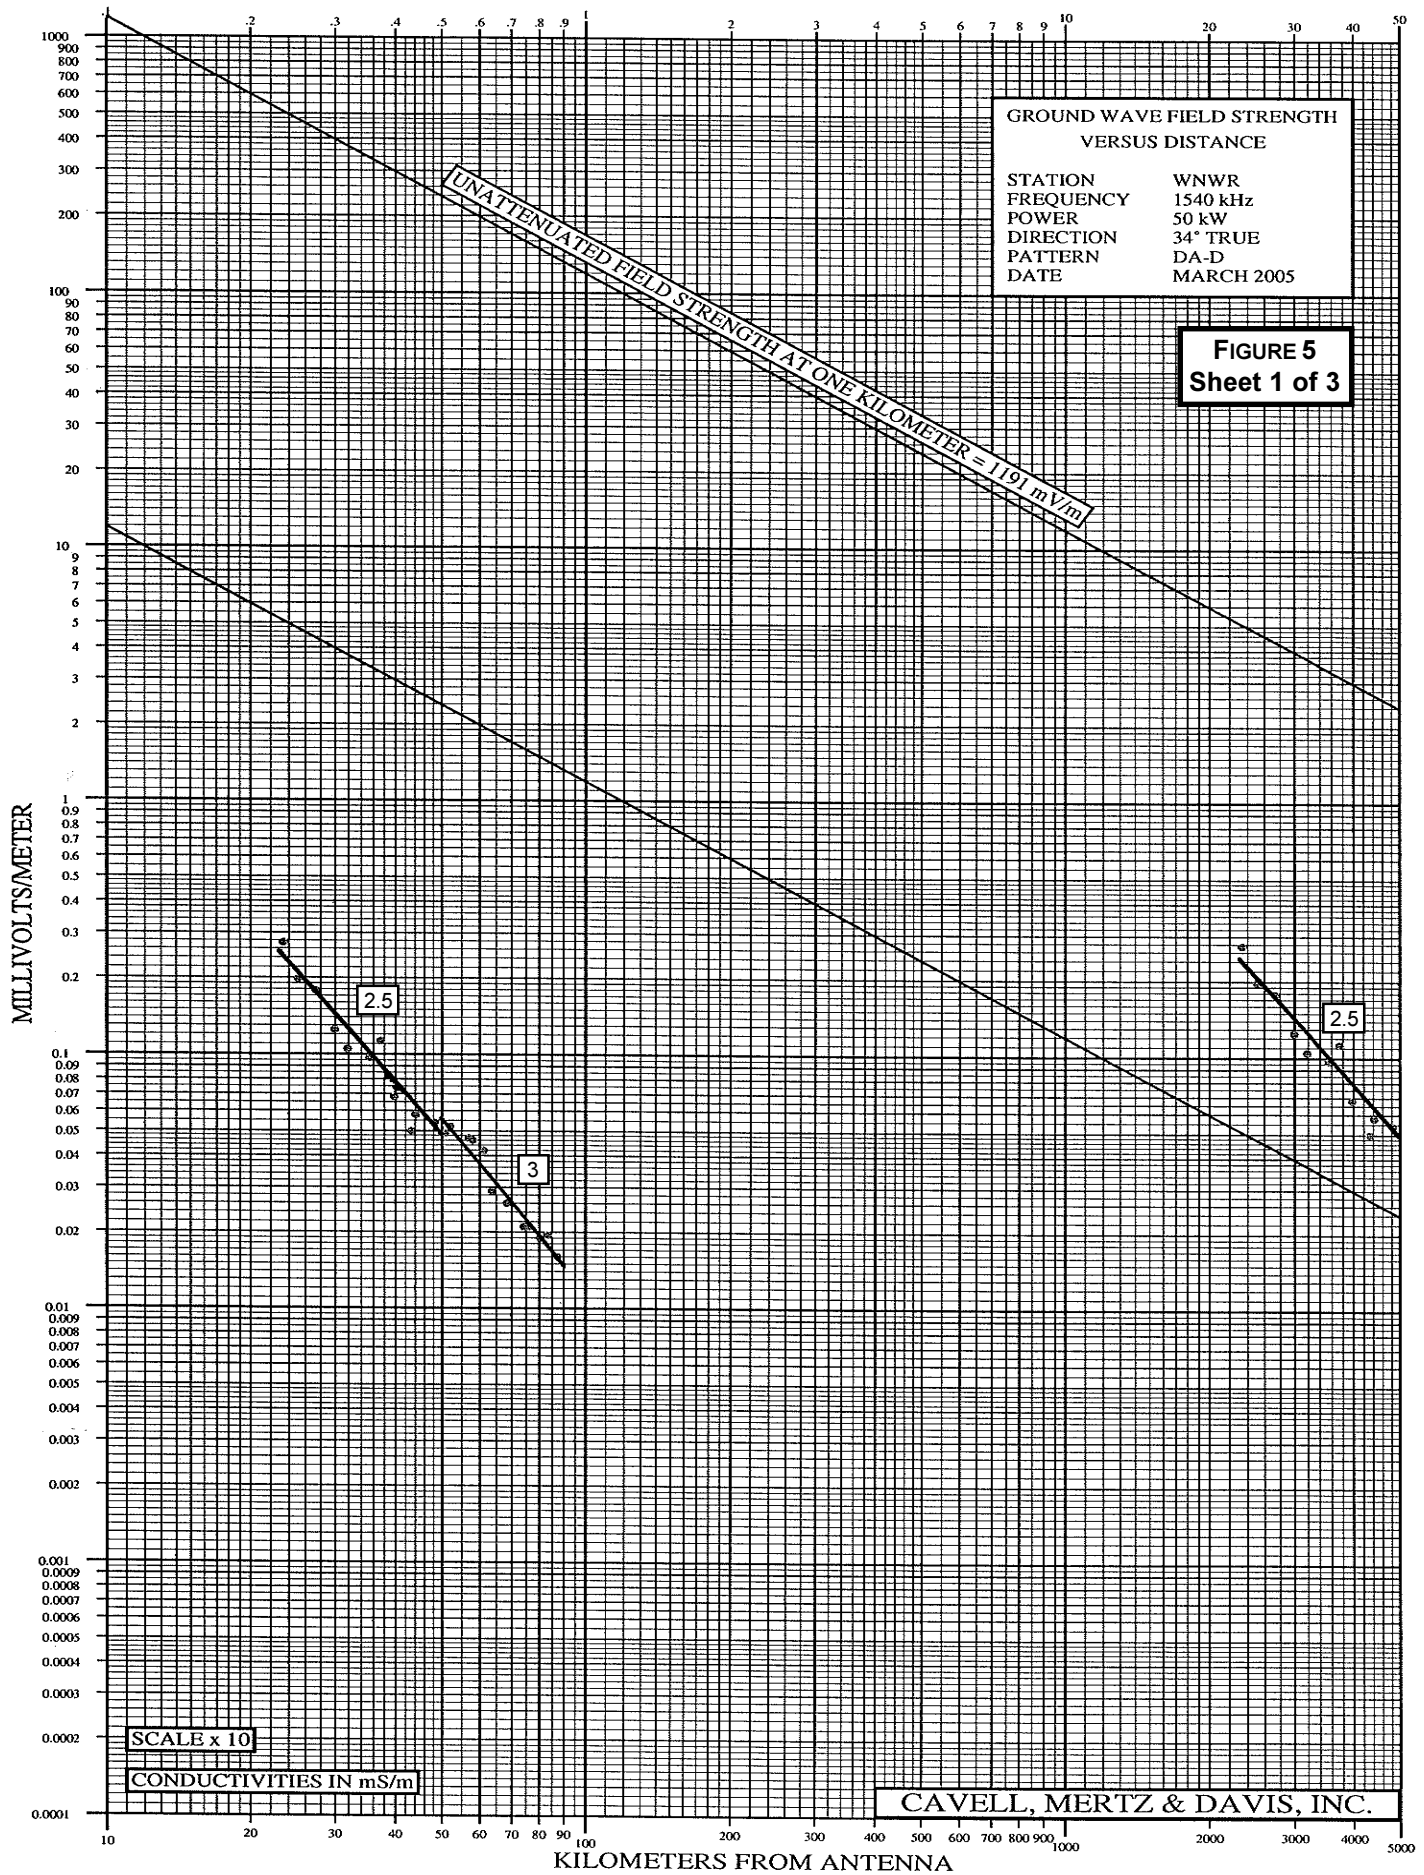


KILOMETERS FROM ANTENNA

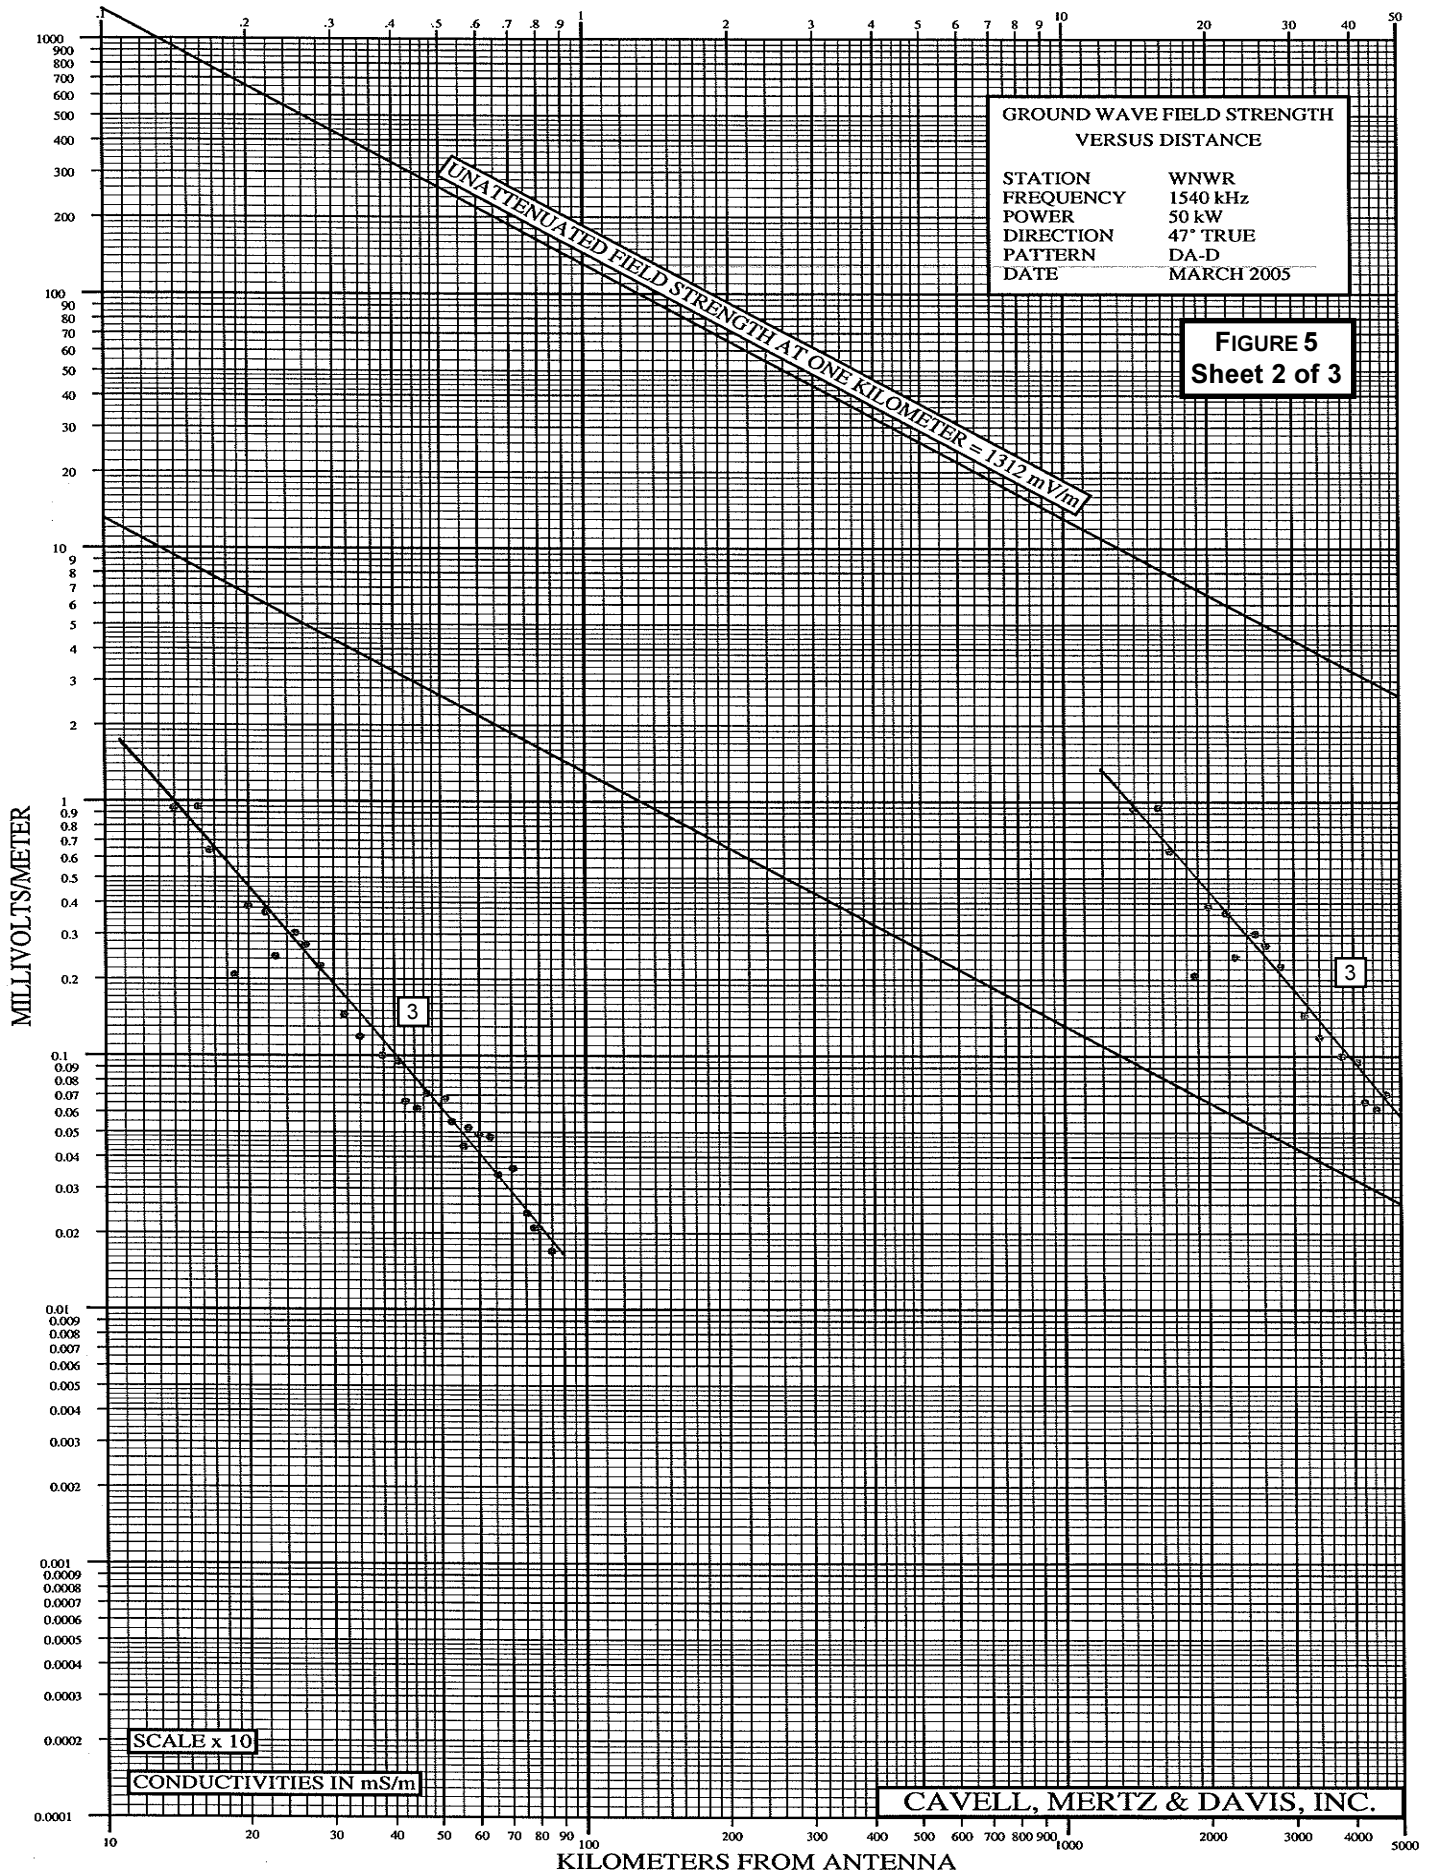

KILOMETERS FROM ANTENNA

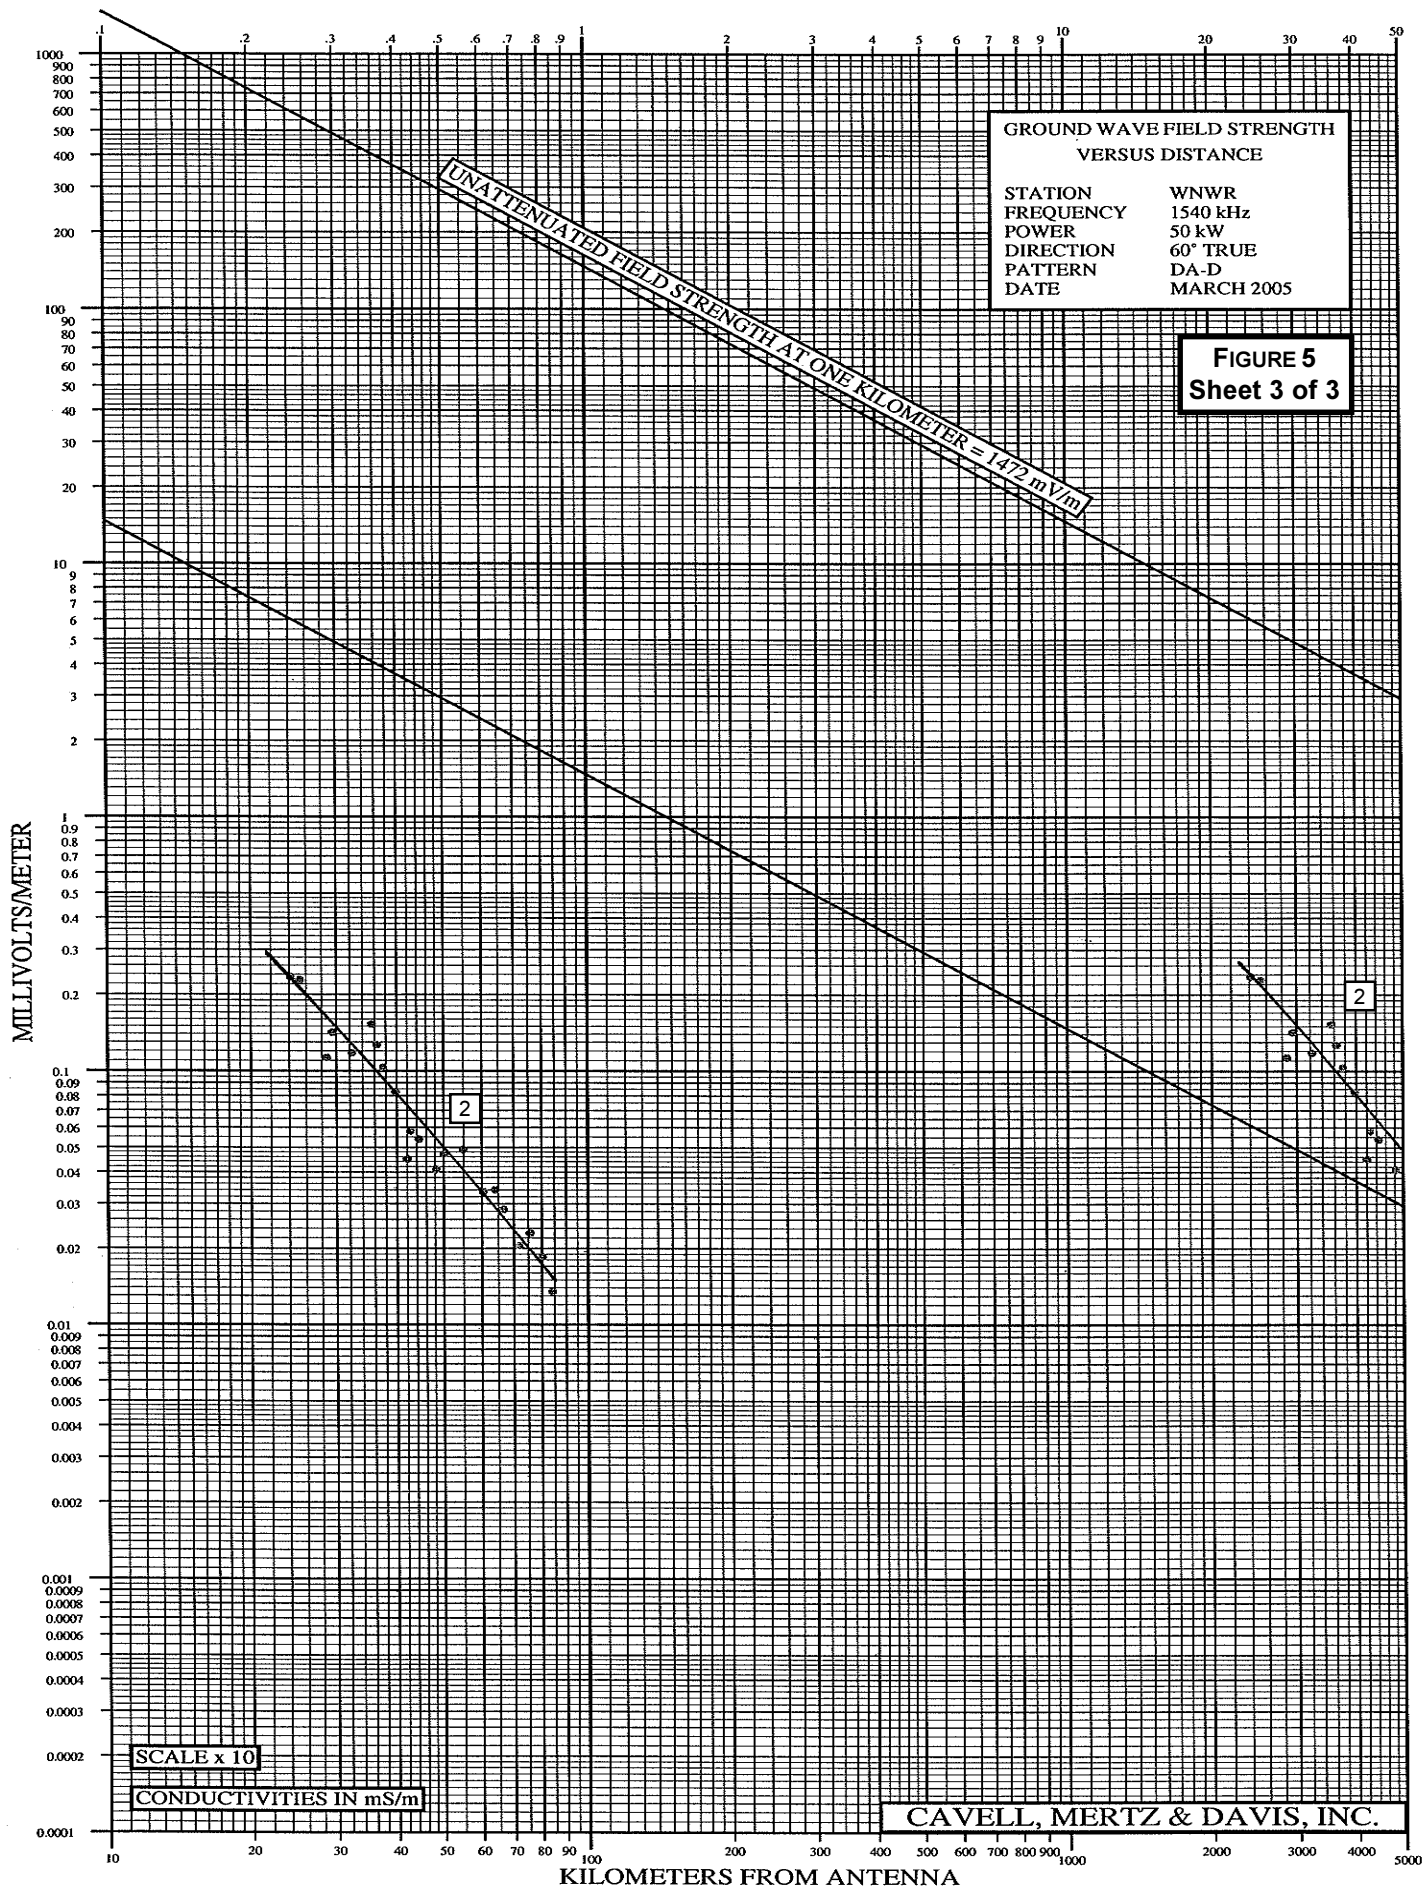

KILOMETERS FROM ANTENNA

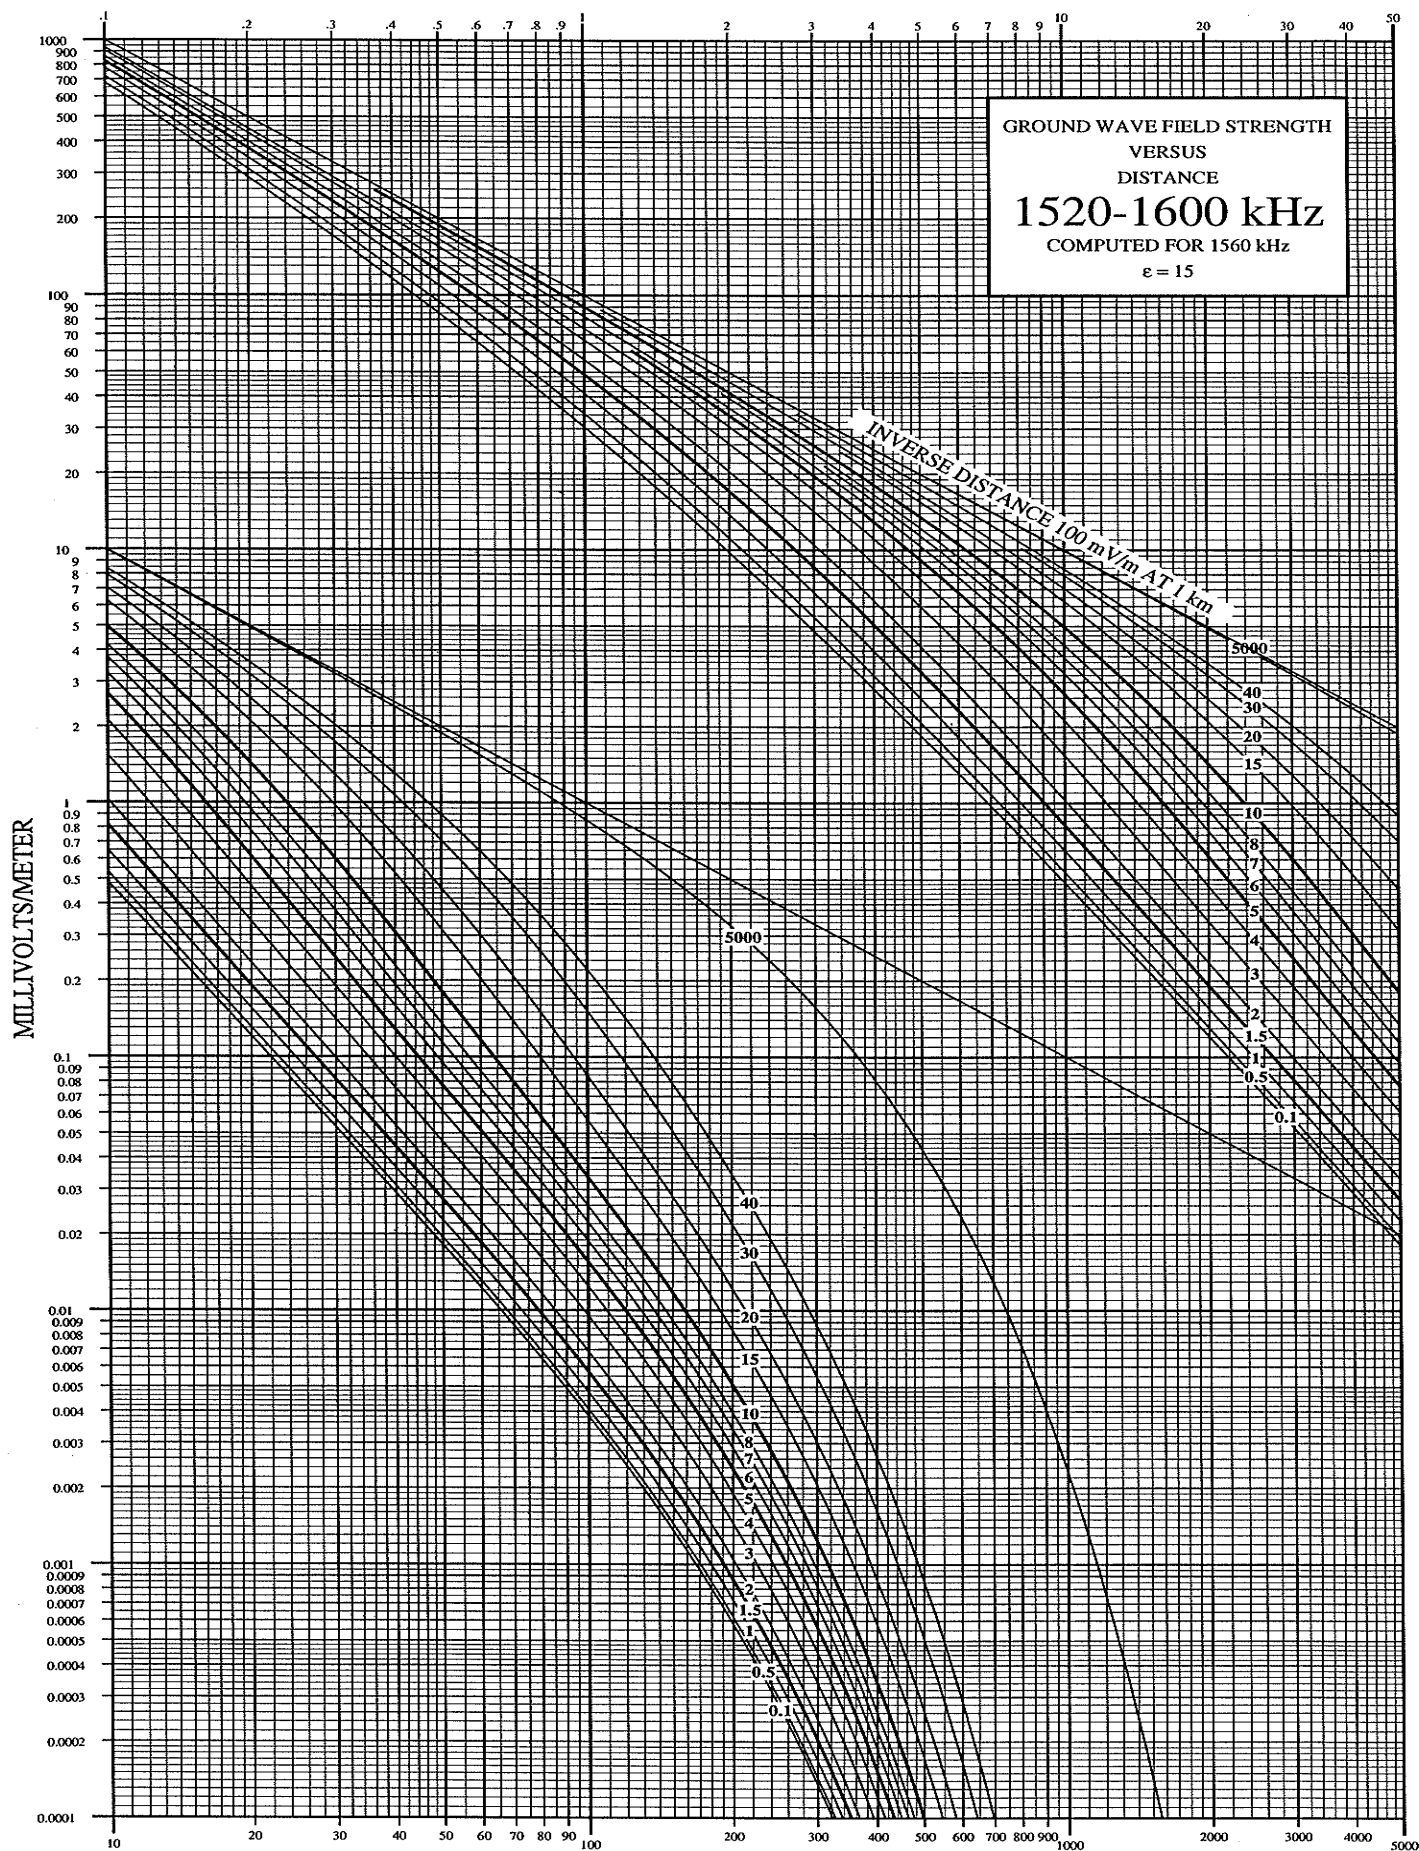

KILOMETERS FROM ANTENNA

GRAPH 19