


Engineering Exhibits for KDGE Aux. Antenna

Contour map showing licensed main 60 dBu and proposed Aux 60 dBu Contours

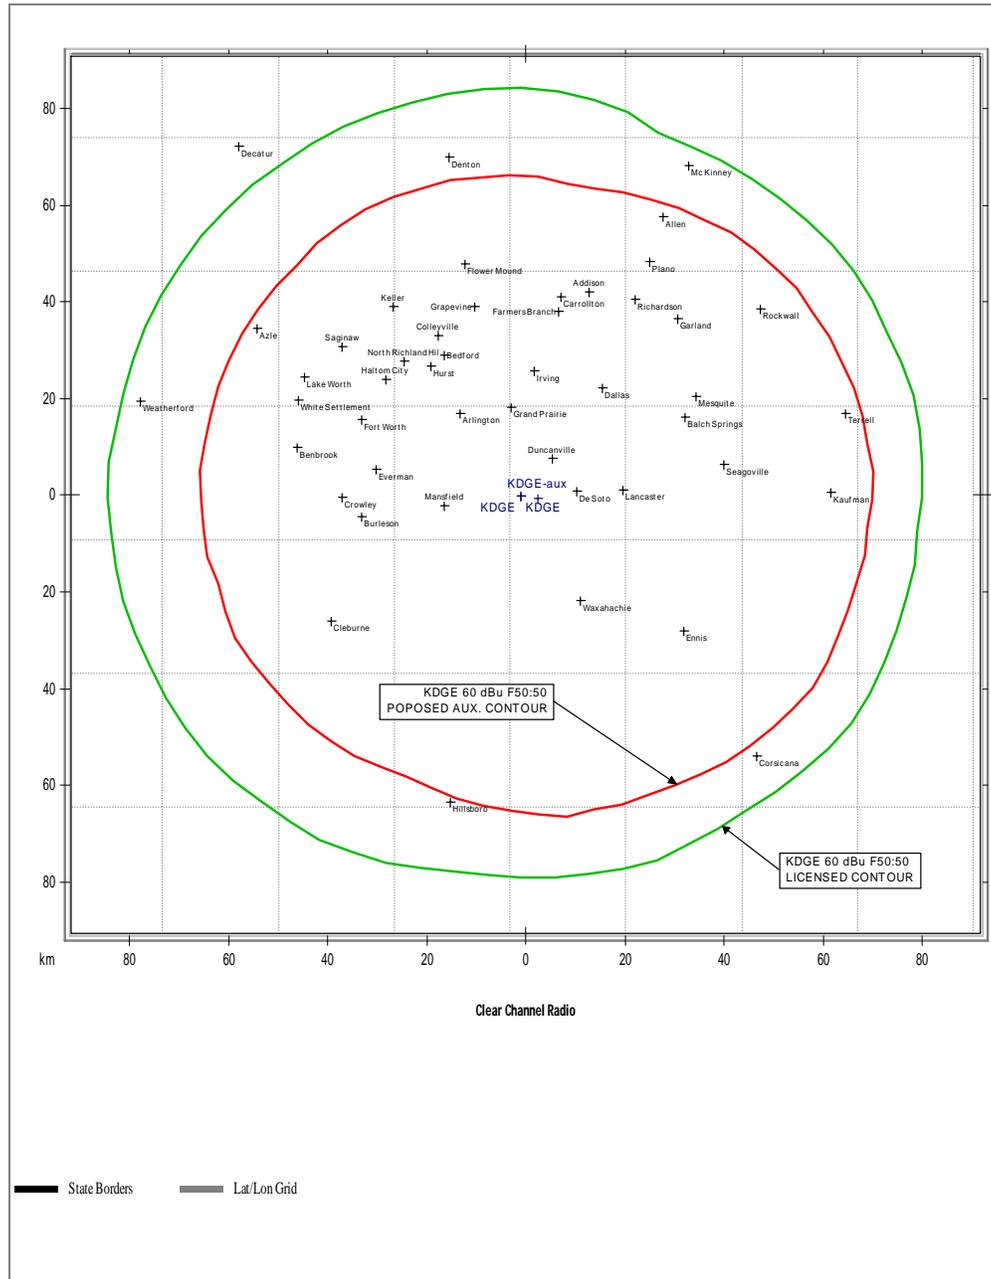

Radio Frequency Radiation Study and Statement

The Proposed facilities were evaluated in terms of potential radio frequency radiation exposure at ground level in accordance with OET Bulletin No. 65, "Evaluating Compliance With FCC-Specified Guidelines for Human Exposure to Radio frequency Radiation."

The proposed KDGE(FM) auxilliary antenna system is a Shively 6810 full-wave spaced EPA type 6 style antenna, mounted with its center of radiation 189 meters above ground level, and will operate with an effective radiated power of 98 kilowatts in both the horizontal and vertical planes. At 2 meters, the height of an average person, at a distance of 2 meters from the base of the tower, this proposal will contribute worst case, 0.956 microwatts per square centimeter, or 0.0956 percent of the allowable ANSI limit for controlled exposure, and 0.478 percent of the allowable limit for uncontrolled exposure. At the tower base, power density is even lower. It is therefore believed that this proposal is in compliance with OET Bulletin Number 65 as required by the Federal Communications Commission.

Further, the applicant will see that warning signs are posted in the vicinity of the tower, warning of potential radio frequency hazards at the site. The site itself is restricted from public access. The applicant will cooperate with other users of the tower to reduce power of the facility, or discontinue operation, as necessary to limit human exposure to levels less than specified by the Federal Communications Commission should anyone be required to climb the tower for maintenance or inspection.