

***Directional Antenna System  
for  
WXEG, Beavercreek, Ohio***

March 22, 2002

Electronics Research Inc. is providing a custom fabricated antenna system that is specially designed to meet the FCC requirements and the general needs of radio station WXEG.

The antenna is the ERI model 1083-1CP-DA configuration. The circular polarized system consists of one level using three driven circular polarized radiating element attached to three flat panels. The antenna will mount on the triangular tower at an orientation of North 28° 24' 10" East. The antenna was tested on a 7' face ERI tower, which is the structure the station plans to use to support the array. All tests were performed on a frequency of 103.9 megahertz which is the center of the FM broadcast channel assigned to WXEG.

Pattern measurements were made on a sixty-acre antenna pattern range that is owned and operated by Electronics Research, Inc. The tests were performed under the direction of Thomas B. Silliman, president of Electronics Research, Inc. Mr. Silliman has the Bachelor of Electrical Engineering and the Master of Electrical Engineering degrees from Cornell University and is a registered professional engineer in the states of Indiana, Maryland and Minnesota.

# Directional Antenna System For WXEG, Beavercreek, Ohio

(Continued)


## DESCRIPTION OF THE TEST PROCEDURE

The test antenna consisted of the complete circular polarized system. The elements and brackets that were used in this test are electrically equivalent to those that will be supplied with the antenna.

The power distribution and phase relationship to the antenna elements was adjusted in order to achieve the directional radiation patterns for both horizontal and vertical polarization components.

The proof-of-performance was accomplished using a 7' face ERI tower with identical dimension and configuration including all braces, ladders, conduits, coaxial lines and other appurtenances that are included in the actual aperture at which the antenna will be installed. The structure was erected vertically on a turntable mounted on a non-metallic building with the antenna centered vertically on the structure, making the center of radiation of the test approximately 30 feet above ground. The turntable is equipped with a motor drive and azimuth indicating mechanism, resolution of this azimuth measuring device is one-tenth of a degree.

The antenna under test was operated in the transmitting mode and fed from a Wavetek Model 3000 signal generator. The frequency of the signal source was set at 103.9 MHz and was constantly monitored by an Anritsu Model ML521B measuring receiver.

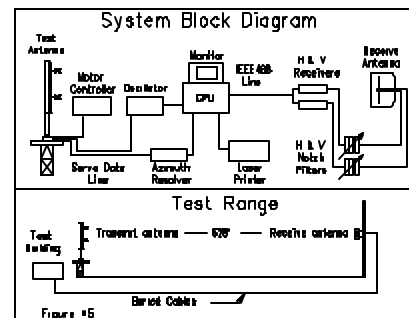

A broad-band horizontal and vertical dipole system, located approximately 628 feet from the test antenna, was used to receive the emitted test signals. The dipole system was mounted at the same height above terrain as the center of the antenna under test. The signals received by the dipole system were fed to the test building by way of two buried Heliacx cables to an Anritsu Model ML521B measuring receiver. This data was interfaced to a Hewlett-Packard Laser Jet 4P printer by means of a Pentium computer system. Relative field strength was plotted as a function of azimuth.

# Directional Antenna System For WXEG, Beavercreek, Ohio

(Continued)

The measurements were performed by rotating the test antenna in a counter-clockwise direction and plotting the received signal on polar co-ordinated graph paper in a clockwise direction. Both horizontal and vertical components were recorded separately.

## CONCLUSIONS

The power distribution and phase relationship will be fixed when antenna is manufactured. Proper maintenance of the elements should be all that is required to maintain the pattern in adjustment.

The 1083-1CP-DA array is to be mounted on the 7' face ERI tower at a bearing of North 28° 24' 10" East. Blue prints provided with the antenna will show the proper antenna orientation alignment. The antenna alignment procedure should be directed by a licensed surveyor as prescribed by the FCC.

Figure #1 represents the maximum value of either the horizontal or vertical component at any azimuth. The measured horizontal plane relative field pattern, for both the horizontal and vertical polarization components, is shown on Figure #2 attached. The actual measured pattern does not exceed the authorized FCC composite pattern at any azimuth. A calculated vertical plane relative field pattern is shown on Figure #3 attached. The power in the maximum will reach 2.9 kilowatts (4.624 dBk).

The power at North 200-280 degrees East does not exceed 1.45 kilowatts (1.614 dBk).

The power at North 290 degrees East does not exceed 1.409 kilowatts (1.489 dBk).

The power at North 300-310 degrees East does not exceed 1.349 kilowatts (1.3 dBk).

The RMS of the vertically polarized horizontal plane component does not exceed the RMS of the horizontally polarized horizontal plane component.

The composite horizontal and vertical maximum relative field pattern obtained from the measured data as shown on Figure #1 has an RMS that is greater than 85% of the filed composite pattern.


The clear vertical length of the structure required to support the antenna is 20 feet.

Directional Antenna System  
For  
WXEG, Beavercreek, Ohio

(Continued)

The directional antenna should not be mounted on the top of an antenna tower that includes a top-mounted platform larger than the cross-sectional area of the tower in the horizontal plane. No obstructions other than those that are specified by the blue prints supplied with the antenna are to be mounted within 75 ft. horizontally of the system.

The vertical distance to the nearest obstruction should be a minimum of 10 ft. from the directional antenna. Metallic guy wires should be a minimum distance of forty feet horizontally from the antenna.

A handwritten signature in cursive script, appearing to read "Tom Scharf".

Tom Scharf


ELECTRONICS RESEARCH, INC.

# **ERI**® *Horizontal Plane Relative Field Pattern*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

FIGURE: 1  
STATION: WXEG  
LOCATION: BEAVERCREEK, OH  
ANTENNA TYPE: 1083-1CP-DA  
STRUCTURE: 7' FACE ERI TOWER

DATE: 3/22/02  
FREQUENCY: 103.9 MHz  
ORIENTATION: 28° 24' 10" TRUE  
MOUNTING: CUSTOM

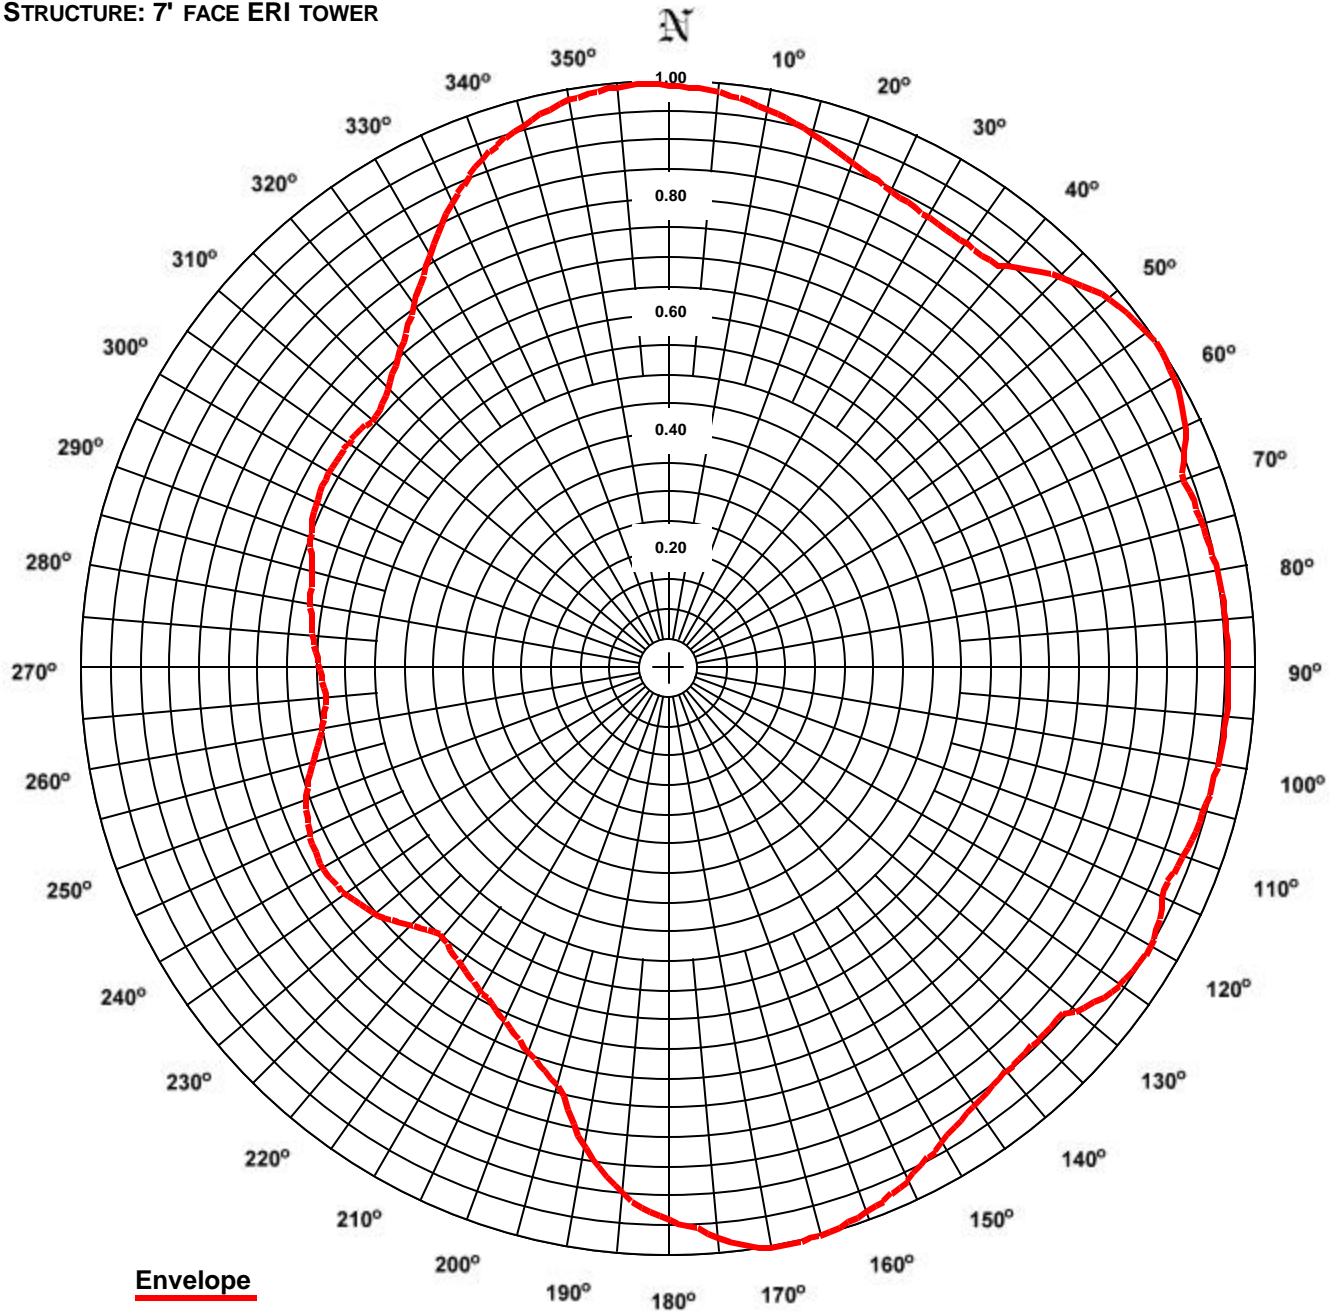

RMS: 0.844  
Maximum: 1.000 @ 57° True  
Minimum: 0.587 @ 265° True

COMMENTS: COMPOSITE PATTERN: THIS PATTERN SHOWS THE MAXIMUM OF EITHER THE H OR V AZIMUTH VALUES. THIS PATTERN DOES NOT EXCEED THE FCC FILED COMPOSITE PATTERN AT ANY AZIMUTH. THE RMS OF THIS PATTERN IS GREATER THAN 85% OF THE FILED FCC COMPOSITE PATTERN BPH-20000602AIA

# ERI<sup>®</sup> *Horizontal Plane Relative Field List*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

**Station: WXEG**  
**Location: Beavercreek, OH**  
**Frequency: 103.9 MHz**

**Antenna: 1083-1CP-DA**  
**Orientation: 28° 24' 10" True**  
**Tower: 7' face ERI tower**

**Figure: 1**  
**Date: 3/22/02**  
**Reference: wxeg2m.fig**

Angle	Envelope			Polarization	Angle	Envelope			Polarization
	Field	kW	dBk			Field	kW	dBk	
0°	0.998	2.89	4.61	Horizontal	180°	0.937	2.55	4.06	Vertical
5°	0.989	2.83	4.52	Horizontal	185°	0.896	2.33	3.67	Vertical
10°	0.971	2.74	4.37	Horizontal	190°	0.825	1.98	2.96	Vertical
15°	0.946	2.60	4.14	Horizontal	195°	0.734	1.56	1.94	Horizontal
20°	0.919	2.45	3.89	Horizontal	200°	0.694	1.40	1.45	Horizontal
25°	0.900	2.35	3.71	Horizontal	205°	0.661	1.27	1.03	Horizontal
30°	0.889	2.29	3.60	Horizontal	210°	0.635	1.17	0.69	Horizontal
35°	0.886	2.28	3.57	Horizontal	215°	0.615	1.10	0.40	Horizontal
40°	0.898	2.34	3.69	Vertical	220°	0.598	1.04	0.16	Horizontal
45°	0.948	2.61	4.16	Vertical	225°	0.617	1.10	0.42	Vertical
50°	0.981	2.79	4.46	Vertical	230°	0.648	1.22	0.86	Vertical
55°	0.998	2.89	4.61	Vertical	235°	0.669	1.30	1.14	Vertical
60°	0.995	2.87	4.58	Vertical	240°	0.679	1.34	1.26	Vertical
65°	0.970	2.73	4.36	Vertical	245°	0.674	1.32	1.20	Vertical
70°	0.935	2.54	4.04	Horizontal	250°	0.658	1.26	0.99	Vertical
75°	0.943	2.58	4.11	Horizontal	255°	0.631	1.15	0.62	Vertical
80°	0.949	2.61	4.17	Horizontal	260°	0.603	1.05	0.23	Vertical
85°	0.952	2.63	4.20	Horizontal	265°	0.587	1.00	-0.01	Vertical
90°	0.954	2.64	4.21	Horizontal	270°	0.596	1.03	0.12	Horizontal
95°	0.953	2.63	4.20	Horizontal	275°	0.609	1.07	0.31	Horizontal
100°	0.949	2.61	4.17	Horizontal	280°	0.621	1.12	0.48	Horizontal
105°	0.941	2.57	4.10	Horizontal	285°	0.630	1.15	0.61	Horizontal
110°	0.931	2.52	4.01	Horizontal	290°	0.650	1.23	0.88	Vertical
115°	0.928	2.50	3.98	Vertical	295°	0.665	1.28	1.08	Vertical
120°	0.945	2.59	4.13	Vertical	300°	0.672	1.31	1.17	Vertical
125°	0.936	2.54	4.05	Vertical	305°	0.670	1.30	1.14	Vertical
130°	0.903	2.37	3.74	Vertical	310°	0.661	1.27	1.03	Vertical
135°	0.891	2.30	3.62	Horizontal	315°	0.679	1.34	1.26	Horizontal
140°	0.895	2.32	3.66	Horizontal	320°	0.713	1.47	1.68	Horizontal
145°	0.908	2.39	3.79	Horizontal	325°	0.759	1.67	2.23	Horizontal
150°	0.931	2.51	4.00	Horizontal	330°	0.817	1.94	2.87	Horizontal
155°	0.960	2.67	4.27	Horizontal	335°	0.877	2.23	3.49	Horizontal
160°	0.983	2.80	4.48	Horizontal	340°	0.926	2.49	3.96	Horizontal
165°	0.996	2.88	4.59	Horizontal	345°	0.962	2.69	4.29	Horizontal
170°	0.999	2.89	4.61	Horizontal	350°	0.986	2.82	4.51	Horizontal
175°	0.971	2.74	4.37	Horizontal	355°	0.999	2.89	4.61	Horizontal

**Polarization:**  
**Maximum Field:**  
**Minimum Field:**  
**RMS:**  
**Maximum ERP:**  
**Maximum Power Gain:**

**Envelope**  
**1.000 @ 57° True**  
**0.587 @ 265° True**  
**0.844**  
**2.900 kW**  
**0.670 (-1.737 dB)**


**Total Input Power: 4.326 kW**

# **ERI**® *Horizontal Plane Relative Field Pattern*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

FIGURE NO: 2  
STATION: WXEG  
LOCATION: BEAVERCREEK, OH  
ANTENNA: 1083-1CP-DA  
STRUCTURE: 7' FACE ERI TOWER

DATE: 3/22/02  
FREQUENCY: 103.9 MHz  
ORIENTATION: 28° 24' 10" TRUE  
MOUNTING: CUSTOM  
BAYS TESTED: ONE

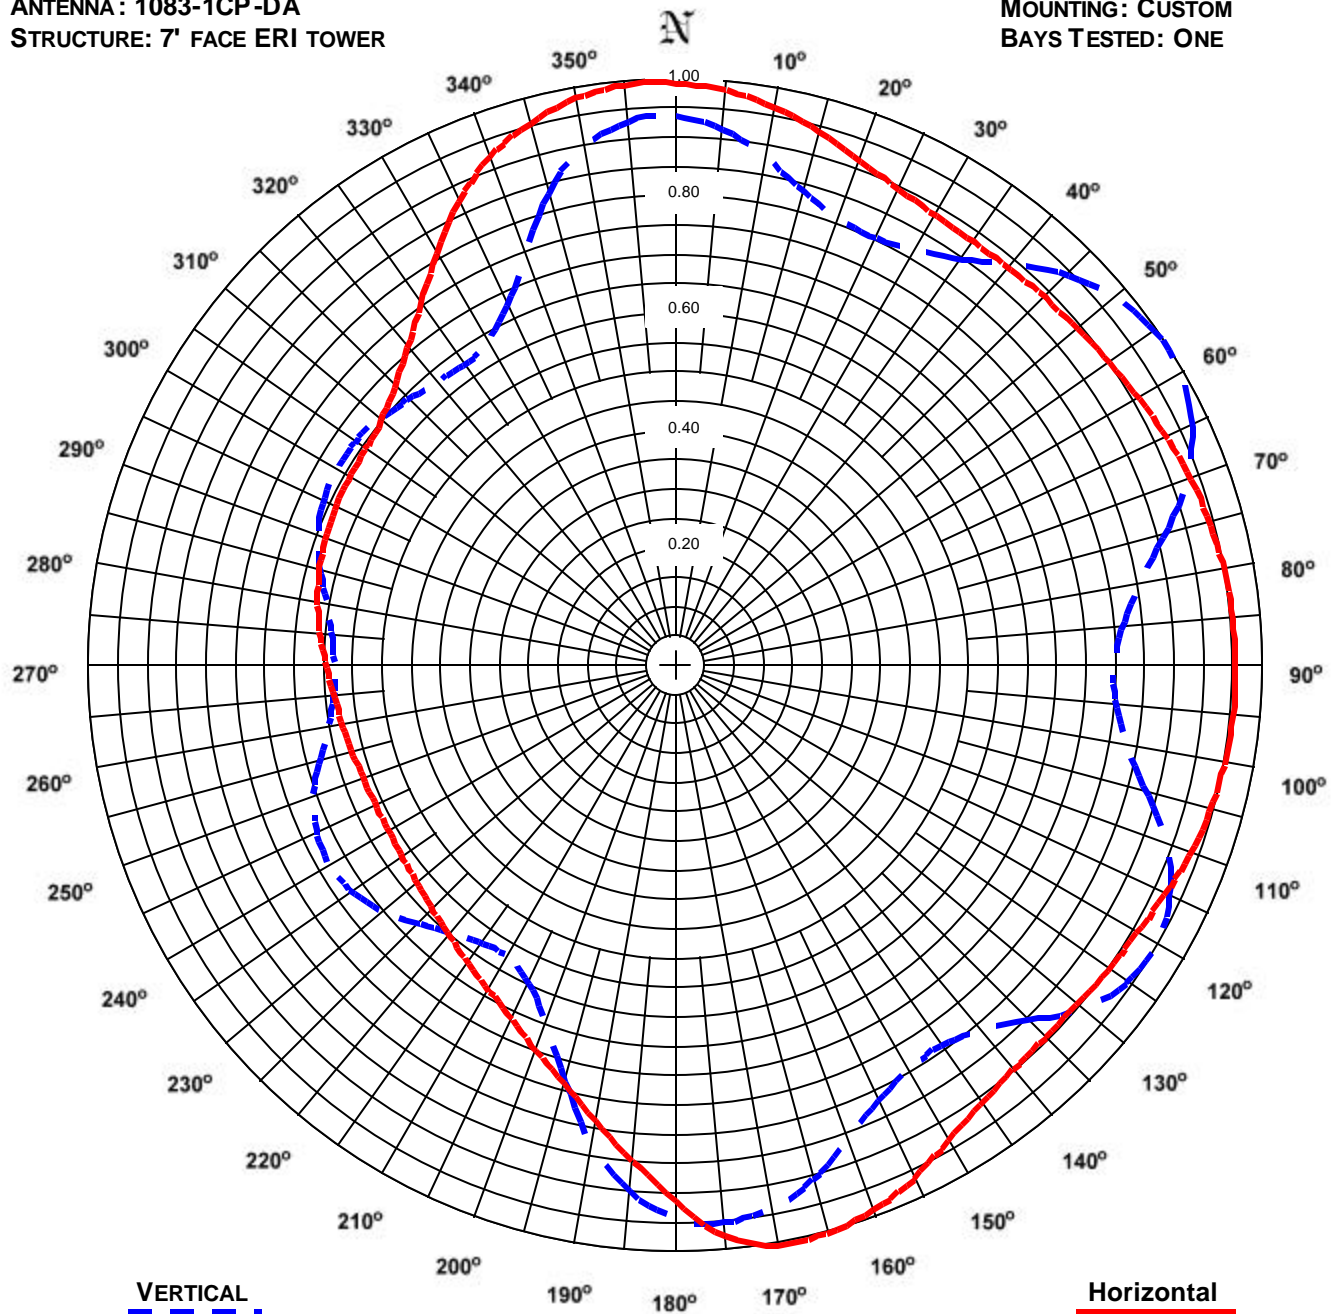

**VERTICAL**  
RMS: 0.788  
MAXIMUM: 1.000 @ 57° TRUE  
MINIMUM: 0.568 @ 211° TRUE

**Horizontal**  
RMS: 0.828  
MAXIMUM: 1.000 @ 169° True  
MINIMUM: 0.562 @ 243° True

COMMENTS: MEASURED PATTERN OF THE HORIZONTAL AND VERTICAL COMPONENTS.

# ERI<sup>®</sup> *Horizontal Plane Relative Field List*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

**Station: WXEG**

**Location: Beavercreek, OH**

**Frequency: 103.9 MHz**

**Antenna: 1083-1CP-DA**

**Orientation: 28° 24' 10" True**

**Tower: 7' face ERI tower**

**Figure: 2**

**Date: 3/22/02**

**Reference: wxeg2m.fig**

Angle	Horizontal			Vertical			Angle	Horizontal			Vertical		
	Field	kW	dBk	Field	kW	dBk		Field	kW	dBk	Field	kW	dBk
0°	0.998	2.89	4.61	0.941	2.57	4.09	180°	0.910	2.40	3.80	0.937	2.55	4.06
5°	0.989	2.83	4.52	0.922	2.47	3.92	185°	0.842	2.06	3.14	0.896	2.33	3.67
10°	0.971	2.74	4.37	0.885	2.27	3.56	190°	0.783	1.78	2.50	0.825	1.98	2.96
15°	0.946	2.60	4.14	0.841	2.05	3.12	195°	0.734	1.56	1.94	0.728	1.54	1.87
20°	0.919	2.45	3.89	0.815	1.93	2.85	200°	0.694	1.40	1.45	0.646	1.21	0.82
25°	0.900	2.35	3.71	0.809	1.90	2.78	205°	0.661	1.27	1.03	0.593	1.02	0.08
30°	0.889	2.29	3.60	0.822	1.96	2.92	210°	0.635	1.17	0.69	0.569	0.94	-0.27
35°	0.886	2.28	3.57	0.852	2.10	3.23	215°	0.615	1.10	0.40	0.573	0.95	-0.22
40°	0.888	2.29	3.59	0.898	2.34	3.69	220°	0.598	1.04	0.16	0.589	1.01	0.02
45°	0.891	2.30	3.62	0.948	2.61	4.16	225°	0.585	0.99	-0.04	0.617	1.10	0.42
50°	0.897	2.33	3.68	0.981	2.79	4.46	230°	0.574	0.96	-0.20	0.648	1.22	0.86
55°	0.905	2.37	3.75	0.998	2.89	4.61	235°	0.567	0.93	-0.30	0.669	1.30	1.14
60°	0.914	2.42	3.85	0.995	2.87	4.58	240°	0.563	0.92	-0.36	0.679	1.34	1.26
65°	0.926	2.48	3.95	0.970	2.73	4.36	245°	0.563	0.92	-0.37	0.674	1.32	1.20
70°	0.935	2.54	4.04	0.924	2.48	3.94	250°	0.565	0.92	-0.34	0.658	1.26	0.99
75°	0.943	2.58	4.11	0.858	2.14	3.30	255°	0.569	0.94	-0.27	0.631	1.15	0.62
80°	0.949	2.61	4.17	0.800	1.86	2.69	260°	0.576	0.96	-0.17	0.603	1.05	0.23
85°	0.952	2.63	4.20	0.763	1.69	2.27	265°	0.585	0.99	-0.04	0.587	1.00	-0.01
90°	0.954	2.64	4.21	0.746	1.61	2.08	270°	0.596	1.03	0.12	0.582	0.98	-0.07
95°	0.953	2.63	4.20	0.753	1.65	2.16	275°	0.609	1.07	0.31	0.589	1.01	0.03
100°	0.949	2.61	4.17	0.783	1.78	2.50	280°	0.621	1.12	0.48	0.604	1.06	0.24
105°	0.941	2.57	4.10	0.833	2.01	3.04	285°	0.630	1.15	0.61	0.627	1.14	0.57
110°	0.931	2.52	4.01	0.891	2.30	3.62	290°	0.638	1.18	0.72	0.650	1.23	0.88
115°	0.919	2.45	3.89	0.928	2.50	3.98	295°	0.643	1.20	0.79	0.665	1.28	1.08
120°	0.907	2.39	3.78	0.945	2.59	4.13	300°	0.646	1.21	0.83	0.672	1.31	1.17
125°	0.899	2.34	3.70	0.936	2.54	4.05	305°	0.647	1.22	0.85	0.670	1.30	1.14
130°	0.894	2.32	3.65	0.903	2.37	3.74	310°	0.657	1.25	0.98	0.661	1.27	1.03
135°	0.891	2.30	3.62	0.848	2.09	3.19	315°	0.679	1.34	1.26	0.647	1.21	0.84
140°	0.895	2.32	3.66	0.805	1.88	2.74	320°	0.713	1.47	1.68	0.636	1.17	0.69
145°	0.908	2.39	3.79	0.786	1.79	2.53	325°	0.759	1.67	2.23	0.631	1.16	0.63
150°	0.931	2.51	4.00	0.792	1.82	2.60	330°	0.817	1.94	2.87	0.642	1.20	0.78
155°	0.960	2.67	4.27	0.816	1.93	2.86	335°	0.877	2.23	3.49	0.683	1.35	1.31
160°	0.983	2.80	4.48	0.857	2.13	3.28	340°	0.926	2.49	3.96	0.751	1.64	2.14
165°	0.996	2.88	4.59	0.904	2.37	3.75	345°	0.962	2.69	4.29	0.839	2.04	3.10
170°	0.999	2.89	4.61	0.935	2.53	4.04	350°	0.986	2.82	4.51	0.902	2.36	3.73
175°	0.971	2.74	4.37	0.948	2.61	4.16	355°	0.999	2.89	4.61	0.936	2.54	4.05

**Polarization:**

**Maximum Field:**

**Minimum Field:**

**RMS:**

**Maximum ERP:**

**Maximum Power Gain:**

**Horizontal**

**1.000 @ 169° True**

**0.562 @ 243° True**

**0.828**

**2.900 kW**

**0.670 (-1.737 dB)**

**Vertical**

**1.000 @ 57° True**

**0.568 @ 211° True**

**0.788**

**2.900 kW**

**0.670 (-1.737 dB)**

**Total Input Power: 4.326 kW**



Directional Antenna System  
for  
WXEG, Beavercreek, Ohio

(Continued)

ANTENNA SPECIFICATIONS

Antenna Type:	1083-1CP-DA
Frequency:	103.9 MHz
Number of Bays:	1

MECHANICAL SPECIFICATIONS

Mounting:	Custom
System length:	9 ft 5 in
Aperture length required:	20 ft.
Orientation:	28° 24' 10" true
Input flange to the antenna 3 1/8 inch female	

ELECTRICAL SPECIFICATIONS

(For directional use)

Maximum horizontal ERP:	2.9 kW (4.624 dBk)
Horizontal maximum power gain:	0.670 (-1.737 dB)
Maximum vertical ERP:	2.9 kW (4.624 dBk)
Vertical maximum power gain:	0.670 (-1.737 dB)
Total input power:	4.326 kW (6.361 dBk)