

EXHIBIT 21
CANADIAN BORDER

The proposed facilities are located 116 km from the Canadian border. As this distance is less than 320 km, compliance to the Working Arrangement for the Allotment and Assignment of FM Broadcasting Channels under the Agreement between the Government of Canada and the Government of the United States of America relating to the FM Broadcasting Service, effective February 25, 1991, as amended July 9, 1997 is demonstrated in this exhibit.

The following table lists all known, relevant Canadian allotments and assignments, the minimum distances between the proposed facilities and these allotments and assignments, actual distances and margins.

Table 1. Canadian agreement compliance.

Callsign	Channel	Community	Province	Minimum Distance [km]	Actual Distance [km]	Margin [km]
CIMX	204C1	WINDSOR	ON	168.0	147.4	-20.6
	207B	CHATHAM	ON	78.0	218.4	140.4
	207B	CHATHAM	ON	78.0	220.8	142.8

Even though proposed facilities do not satisfy the minimum distance separation requirements with regard to CIMX on channel 204C1, WINDSOR, ON, further analysis shows that no prohibited interference is caused.

The following figure depicts the 54 dBu F(50,50) protected contour of CIMX's actual facilities (100 kW, 176 meters) and the 48 dBu F(50,10) interfering contour from the proposed facilities. The interfering contour of the proposed facilities does not reach the Canadian border nor does it intersect with CIMX's protected contour. Therefore, no area of interference is created.

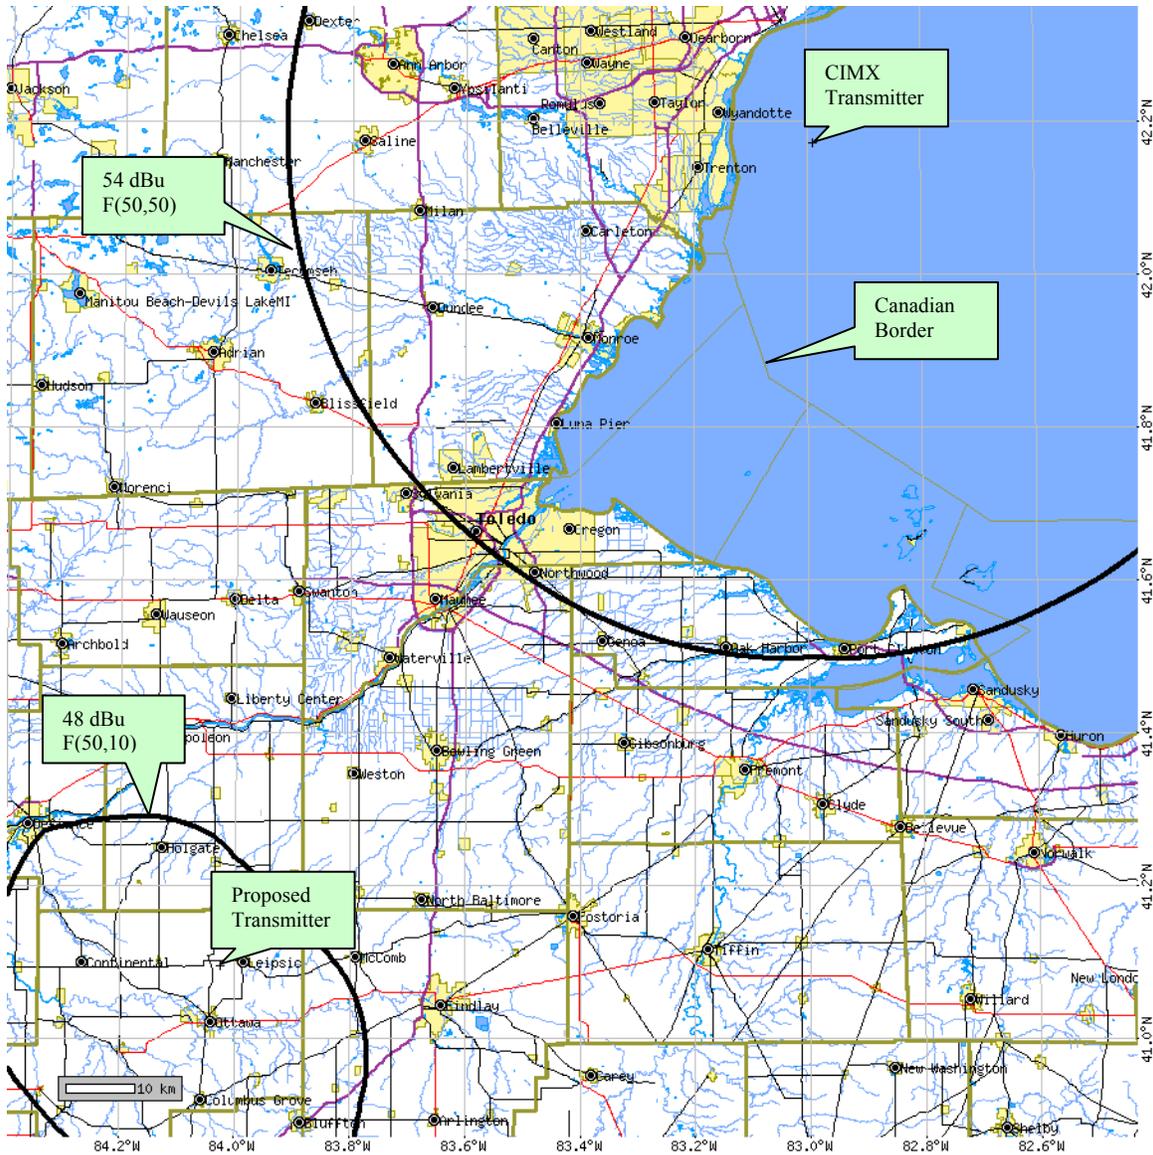


Figure 1. CIMX protected contour and the interfering contour of the proposed facilities. The contours do not overlap and no interference is created. (Canadian land area is not depicted on this map. Canadian territory lies within the blue shaded area.)