



Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

*Directional Antenna System
for
KMST, Breckenridge, Colorado*

June 29, 2005

Electronics Research Inc. is providing a custom fabricated antenna system that is specially designed to meet the FCC requirements and the general needs of radio station KMST.

The antenna is the ERI model MP-2E-DA-HW configuration. The circular polarized system consists of two half-wavelength spaced bays using one driven circular polarized radiating element per bay, two horizontal parasitic elements per bay and two vertical parasitic elements interleaved between the bays. The antenna was mounted on the North 247 degrees East tower leg with bracketry to provide an antenna orientation of North 226 degrees East. The antenna was tested on a 24" Pi-Rod tower, which is the structure the station plans to use to support the array. All tests were performed on a frequency of 102.3 megahertz, which is the center of the FM broadcast channel assigned to KMST.

Pattern measurements were made on a sixty-acre antenna pattern range that is owned and operated by Electronics Research, Inc. The tests were performed under the direction of Thomas B. Silliman, president of Electronics Research, Inc. Mr. Silliman has the Bachelor of Electrical Engineering and the Master of Electrical Engineering degrees from Cornell University and is a registered professional engineer in the states of Indiana, Maryland and Minnesota.

Directional Antenna System For KMST, Breckenridge, Colorado

(Continued)

DESCRIPTION OF THE TEST PROCEDURE


The test antenna consisted of a full-scale model of the complete circular polarized system with the associated horizontal and vertical parasitic elements. The elements and brackets that were used in this test are electrically equivalent to those that will be supplied with the antenna. A section of 3 1/8 inch o.d. rigid coaxial line was used to feed the test antenna, and a section of 3 1/8 inch o.d. rigid outer conductor only was attached above the test antenna. The lines were properly grounded during all tests.

The power distribution and phase relationship to the antenna elements was adjusted in order to achieve the directional radiation patterns for both horizontal and vertical polarization components.

The proof-of-performance was accomplished using a 24" Pi-Rod tower with identical dimension and configuration including all braces, ladders, conduits, coaxial lines and other appurtenances that are included in the actual aperture at which the antenna will be installed. The structure was erected vertically on a turntable mounted on a non-metallic building with the antenna centered vertically on the structure, making the center of radiation of the test approximately 30 feet above ground. The turntable is equipped with a motor drive and azimuth indicating mechanism, resolution of this azimuth measuring device is one-tenth of a degree.

The antenna under test was operated in the transmitting mode and fed from a Wavetek Model 3000 signal generator. The frequency of the signal source was set at 102.3 MHz and was constantly monitored by an Anritsu Model ML521B measuring receiver.

A broad-band horizontal and vertical dipole system, located approximately 628 feet from the test antenna, was used to receive the emitted test signals. The dipole system was mounted at the same height above terrain as the center of the antenna under test. The signals received by the dipole system were fed to the test building by way of two buried Heliax cables to an Anritsu Model ML521B measuring receiver.

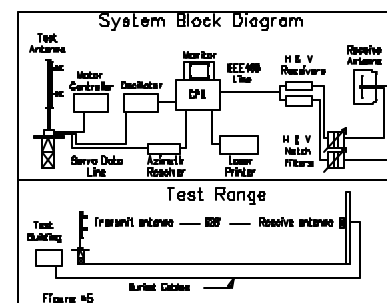

Directional Antenna System
For
KMST, Breckenridge, Colorado

(Continued)

This data was interfaced to a Hewlett-Packard Laser Jet 4P printer by means of a Pentium computer system. Relative field strength was plotted as a function of azimuth.

The measurements were performed by rotating the test antenna in a counter-clockwise direction and plotting the received signal on polar coordinated graph paper in a clockwise direction. Both horizontal and vertical components were recorded separately.

CONCLUSIONS

The circular polarized system consists of two half-wavelength spaced bays using one driven circular polarized radiating element per bay, two horizontal parasitic elements per bay and two vertical parasitic elements interleaved between the bays. The power distribution and phase relationship will be fixed when antenna is manufactured. Proper maintenance of the elements should be all that is required to maintain the pattern in adjustment.

The MP-2E-DA-HW array is to be mounted on the North 247 degrees East tower leg of the 24" Pi-Rod tower at a bearing of North 226 degrees East. Blue prints provided with the antenna will show the proper antenna orientation alignment. The antenna alignment procedure should be directed by a licensed surveyor as prescribed by the FCC.

Figure #1 represents the maximum value of either the horizontal or vertical component at any azimuth. The measured horizontal plane relative field pattern, for both the horizontal and vertical polarization components, is shown on Figure #2 attached. The actual measured pattern does not exceed the authorized FCC composite pattern at any azimuth. A calculated vertical plane relative field pattern is shown on Figure #3 attached. The power in the maximum will reach 6 kilowatts (7.782 dBk).

The power at North 32 degrees East does not exceed 0.317 kilowatts (-4.989 dBk).

The RMS of the vertically polarized horizontal plane component does not exceed the RMS of the horizontally polarized horizontal plane component.

Directional Antenna System
For
KMST, Breckenridge, Colorado

(Continued)

The composite horizontal and vertical maximum relative field pattern obtained from the measured data as shown on Figure #1 has an RMS that is greater than 85% of the filed composite pattern.

The clear vertical length of the structure required to support the antenna is 19 feet 9 in.

The directional antenna should not be mounted on the top of an antenna tower that includes a top-mounted platform larger than the cross-sectional area of the tower in the horizontal plane. No obstructions other than those that are specified by the blue prints supplied with the antenna are to be mounted within 75 ft. horizontally of the system. The vertical distance to the nearest obstruction should be a minimum of 10 ft. from the directional antenna. Metallic guy wires should be a minimum distance of forty feet horizontally from the antenna.

ELECTRONICS RESEARCH, INC.

A handwritten signature in cursive script, appearing to read "Tom Shick", with a horizontal line extending from the end of the signature.

ERI® *Horizontal Plane Relative Field Pattern*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

FIGURE: 1

STATION: KSMT

LOCATION: BRECKENRIDGE, CO

ANTENNA TYPE: MP-2E-DA-HW


STRUCTURE: 24" PI-ROD TOWER

DATE: 6/29/2005

FREQUENCY: 102.3 MHz

ORIENTATION: 226° TRUE

MOUNTING: CUSTOM

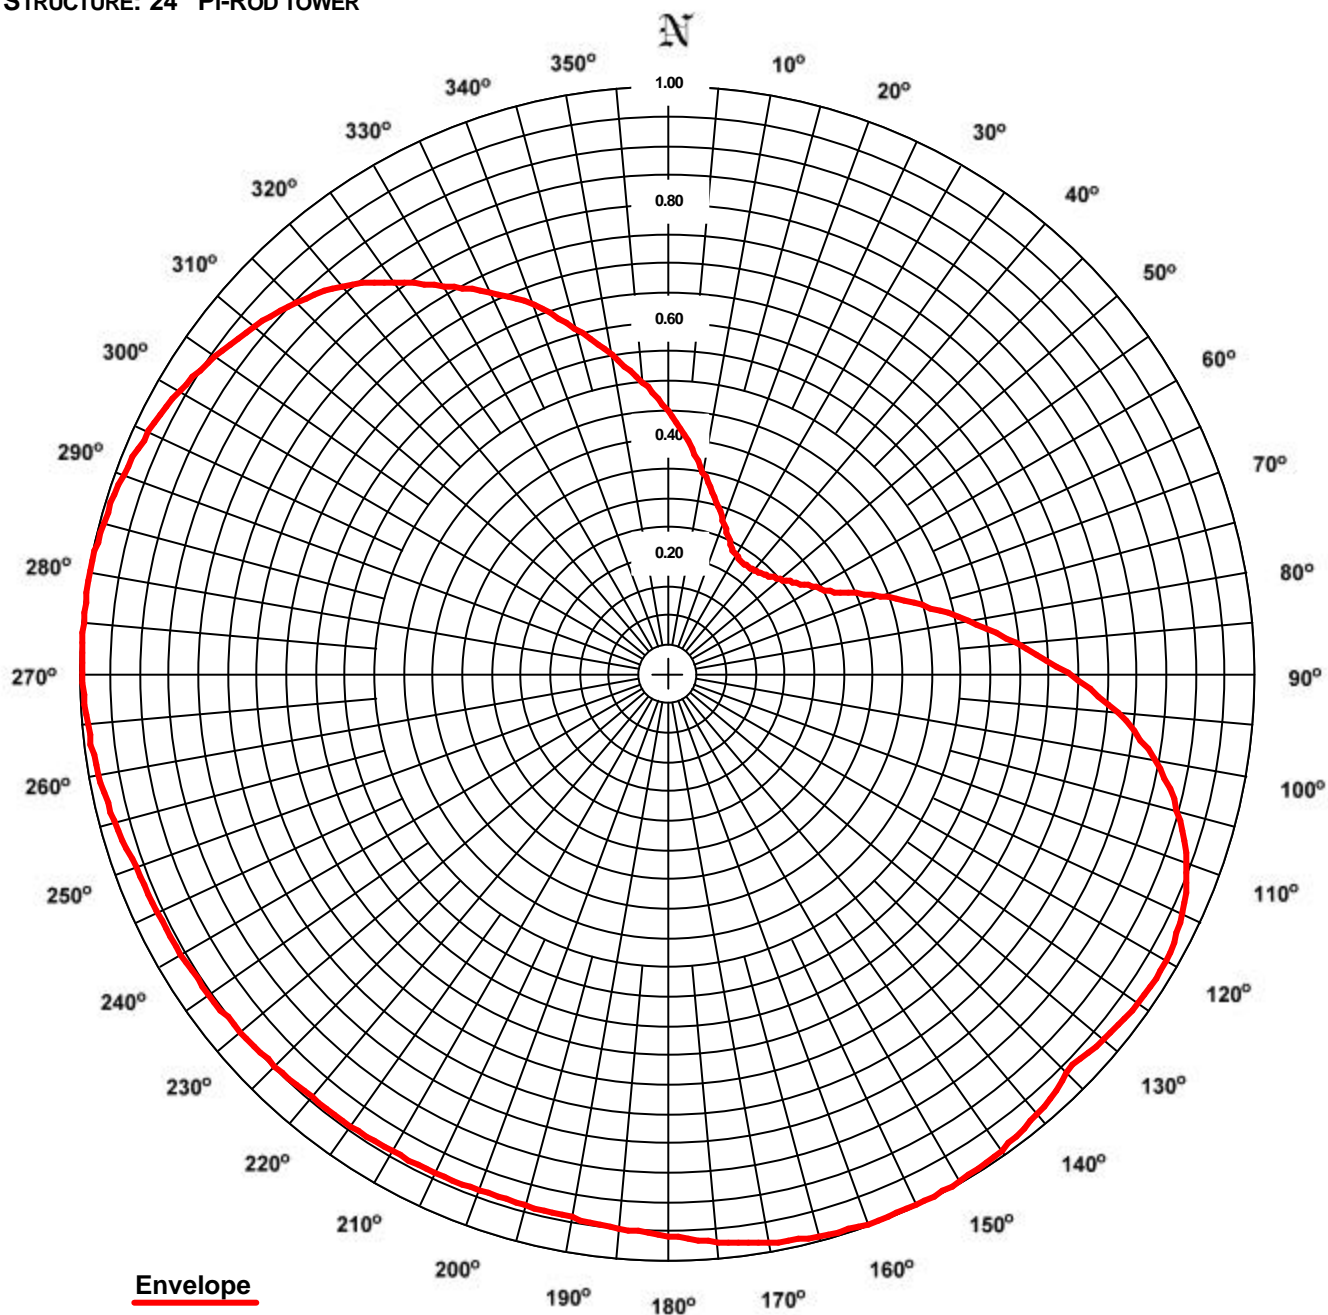

RMS: 0.816

Maximum: 1.000 @ 156° True

Minimum: 0.227 @ 36° True

COMMENTS: COMPOSITE PATTERN: THIS PATTERN SHOWS THE MAXIMUM OF EITHER THE H OR V AZIMUTH VALUES. THIS PATTERN IS GREATER THAN 85% OF THE FCC FILED COMPOSITE PATTERN BPH-20050505ABJ

ERI® *Horizontal Plane Relative Field List*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

Station: KSMT
Location: Breckenridge, CO
Frequency: 102.3 MHz

Antenna: MP-2E-DA-HW
Orientation: 226° True
Tower: 24" Pi-Rod tower

Figure: 1
Date: 6/29/2005
Reference: ksmt1m.fig

Angle	Envelope			Polarization	Angle	Envelope			Polarization
	Field	kW	dBk			Field	kW	dBk	
0°	0.449	1.21	0.82	Horizontal	180°	0.959	5.52	7.42	Vertical
5°	0.397	0.94	-0.25	Horizontal	185°	0.949	5.40	7.33	Vertical
10°	0.349	0.73	-1.36	Horizontal	190°	0.942	5.32	7.26	Vertical
15°	0.311	0.58	-2.37	Horizontal	195°	0.938	5.28	7.23	Vertical
20°	0.277	0.46	-3.37	Horizontal	200°	0.938	5.28	7.23	Vertical
25°	0.249	0.37	-4.29	Horizontal	205°	0.939	5.29	7.23	Vertical
30°	0.233	0.33	-4.88	Vertical	210°	0.940	5.30	7.24	Vertical
35°	0.227	0.31	-5.09	Vertical	215°	0.942	5.32	7.26	Vertical
40°	0.229	0.32	-5.02	Vertical	220°	0.944	5.35	7.28	Vertical
45°	0.237	0.34	-4.73	Vertical	225°	0.947	5.38	7.31	Vertical
50°	0.250	0.37	-4.26	Vertical	230°	0.951	5.42	7.34	Vertical
55°	0.268	0.43	-3.64	Vertical	235°	0.954	5.46	7.38	Vertical
60°	0.292	0.51	-2.90	Vertical	240°	0.958	5.50	7.41	Vertical
65°	0.324	0.63	-2.01	Horizontal	245°	0.961	5.54	7.43	Vertical
70°	0.386	0.90	-0.48	Horizontal	250°	0.963	5.57	7.46	Horizontal
75°	0.449	1.21	0.83	Horizontal	255°	0.975	5.71	7.57	Horizontal
80°	0.519	1.62	2.09	Horizontal	260°	0.985	5.82	7.65	Horizontal
85°	0.596	2.13	3.28	Horizontal	265°	0.992	5.91	7.72	Horizontal
90°	0.682	2.79	4.46	Horizontal	270°	0.997	5.97	7.76	Horizontal
95°	0.770	3.56	5.51	Horizontal	275°	1.000	6.00	7.78	Horizontal
100°	0.842	4.25	6.29	Horizontal	280°	0.999	5.99	7.77	Horizontal
105°	0.899	4.85	6.86	Horizontal	285°	0.995	5.94	7.74	Horizontal
110°	0.941	5.32	7.26	Horizontal	290°	0.987	5.85	7.67	Horizontal
115°	0.968	5.63	7.50	Horizontal	295°	0.976	5.71	7.57	Horizontal
120°	0.980	5.77	7.61	Horizontal	300°	0.961	5.54	7.43	Horizontal
125°	0.979	5.75	7.59	Horizontal	305°	0.942	5.32	7.26	Horizontal
130°	0.970	5.65	7.52	Horizontal	310°	0.920	5.08	7.06	Horizontal
135°	0.963	5.56	7.45	Vertical	315°	0.894	4.80	6.81	Horizontal
140°	0.980	5.76	7.61	Vertical	320°	0.860	4.44	6.47	Horizontal
145°	0.992	5.91	7.71	Vertical	325°	0.812	3.96	5.98	Horizontal
150°	0.999	5.98	7.77	Vertical	330°	0.763	3.49	5.43	Horizontal
155°	1.000	6.00	7.78	Vertical	335°	0.717	3.08	4.89	Horizontal
160°	0.999	5.98	7.77	Vertical	340°	0.668	2.68	4.28	Horizontal
165°	0.994	5.92	7.73	Vertical	345°	0.609	2.22	3.47	Horizontal
170°	0.985	5.82	7.65	Vertical	350°	0.551	1.82	2.60	Horizontal
175°	0.973	5.68	7.55	Vertical	355°	0.498	1.49	1.73	Horizontal

Polarization:
Maximum Field:
Minimum Field:
RMS:
Maximum ERP:
Maximum Power Gain:

Envelope
1.000 @ 156° True
0.227 @ 36° True
0.816
6.000 kW
1.076 (0.316 dB)


Total Input Power: 5.578 kW

ERI® *Horizontal Plane Relative Field Pattern*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

FIGURE NO: 2
STATION: KSMT
LOCATION: BRECKENRIDGE, CO
ANTENNA: MP-2E-DA-HW
STRUCTURE: 24" PI-ROD TOWER

DATE: 6/29/2005
FREQUENCY: 102.3 MHz
ORIENTATION: 226° TRUE
MOUNTING: CUSTOM
BAYS TESTED: TWO

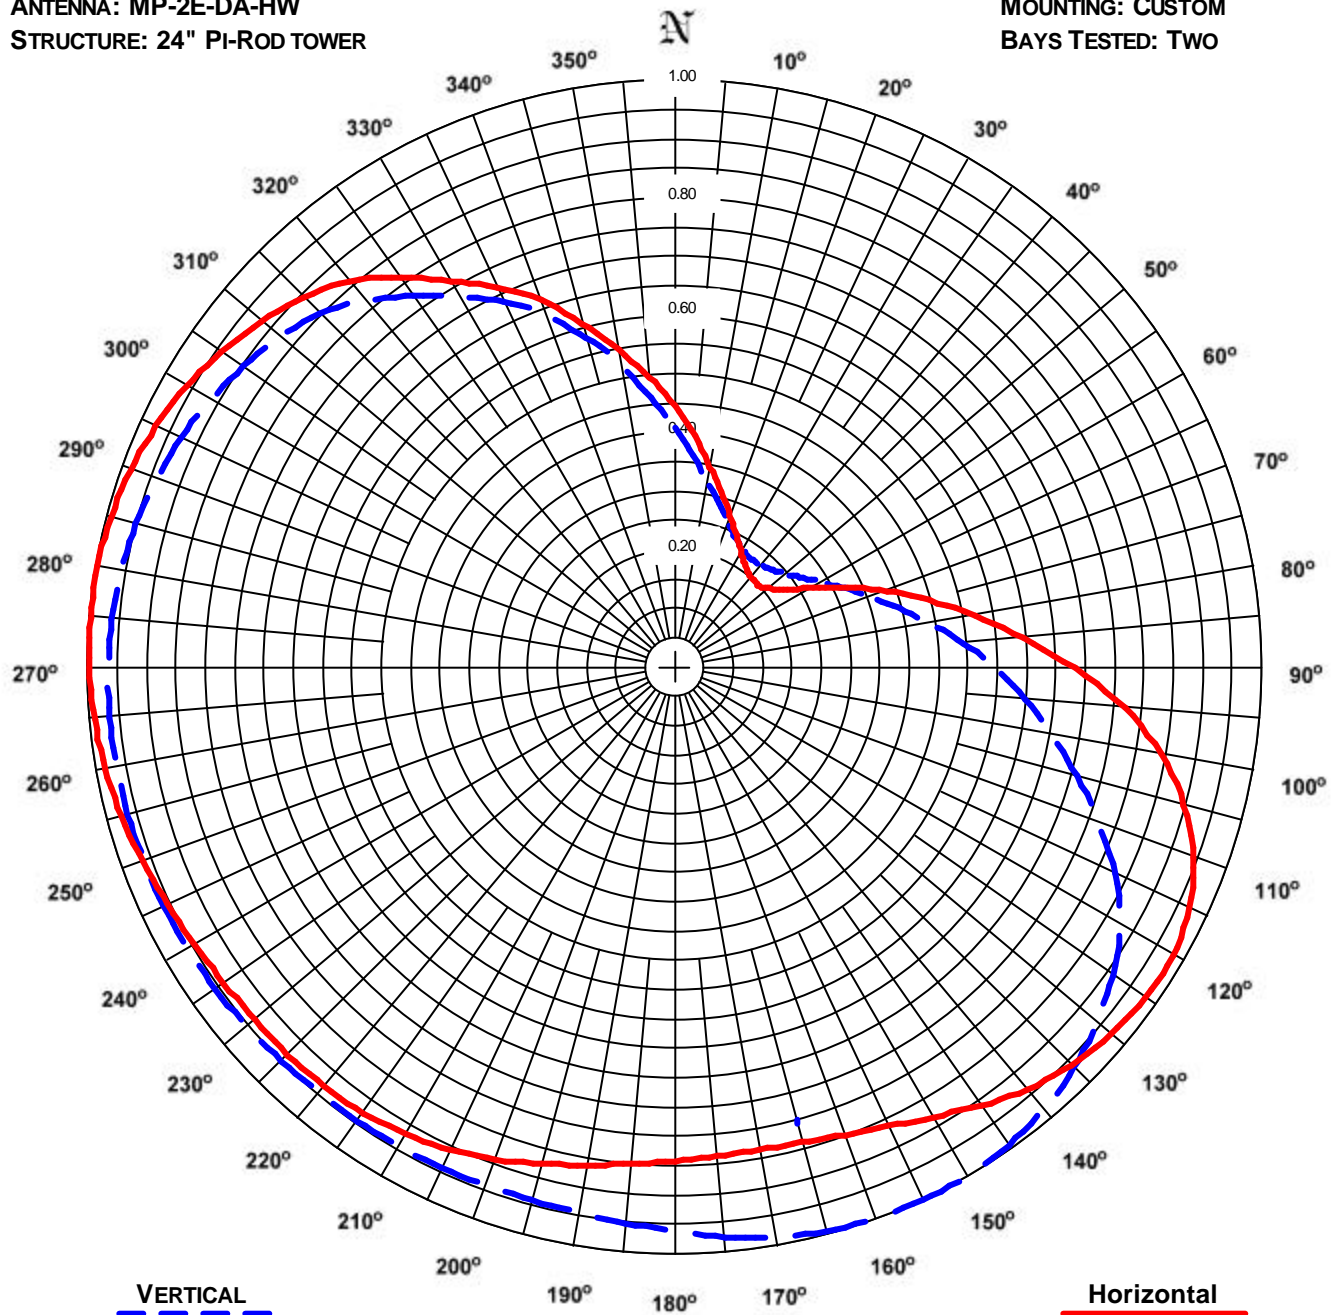

RMS: 0.785
MAXIMUM: 1.000 @ 156° TRUE
MINIMUM: 0.227 @ 36° TRUE

RMS: 0.790
Maximum: 1.000 @ 277° True
Minimum: 0.201 @ 44° True

COMMENTS: MEASURED PATTERNS OF THE HORIZONTAL AND VERTICAL COMPONENTS.

ERI[®] *Horizontal Plane Relative Field List*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

Station: KSMT
Location: Breckenridge, CO
Frequency: 102.3 MHz

Antenna: MP-2E-DA-HW
Orientation: 226° True
Tower: 24" Pi-Rod tower

Figure: 2
Date: 6/29/2005
Reference: ksmt1m.fig

Angle	Horizontal			Vertical			Angle	Horizontal			Vertical		
	Field	kW	dBk	Field	kW	dBk		Field	kW	dBk	Field	kW	dBk
0°	0.449	1.21	0.82	0.410	1.01	0.04	180°	0.840	4.23	6.27	0.959	5.52	7.42
5°	0.397	0.94	-0.25	0.363	0.79	-1.01	185°	0.848	4.32	6.35	0.949	5.40	7.33
10°	0.349	0.73	-1.36	0.324	0.63	-2.02	190°	0.860	4.43	6.47	0.942	5.32	7.26
15°	0.311	0.58	-2.37	0.291	0.51	-2.96	195°	0.874	4.58	6.61	0.938	5.28	7.23
20°	0.277	0.46	-3.37	0.264	0.42	-3.77	200°	0.891	4.76	6.78	0.938	5.28	7.23
25°	0.249	0.37	-4.29	0.245	0.36	-4.43	205°	0.905	4.92	6.92	0.939	5.29	7.23
30°	0.227	0.31	-5.08	0.233	0.33	-4.88	210°	0.917	5.04	7.03	0.940	5.30	7.24
35°	0.212	0.27	-5.69	0.227	0.31	-5.09	215°	0.925	5.13	7.10	0.942	5.32	7.26
40°	0.203	0.25	-6.06	0.229	0.32	-5.02	220°	0.930	5.19	7.15	0.944	5.35	7.28
45°	0.201	0.24	-6.14	0.237	0.34	-4.73	225°	0.932	5.21	7.17	0.947	5.38	7.31
50°	0.212	0.27	-5.70	0.250	0.37	-4.26	230°	0.933	5.23	7.18	0.951	5.42	7.34
55°	0.236	0.33	-4.77	0.268	0.43	-3.64	235°	0.937	5.27	7.22	0.954	5.46	7.38
60°	0.273	0.45	-3.49	0.292	0.51	-2.90	240°	0.944	5.34	7.28	0.958	5.50	7.41
65°	0.324	0.63	-2.01	0.322	0.62	-2.07	245°	0.952	5.44	7.36	0.961	5.54	7.43
70°	0.386	0.90	-0.48	0.357	0.76	-1.18	250°	0.963	5.57	7.46	0.963	5.56	7.45
75°	0.449	1.21	0.83	0.397	0.94	-0.25	255°	0.975	5.71	7.57	0.964	5.58	7.47
80°	0.519	1.62	2.09	0.443	1.17	0.70	260°	0.985	5.82	7.65	0.966	5.59	7.48
85°	0.596	2.13	3.28	0.494	1.46	1.65	265°	0.992	5.91	7.72	0.966	5.60	7.48
90°	0.682	2.79	4.46	0.545	1.78	2.51	270°	0.997	5.97	7.76	0.966	5.60	7.48
95°	0.770	3.56	5.51	0.599	2.16	3.33	275°	1.000	6.00	7.78	0.963	5.56	7.45
100°	0.842	4.25	6.29	0.654	2.57	4.09	280°	0.999	5.99	7.77	0.958	5.50	7.41
105°	0.899	4.85	6.86	0.710	3.02	4.81	285°	0.995	5.94	7.74	0.950	5.42	7.34
110°	0.941	5.32	7.26	0.768	3.54	5.49	290°	0.987	5.85	7.67	0.940	5.31	7.25
115°	0.968	5.63	7.50	0.829	4.13	6.16	295°	0.976	5.71	7.57	0.928	5.17	7.13
120°	0.980	5.77	7.61	0.878	4.62	6.65	300°	0.961	5.54	7.43	0.914	5.01	7.00
125°	0.979	5.75	7.59	0.912	4.99	6.98	305°	0.942	5.32	7.26	0.897	4.83	6.84
130°	0.970	5.65	7.52	0.940	5.30	7.24	310°	0.920	5.08	7.06	0.878	4.62	6.65
135°	0.956	5.49	7.39	0.963	5.56	7.45	315°	0.894	4.80	6.81	0.856	4.40	6.43
140°	0.936	5.26	7.21	0.980	5.76	7.61	320°	0.860	4.44	6.47	0.819	4.03	6.05
145°	0.910	4.97	6.96	0.992	5.91	7.71	325°	0.812	3.96	5.98	0.775	3.60	5.56
150°	0.883	4.68	6.70	0.999	5.98	7.77	330°	0.763	3.49	5.43	0.731	3.21	5.06
155°	0.861	4.45	6.49	1.000	6.00	7.78	335°	0.717	3.08	4.89	0.689	2.85	4.55
160°	0.846	4.29	6.33	0.999	5.98	7.77	340°	0.668	2.68	4.28	0.638	2.44	3.88
165°	0.837	4.20	6.23	0.994	5.92	7.73	345°	0.609	2.22	3.47	0.584	2.05	3.11
170°	0.833	4.16	6.19	0.985	5.82	7.65	350°	0.551	1.82	2.60	0.524	1.65	2.17
175°	0.835	4.18	6.21	0.973	5.68	7.55	355°	0.498	1.49	1.73	0.464	1.29	1.11

Polarization:	Horizontal	Vertical
Maximum Field:	1.000 @ 277° True	1.000 @ 156° True
Minimum Field:	0.201 @ 44° True	0.227 @ 36° True
RMS:	0.790	0.785
Maximum ERP:	6.000 kW	6.000 kW
Maximum Power Gain:	1.076 (0.316 dB)	1.076 (0.316 dB)

Total Input Power: 5.578 kW




Vertical Plane Relative Field Pattern

KSMT, Breckenridge, CO, 102.3 MHz

Figure#: 3

Date: 6/29/2005

A 2 level, .5 wave-length spaced MP-2E-DA-HW directional antenna with 0° beam tilt, 0% null fill and a H/V maximum power ratio of 1.000

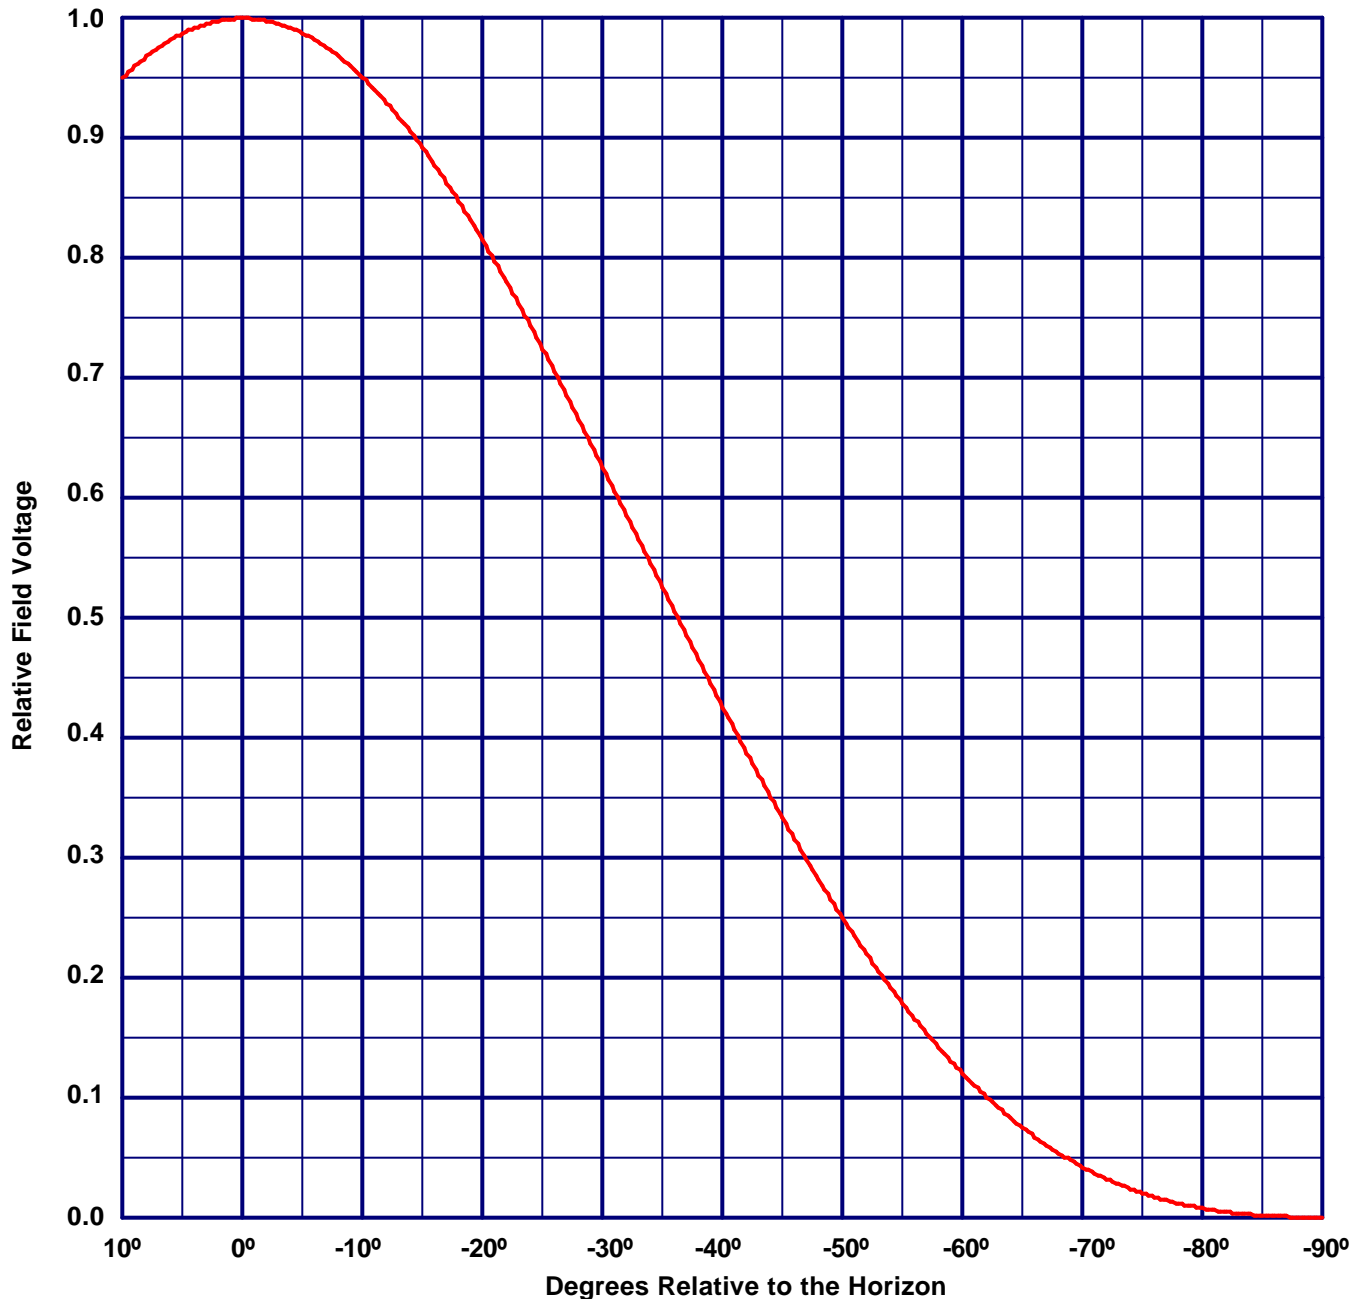

Vertical Polarization Gain:

Maximum: 1.076 (0.316 dB)

Horizontal Plane: 1.076 (0.316 dB)

Horizontal Polarization Gain:

Maximum: 1.076 (0.316 dB)

Horizontal Plane: 1.076 (0.316 dB)

Directional Antenna System for KMST, Breckenridge, Colorado

(Continued)

ANTENNA SPECIFICATIONS

Antenna Type: MP-2E-DA-HW
Frequency: 102.3 MHz
Number of Bays: 2

MECHANICAL SPECIFICATIONS

Mounting: Custom
System length: 13 ft 2 in
Aperture length required: 19 ft 9 in.
Orientation: 226° true
Input flange to the antenna 3 1/8 inch female

ELECTRICAL SPECIFICATIONS

(For directional use)

Maximum horizontal ERP: 6 kW (7.782 dBk)
Horizontal maximum power gain: 1.076 (.316 dB)
Maximum vertical ERP: 6 kW (7.782 dBk)
Vertical maximum power gain: 1.076 (.316 dB)
Total input power: 5.578 kW (7.465 dBk)

