


Exhibit 13

No LPFM Preclusion study is included, as this site is far from any Appendix A markets or Top 50 Spectrum limited markets.

The applicant is proposing a fill-in translator. The map below shows the protected contour of the proposed translator, which is entirely within the protected contour of the primary station, KYSL.

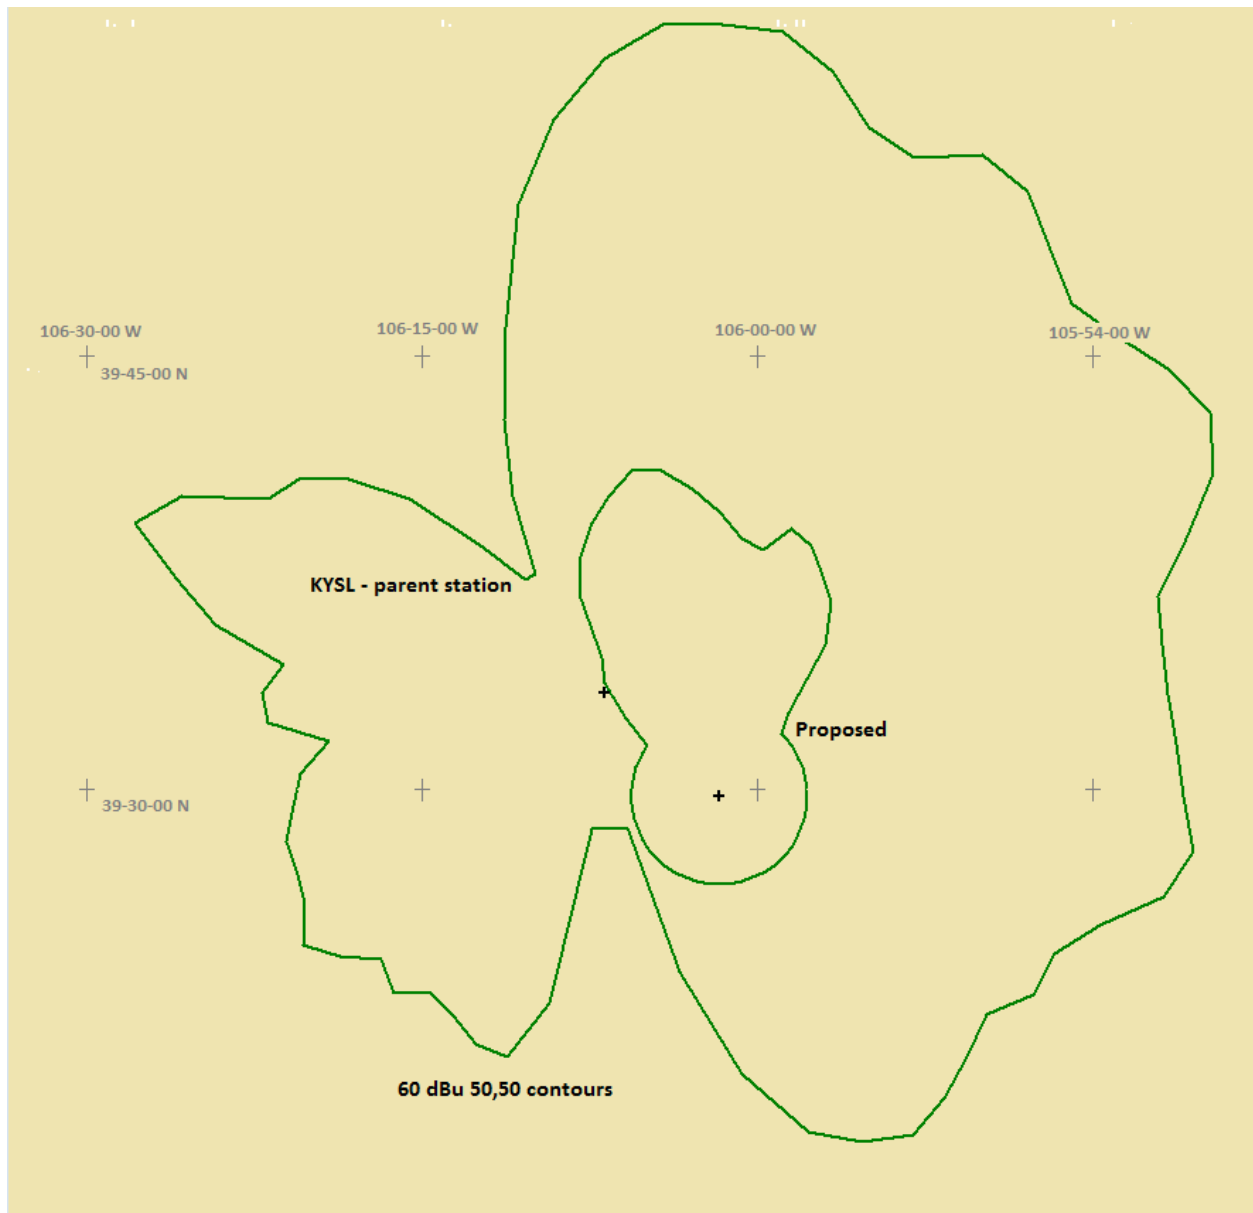

There is no prohibited overlap with other facilities. The map below shows the 40 dBu 50,10 interfering contour of the proposed facility (in red), which does not overlap the protected contour of co-channel stations KTCL and K227CA. The 54 dBu 50,10 interfering contour of the proposed facility does not overlap 1st adjacent channel stations K226AH and K228AG. All second or third adjacent channel stations have ample margin.



I.F. separation was not considered as the proposed facility is less than 100 watts.

Also, this proposal is third adjacent to the primary station; its 100 dBu interfering contour extends less than one km from the site, and will not cause interference in the primary station's city of license, which is 10 km away.