

[Exhibit 13]

Non-Interference Compliance

Regarding Facility id 151787

Channel 278

Description of Exhibit 13 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Pages 4 through 5 include a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 6 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dBμ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 7 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 8 of this exhibit is an aerial photo of the vicinity surrounding the proposed translator's tower site.

Note: The tallest buildings within the zone of predicted interference are less than 20ft (6.1m) in height. This application provides 26.3m (86.3ft) of ground clearance, so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

Application_id	File Number	Callsign	Contour at Tower	Min. Contour
1105669	BLH20051227AGO	WTYB	87.3	85.4
1433573	BLH20110629BVB	WGZO	61.1	61.1
1441905	BLH20110830ABP	WTYB	87.3	85.4
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				61.1

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **61.1 dBμ**, this makes the proposed translator's worst-case interfering contour **101.1 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **977.2 m** from the transmit antenna.

The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 7 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **26.3 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference.


Note: The tallest buildings within the zone of predicted interference are less than 20ft (6.1m) in height. This application provides 26.3m (86.3ft) of ground clearance, so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Antenna Manufacturer: PSI
Antenna Model: FML-4 (.75)
CORAGL: 148 m
Maximum ERP: 0.25 kW
Interfering Contour: 101.1 dBμ
Max Int. Contour Distance: 977.2 m
Min Ground Clearance: 26.3 m

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
5	.894	199.8	873.6	870.3	71.9
10	.617	95.2	602.9	593.8	43.3
15	.272	18.5	265.8	256.7	79.2
20	.027	0.2	26.4	24.8	139.0
25	.201	10.1	196.4	178.0	65.0
30	.234	13.7	228.7	198.0	33.7
35	.161	6.5	157.3	128.9	57.8
40	.043	0.5	42.0	32.2	121.0
45	.086	1.8	84.0	59.4	88.6
50	.133	4.4	130.0	83.5	48.4
55	.152	5.8	148.5	85.2	26.3
60	.133	4.4	130.0	65.0	35.4
65	.097	2.4	94.8	40.1	62.1
70	.057	0.8	55.7	19.1	95.7
75	.027	0.2	26.4	6.8	122.5
80	.008	0.0	7.8	1.4	140.3
85	.001	0.0	1.0	0.1	147.0
90	.001	0.0	1.0	0.0	147.0
Minimum Clearance above TGL:					26.3 m



Relative Field Elevation Pattern
Model: PSIFML-4
Type: 4-Bay Low Power FM
Polarization: Circular
Configuration: 3/4-wave spaced
Gain: 1.85 (2.67 dB)

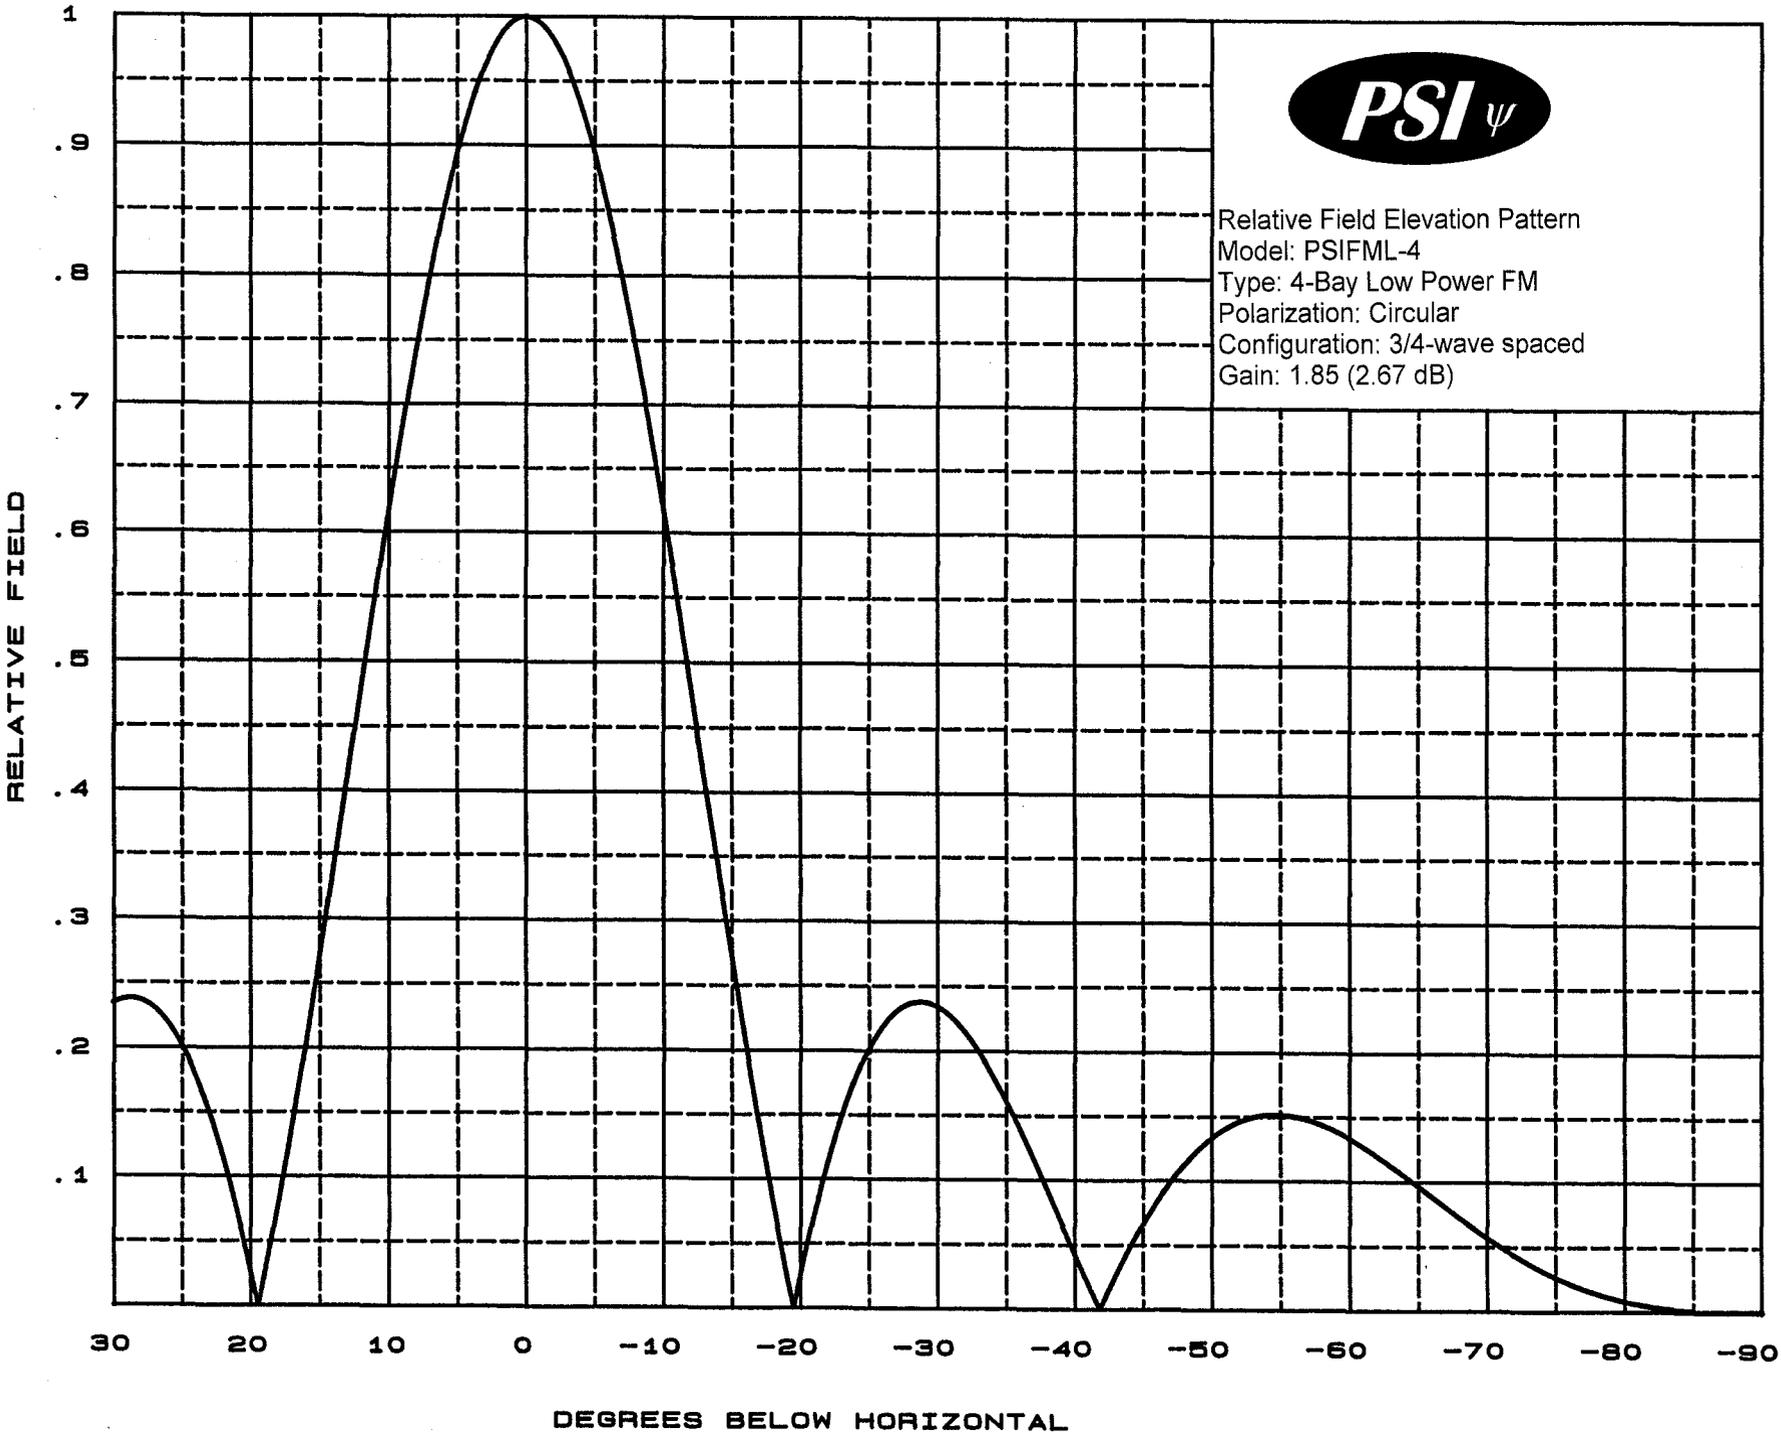



Propagation Systems Inc.
 Elevation Pattern Tabulation
 Antenna: PSIFML-4 Special
 Bay spacing: 3/4 wave

Angle	Field	dB	Angle	Field	dB	Angle	Field	dB
-90.0	0.001	-60.828	-50.0	0.133	-17.511	-10.0	0.617	-4.190
-89.0	0.001	-60.828	-49.0	0.124	-18.146	-9.0	0.682	-3.325
-88.0	0.001	-60.828	-48.0	0.112	-18.995	-8.0	0.743	-2.583
-87.0	0.001	-60.828	-47.0	0.099	-20.093	-7.0	0.799	-1.950
-86.0	0.001	-60.828	-46.0	0.083	-21.568	-6.0	0.850	-1.415
-85.0	0.001	-60.828	-45.0	0.066	-23.581	-5.0	0.894	-0.974
-84.0	0.002	-54.807	-44.0	0.047	-26.536	-4.0	0.931	-0.618
-83.0	0.003	-50.816	-43.0	0.027	-31.530	-3.0	0.961	-0.346
-82.0	0.004	-47.448	-42.0	0.004	-47.143	-2.0	0.982	-0.154
-81.0	0.006	-44.350	-41.0	0.018	-34.664	-1.0	0.996	-0.038
-80.0	0.008	-41.584	-40.0	0.043	-27.417	0.0	1.000	0.000
-79.0	0.011	-39.244	-39.0	0.067	-23.482	1.0	0.996	-0.038
-78.0	0.014	-37.021	-38.0	0.092	-20.770	2.0	0.983	-0.153
-77.0	0.018	-35.027	-37.0	0.116	-18.740	3.0	0.961	-0.345
-76.0	0.022	-33.164	-36.0	0.139	-17.134	4.0	0.931	-0.618
-75.0	0.027	-31.481	-35.0	0.161	-15.860	5.0	0.894	-0.972
-74.0	0.032	-29.946	-34.0	0.181	-14.829	6.0	0.850	-1.415
-73.0	0.037	-28.537	-33.0	0.199	-14.006	7.0	0.799	-1.948
-72.0	0.044	-27.203	-32.0	0.215	-13.370	8.0	0.743	-2.582
-71.0	0.050	-25.968	-31.0	0.226	-12.904	9.0	0.682	-3.325
-70.0	0.057	-24.841	-30.0	0.234	-12.607	10.0	0.617	-4.188
-69.0	0.065	-23.782	-29.0	0.238	-12.473	11.0	0.550	-5.193
-68.0	0.072	-22.802	-28.0	0.237	-12.517	12.0	0.481	-6.361
-67.0	0.080	-21.905	-27.0	0.230	-12.748	13.0	0.411	-7.728
-66.0	0.088	-21.078	-26.0	0.219	-13.200	14.0	0.341	-9.347
-65.0	0.097	-20.308	-25.0	0.201	-13.920	15.0	0.272	-11.305
-64.0	0.105	-19.614	-24.0	0.178	-14.983	16.0	0.205	-13.752
-63.0	0.112	-18.995	-23.0	0.149	-16.540	17.0	0.141	-16.993
-62.0	0.120	-18.427	-22.0	0.114	-18.867	18.0	0.081	-21.840
-61.0	0.127	-17.926	-21.0	0.073	-22.712	19.0	0.025	-32.147
-60.0	0.133	-17.491	-20.0	0.027	-31.431	20.0	0.027	-31.481
-59.0	0.139	-17.125	-19.0	0.025	-32.201	21.0	0.073	-22.730
-58.0	0.144	-16.827	-18.0	0.081	-21.840	22.0	0.114	-18.867
-57.0	0.148	-16.602	-17.0	0.141	-16.993	23.0	0.149	-16.540
-56.0	0.150	-16.452	-16.0	0.205	-13.752	24.0	0.178	-14.990
-55.0	0.152	-16.374	-15.0	0.272	-11.310	25.0	0.201	-13.920
-54.0	0.152	-16.391	-14.0	0.341	-9.351	26.0	0.219	-13.200
-53.0	0.150	-16.496	-13.0	0.411	-7.731	27.0	0.230	-12.748
-52.0	0.146	-16.709	-12.0	0.481	-6.364	28.0	0.237	-12.517
-51.0	0.141	-17.040	-11.0	0.550	-5.195	29.0	0.238	-12.473
						30.0	0.234	-12.607

file: FML 4-bay elevation tabulation

revision: A

Date: 1/28/08


Adjacent Channel Study For Station NEW, Facility_id: 151787

Co-channel through third adjacent:

Application_id	Facility_id	Prefix	ARN	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Channel	Adj	Dist	Overlap
1105669	14069	BLH	20051227AGO	WTYB	VOLT RADIO, LLC, AS TRUSTEE	C2	TYBEE ISLAND	GA	LIC	50	106	280	2	10.2	1.4918
1441905	14069	BLH	20110830ABP	WTYB	VOLT RADIO, LLC, AS TRUSTEE	C2	BLUFFTON	SC	LIC	50	106	280	2	10.2	1.4918
1155686	14069	BXLH	20061020ACS	WTYB	VOLT RADIO, LLC, AS TRUSTEE	C2	TYBEE ISLAND	GA	LIC	15	106	280	2	10.2	1.4918
1433573	49910	BLH	20110629BVB	WGZO	MONTEREY LICENSES, LLC	C3	PARRIS ISLAND	SC	LIC	11	115.8	276	2	32.8	1.4918
299365	96362	Null	Null	Null		C3	PARRIS ISLAND	SC	USE	0	0	276	2	54.7	0
298869	51398	Null	Null	WPMX	GEORGIA EAGLE MEDIA, INC.	C3	STATESBORO	GA	USE	0	0	275	3	84.5	0
1180811	151458	BLFT	20070409AAA	W279AR	EDGEWATER BROADCASTING, INC.	D	JESUP	GA	LIC	0.005	41	279	1	87.1	0
212898	51398	BLH	19950818KA	WPMX	GEORGIA EAGLE MEDIA, INC.	C3	STATESBORO	GA	LIC	25	166	275	3	91.2	0
299952	73932	Null	Null	WRBX	WILLIAM KEITH REGISTER	A	REIDSVILLE	GA	USE	0	0	281	3	91.9	0
300214	96589	Null	Null	Null		A	METTER	GA	USE	0	0	279	1	94.7	0
285872	73932	BLH	19990603KI	WRBX	WILLIAM KEITH REGISTER	A	REIDSVILLE	GA	LIC	4.9	158	281	3	95.1	0
204164	73247	BMLH	19941118KF	WBMZ	WM. JIMMY PAGE, TR/AS RADIO METTER	A	METTER	GA	APP	6	160	279	1	95.1	0
200765	472	BLH	19940706KB	WRJY	GOLDEN ISLES BROADCASTING, LLC	A	BRUNSWICK	GA	LIC	4.2	120	281	3	100.9	0
291341	472	Null	Null	WRJY	GOLDEN ISLES BROADCASTING, LLC	A	BRUNSWICK	GA	USE	0	0	281	3	103.9	0
1513845	151451	BPFT	20120831AAK	W279BC	EDGEWATER BROADCASTING, INC.	D	BRUNSWICK	GA	CP	0.25	68	279	1	106	0
1473851	151451	BLFT	20110511AGY	W279BC	EDGEWATER BROADCASTING, INC.	D	BRUNSWICK	GA	LIC	0.25	82	279	1	106	0
295065	65020	Null	Null	WQGA	QANTUM OF BRUNSWICK LICENSE COMPANY,	C0	WAYCROSS	GA	USE	0	0	277	1	127.5	0
1352393	65020	BMLH	20100114ABV	WQGA	QANTUM OF BRUNSWICK LICENSE COMPANY,	C0	WAYCROSS	GA	LIC	100	319	277	1	127.5	0

Intermediate Frequencies (53 and 54 channels difference):

Application_id	Facility_id	Prefix	ARN	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Channel	Adj	Dist	Clr
----------------	-------------	--------	-----	------	----------	-------	------	-------	--------	-----	--------	---------	-----	------	-----

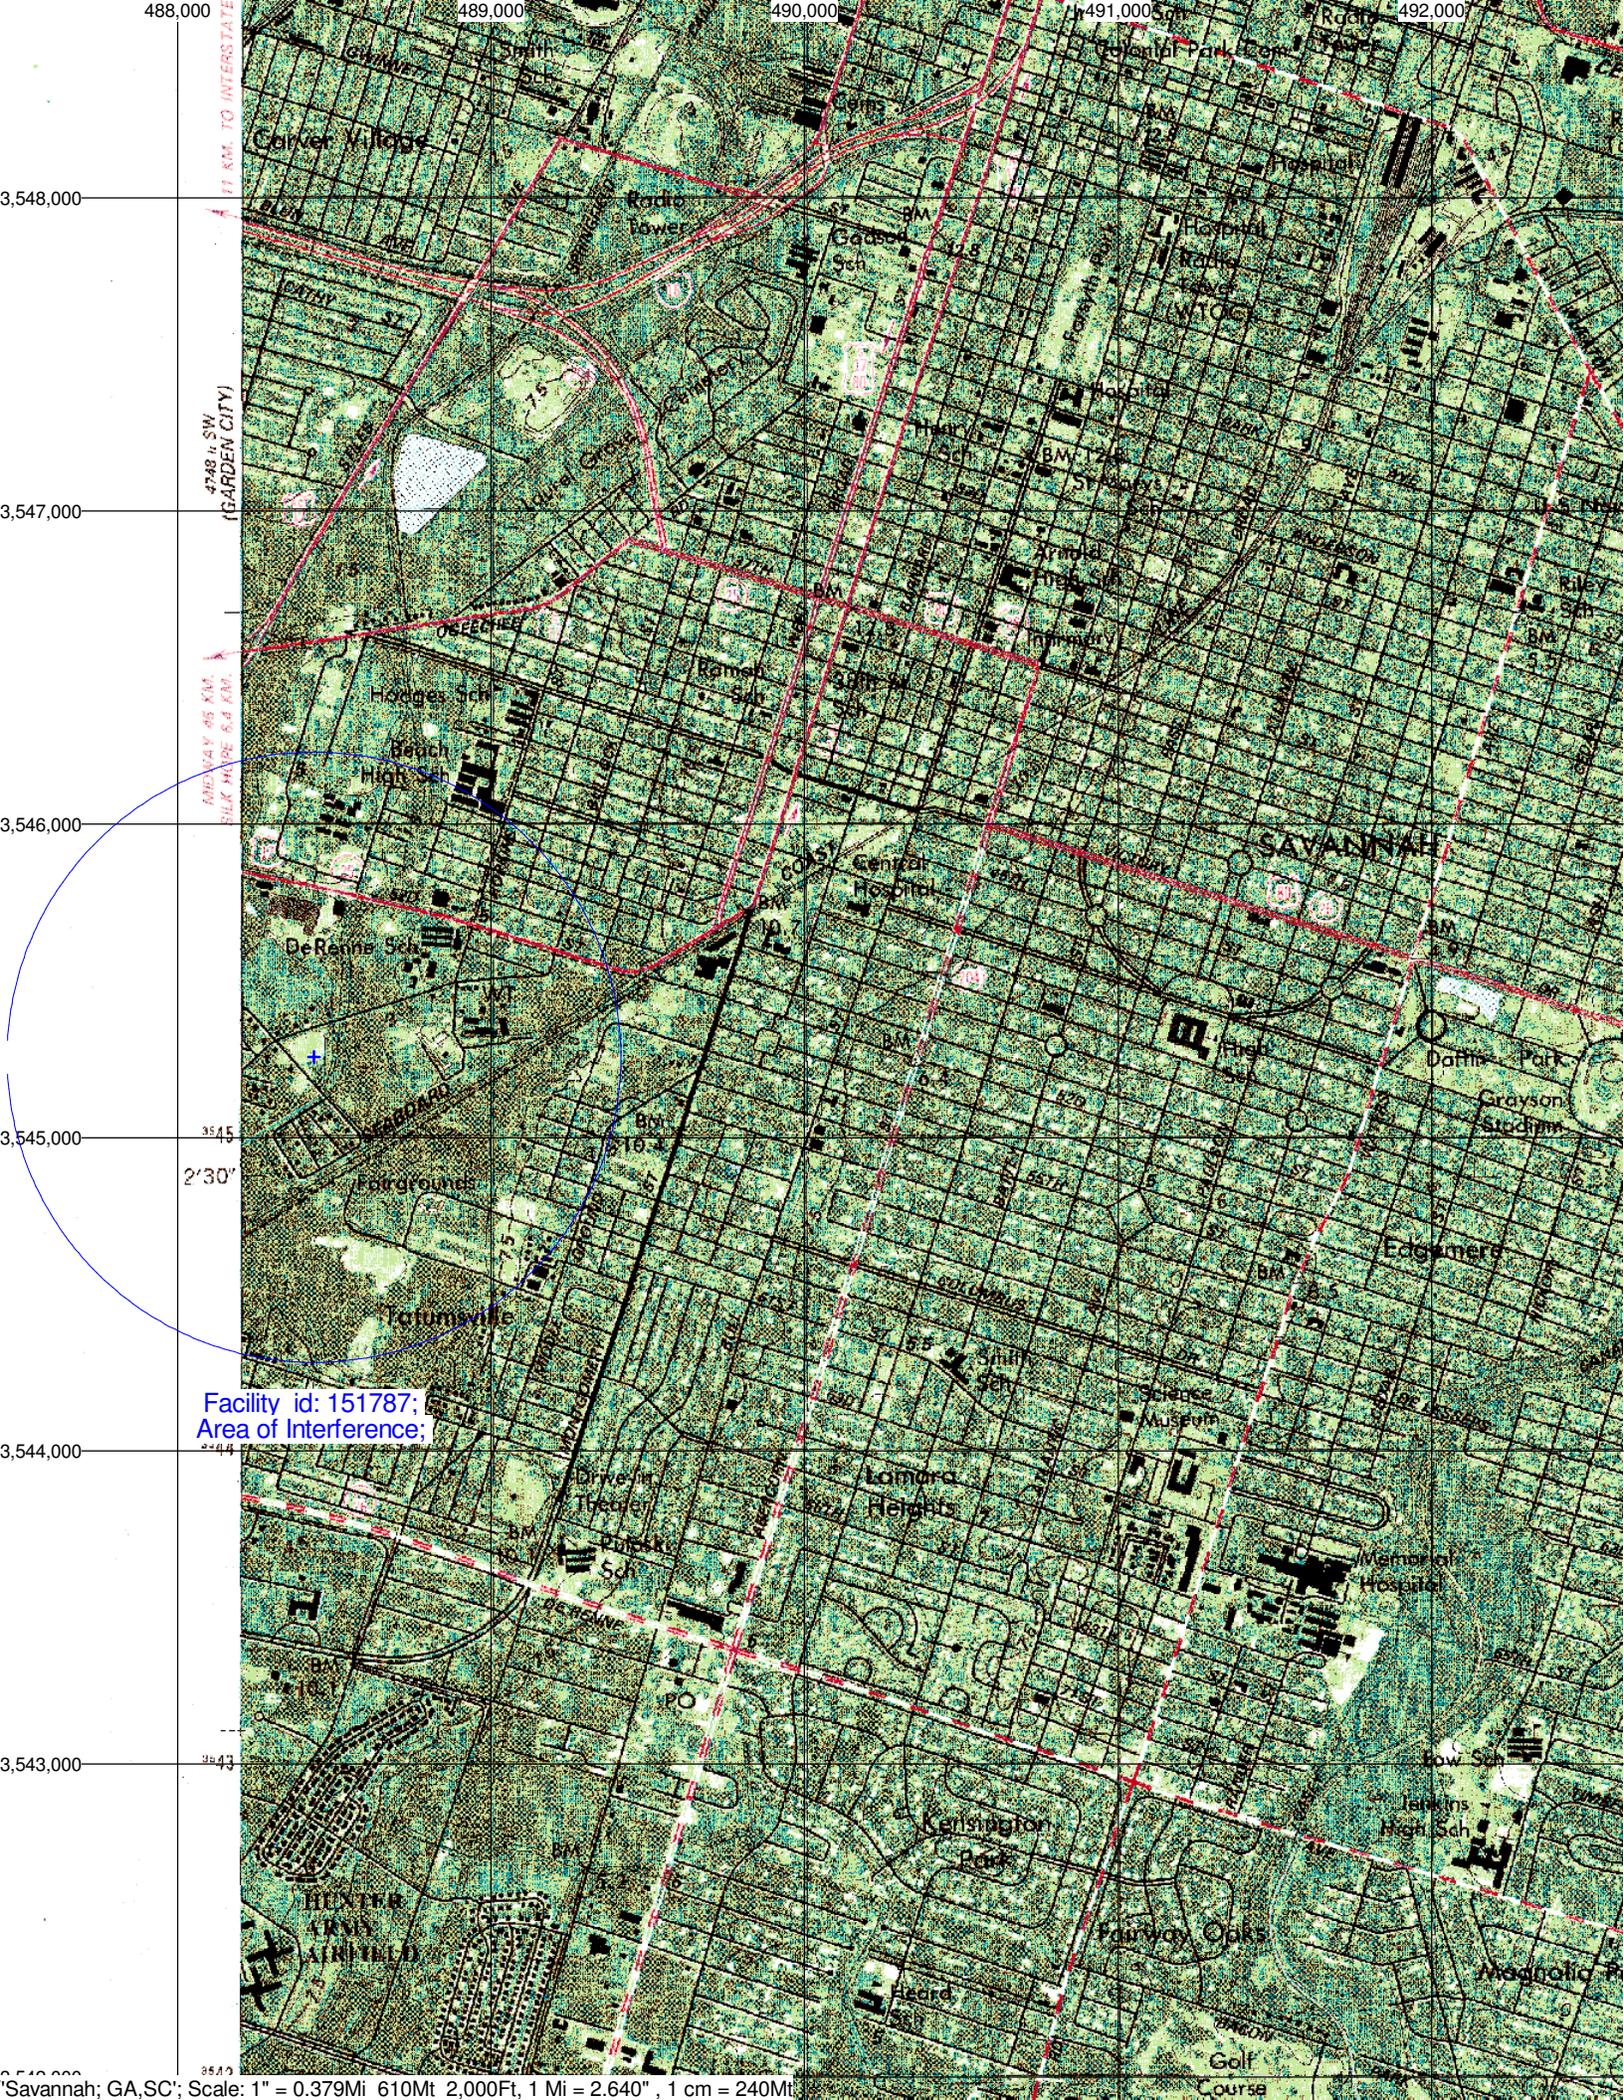

488.000
3,548,000
3,547,000
3,546,000
3,545,000
3,544,000
3,543,000
3,542,000

4748 ft. SW
(GARDEN CITY)

AREAS 141-05 KIL.
SILK HOPE 8.3 KIL.

3545
2'30"

Facility id: 151787;
Area of Interference;

