


73.525 Compliance

There are several considerations outlined in 47 C.F.R. 73.525 for TV channel 6 protection. Outlined below are the various factors as they apply to the proposed operation and the affected channel 6 stations KVIE-TV and KSBY-TV.

- 1. Distance between proposed operation, KVIE-TV, and KSBY-TV**
47 C.F.R. 73.525(a)(1) requires a minimum separation of 196 kilometers for a channel 209 operation. The distance between the proposed station and KVIE-TV is 168.20 kilometers. The distance between the proposed station and KSBY-TV is 172.65 kilometers.
- 2. Population Limitation**
When a proposed non-commercial station is not co-located with the channel 6 station in question, the applicant is required to show that the interference area (as predicted by the procedures outlined in 47 C.F.R. 73.525(e)(1)) contains no more than 3,000 persons.

The interfering contour of the proposed operation does not cross the Grade B contour of either KVIE-TV or KSBY-TV(see Exhibit 18-B), therefore there is no interference area.

For the reasons outlined above, the proposed operation fully complies with the provisions of 47 C.F.R. 73.525.

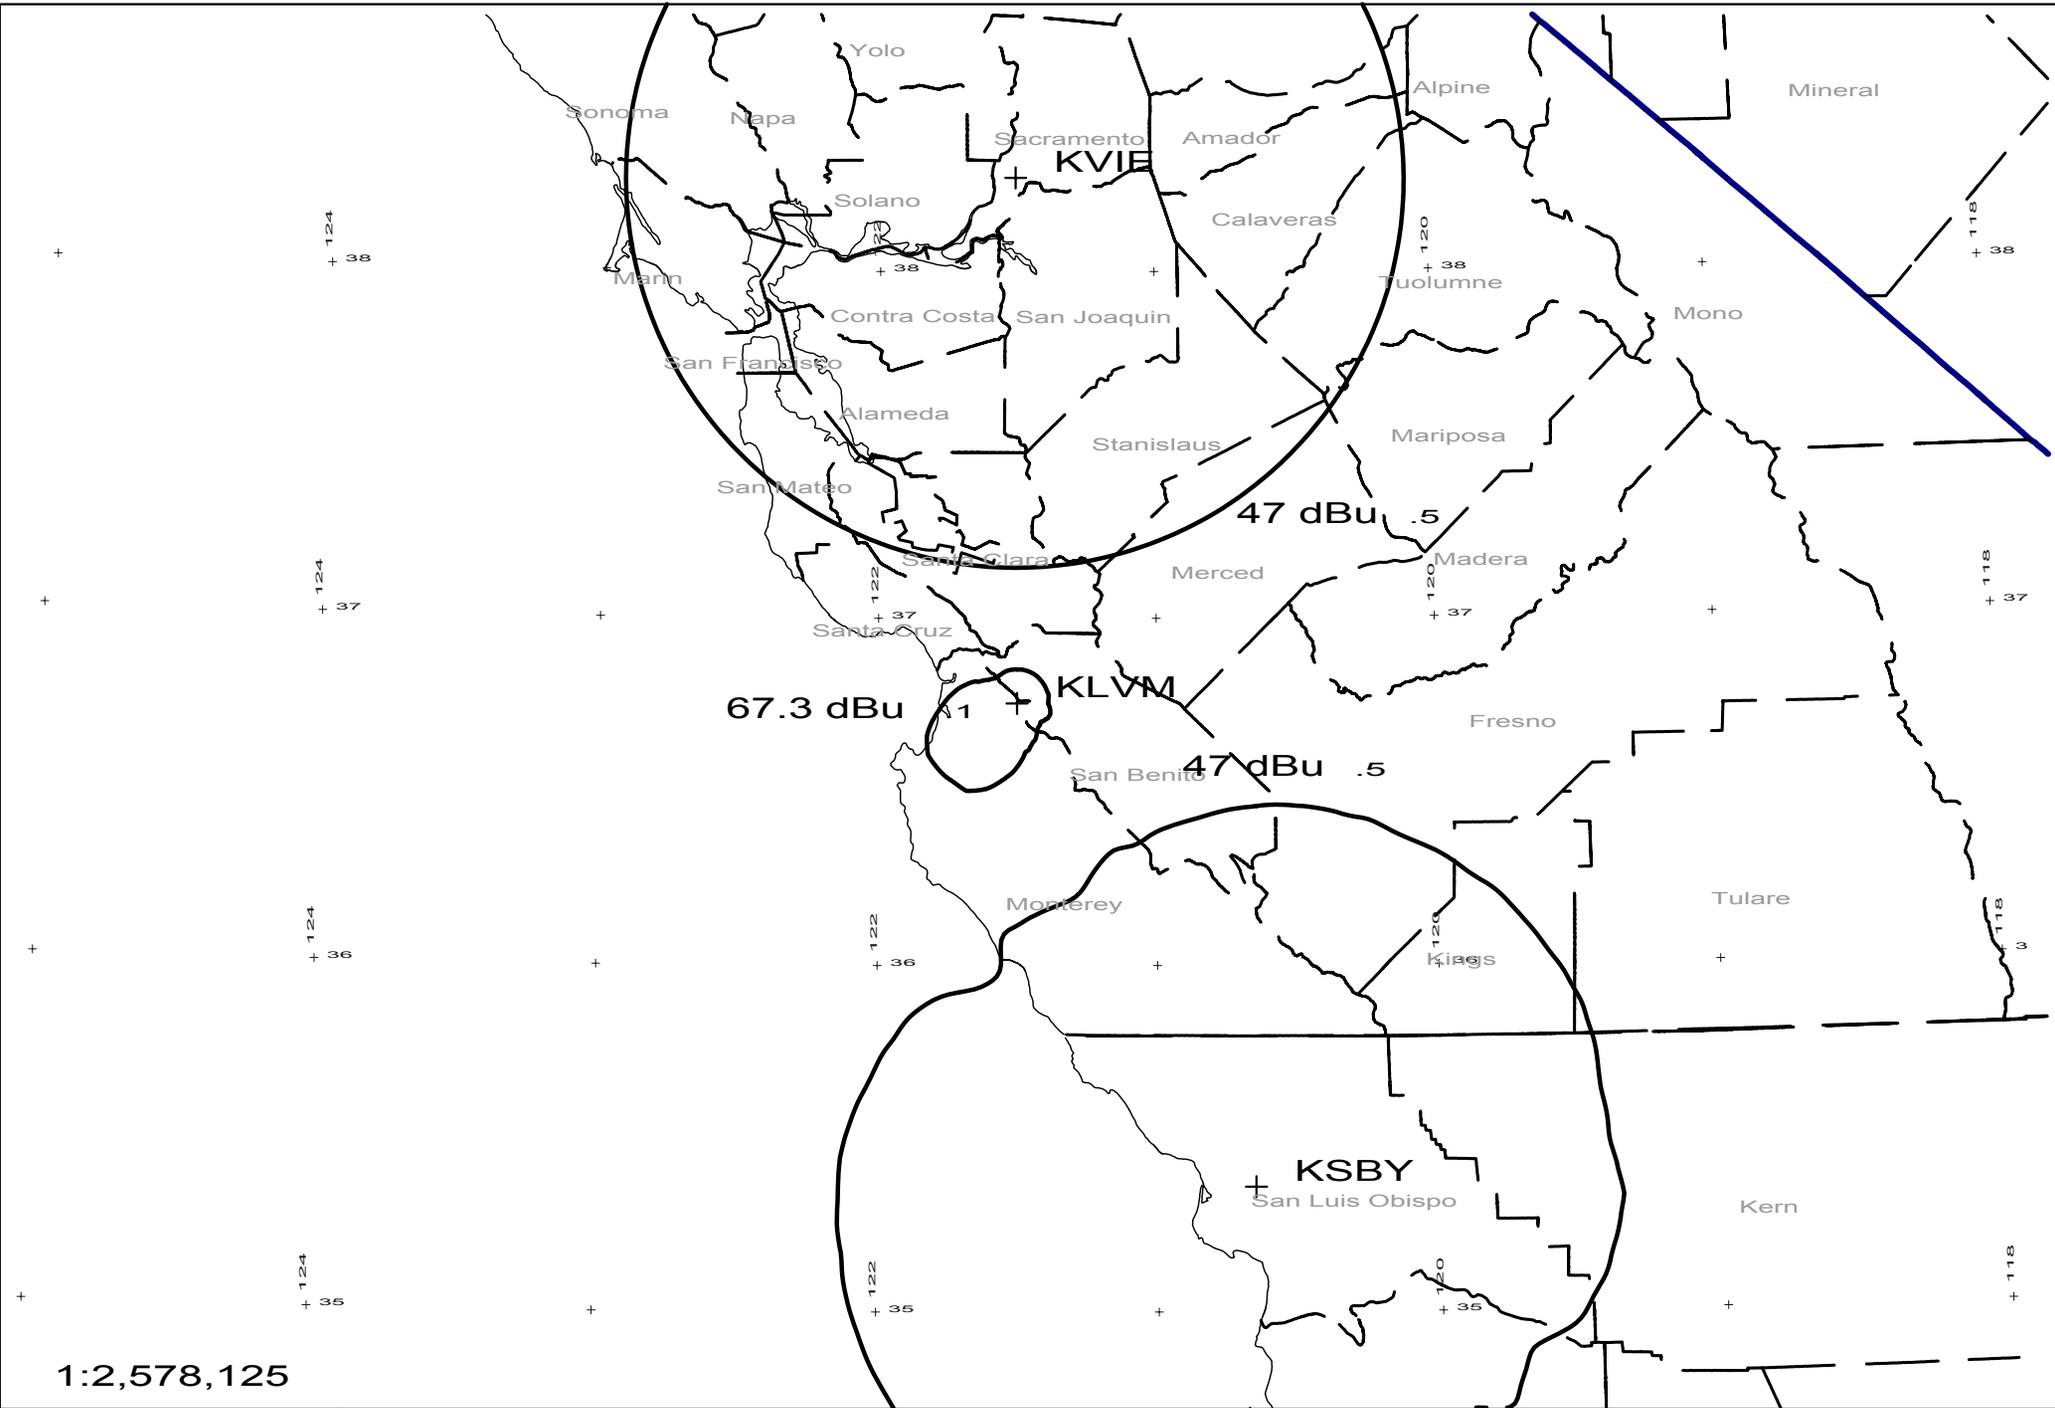

1:2,578,125



KLVM 209B .52kW 965M AMSL
N. Lat. 36 45 22 W. Lng. 121 30 05

Exhibit 18-B
EMF - 05/04