

MARCH 2008

EXHIBIT E-5.06


Page 1 of 2

PROPOSED KRCM
VOICE BROADCASTING, INC.
1380 kHz 10 kW DA-D
SHENANDOAH, TEXAS

FIELD STRENGTH MEASUREMENTS - DATA -
KRCM-CP Shenandoah, Texas, 1380 kHz, 0.25 kW ND

RADIAL 230 DEGREE

DISTANCE (km)	N-DA (mV/m)	TIME (CDT)	DATE YEAR: 2007
1.08	86	0840	6-13
1.41	65	0851	6-13
1.80	41	0905	6-14
1.93	47	0910	6-14
1.98	36	0914	6-14
2.37	32	0935	6-14
2.83	28	0930	6-14
3.41	18	1541	6-14
3.46	13	1512	6-14
4.17	10	1528	6-11
4.92	11	1534	6-11
5.99	7.7	1542	6-11
6.15	5.6	1550	6-11
6.60	6.1	1558	6-11
6.69	5.2	1606	6-11
6.90	4.8	1620	6-11
7.07	3.9	1628	6-11
7.42	4.4	1425	6-14
7.72	5.0	1415	6-14
7.89	3.5	1408	6-14
8.19	3.8	1402	6-14
8.38	3.8	1356	6-14
8.59	2.9	1353	6-14
9.03	3.2	1343	6-14
9.48	2.8	1329	6-14
10.04	2.7	1320	6-14
10.46	2.0	1315	6-14

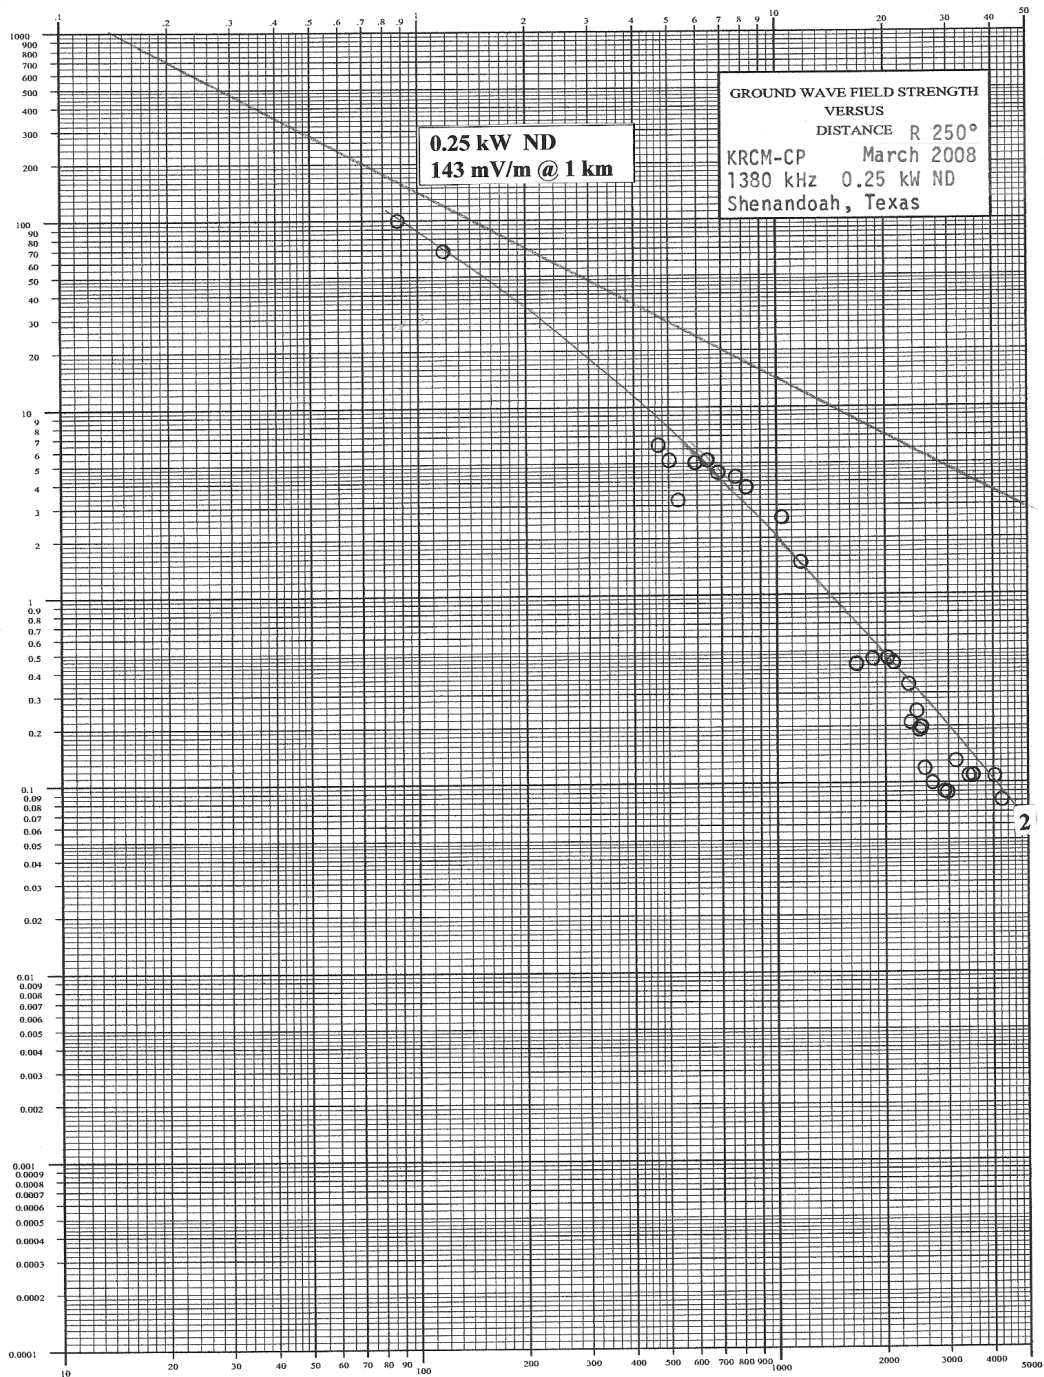

MARCH 2008


EXHIBIT E-5.07

PROPOSED KRCM
VOICE BROADCASTING, INC.
1380 kHz 10 kW DA-D
SHENANDOAH, TEXAS

FIELD STRENGTH MEASUREMENTS - DATA -
KRCM-CP Shenandoah, Texas, 1380 kHz, 0.25 kW ND

RADIAL 250 DEGREE

DISTANCE (km)	N-DA (mV/m)	TIME (CDT)	DATE YEAR: 2007
0.87	100	0851	6-14
1.19	68	1652	6-11
4.73	6.3	1537	6-11
5.05	5.2	1512	6-11
5.38	3.2	1000	6-14
5.95	5.0	1010	6-14
6.45	5.2	1201	6-14
6.89	4.5	1208	6-14
7.69	4.3	1211	6-14
8.14	3.7	1217	6-14
10.40	2.6	1224	6-14
11.80	1.5	1238	6-14
16.61	0.43	1105	6-15
18.60	0.46	1045	6-15
20.29	0.46	1032	6-15
21.07	0.44	1027	6-15
23.40	0.33	1022	6-15
23.83	0.21	1005	6-15
24.24	0.24	0956	6-15
24.66	0.19	0952	6-15
25.15	0.20	0944	6-15
25.78	0.12	0937	6-15
26.81	0.10	0931	6-15
29.29	0.090	0921	6-15
29.92	0.090	0915	6-15
31.70	0.13	0902	6-15
34.23	0.11	0852	6-15
35.70	0.11	0840	6-15
40.39	0.11	0833	6-15
42.16	0.080	0826	6-15

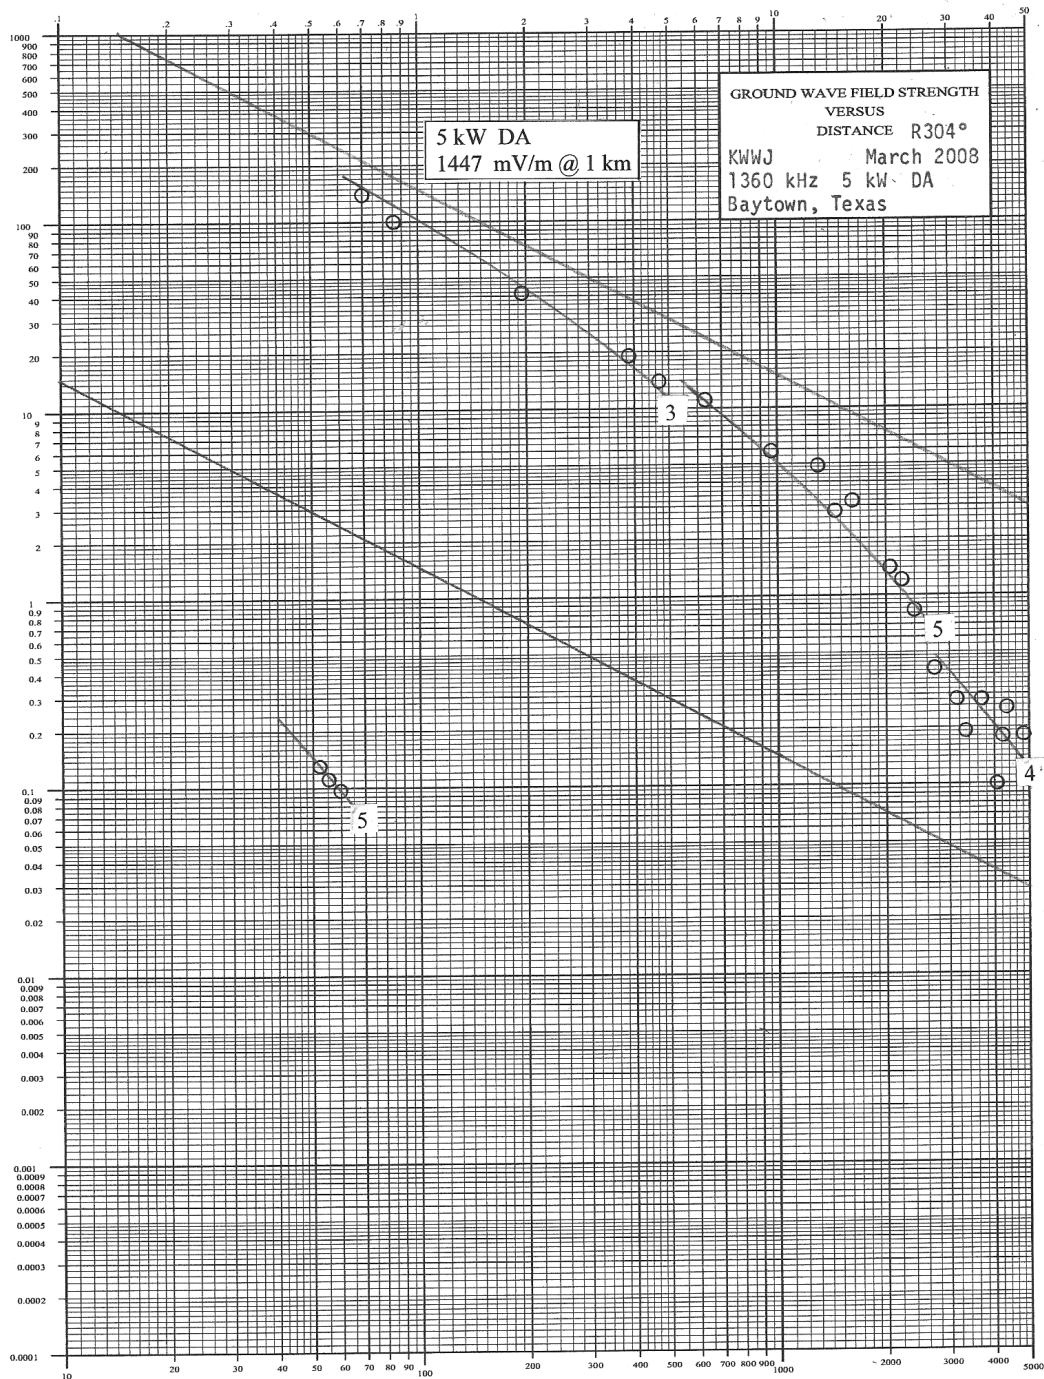

MARCH 2008


EXHIBIT E-5.08

PROPOSED KRCM
VOICE BROADCASTING, INC.
1380 kHz 10 kW DA-D
SHENANDOAH, TEXAS

FIELD STRENGTH MEASUREMENTS - DATA -
KWWJ Baytown, Texas, 1360 kHz, 5 kW DA

RADIAL 304 DEGREE

DISTANCE (km)	N-DA (mV/m)	TIME (CST)	DATE YEAR: 2004
0.70	1440	1731	6-12
0.86	1000	1728	6-12
1.96	420	1724	6-12
3.85	190	1715	6-12
4.72	140	1712	6-12
6.38	110	1707	6-12
9.64	59	1631	6-12
13.00	49	1623	6-12
14.50	28	1618	6-12
16.20	32	1613	6-12
20.60	14	1602	6-12
22.30	12	1556	6-12
24.00	8.4	1550	6-12
27.20	4.1	1542	6-12
31.90	2.8	1525	6-12
33.40	1.9	1515	6-12
37.00	2.8	1506	6-12
40.80	1.0	1437	6-12
42.40	1.8	1430	6-12
43.60	2.5	1419	6-12
48.00	1.8	1403	6-12
51.50	1.3	1346	6-12
55.00	1.1	1324	6-12
59.40	0.98	1314	6-12

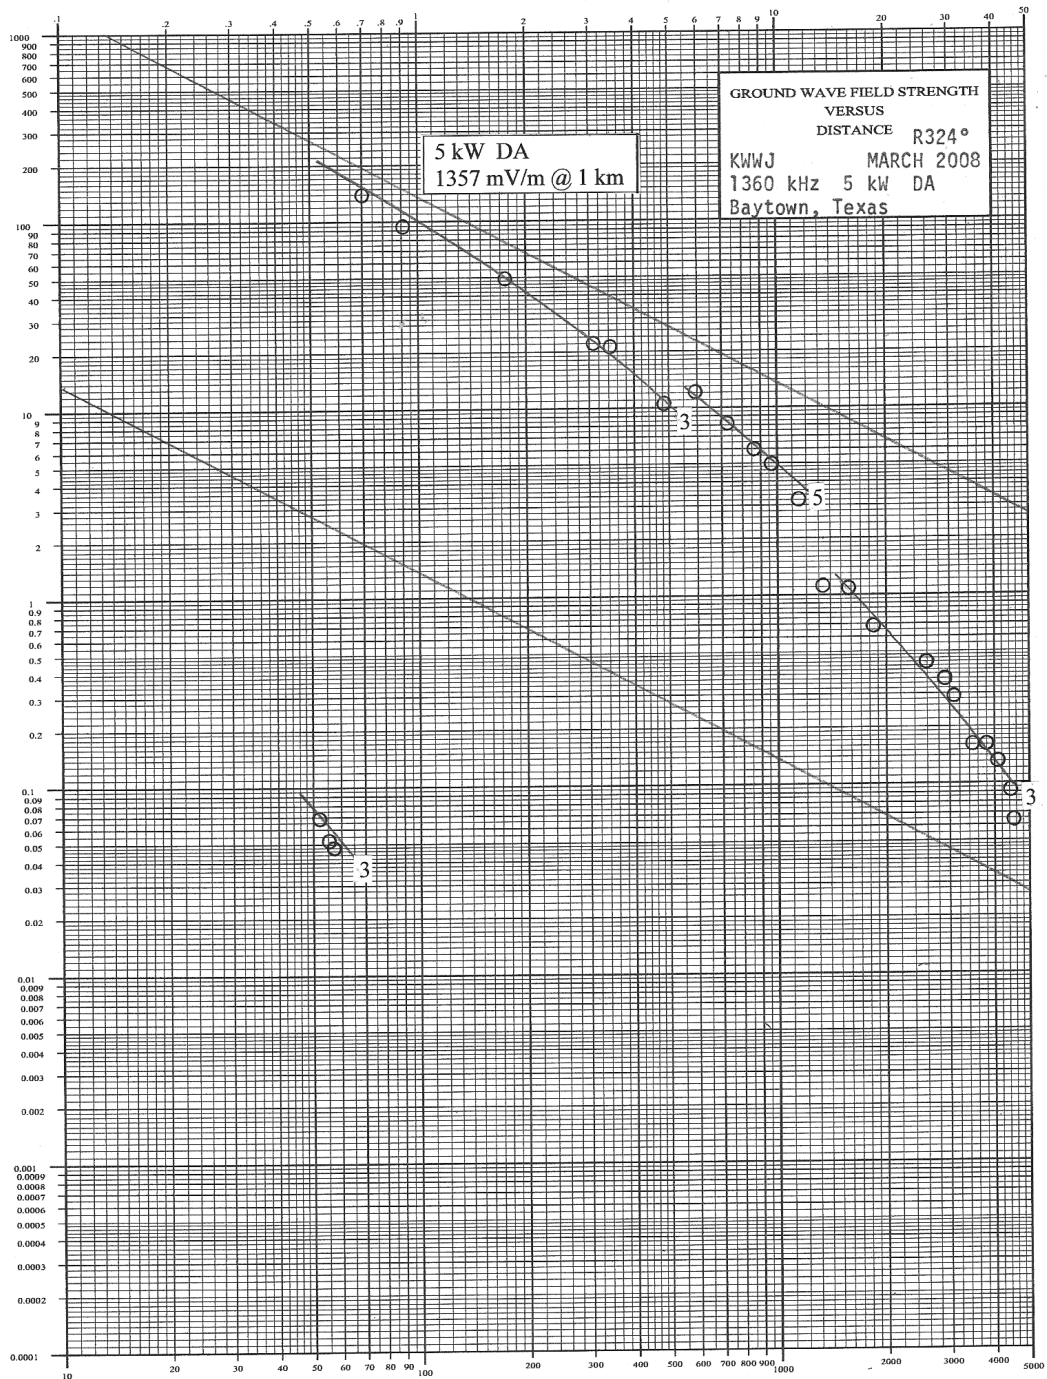

MARCH 2008

EXHIBIT E-5.09

PROPOSED KRCM
VOICE BROADCASTING, INC.
1380 kHz 10 kW DA-D
SHENANDOAH, TEXAS

FIELD STRENGTH MEASUREMENTS - DATA -
KWWJ Baytown, Texas, 1360 kHz, 5 kW DA

RADIAL 324 DEGREE

DISTANCE (km)	N-DA (mV/m)	TIME (CST)	DATE YEAR: 2004
0.50	1560	1035	6-11
0.72	1360	1038	6-11
0.74	890	1042	6-11
1.20	490	1046	6-11
2.98	230	1110	6-11
3.83	120	1129	6-11
5.20	140	1135	6-11
7.75	65	1150	6-11
12.30	34	1204	6-11
14.50	26	1212	6-11
16.90	16	1219	6-11
20.80	8.9	1227	6-11
22.60	14	1235	6-11
24.20	11	1243	6-11
26.90	5.4	1249	6-11
28.50	4.8	1254	6-11
32.60	2.5	1305	6-11
43.20	0.74	1327	6-11
46.70	0.77	1350	6-11
49.80	0.66	1409	6-11
52.60	0.66	1416	6-11
59.00	0.37	1530	6-11

MARCH 2008

EXHIBIT E-5.10

PROPOSED KRCM
VOICE BROADCASTING, INC.
1380 kHz 10 kW DA-D
SHENANDOAH, TEXAS

FIELD STRENGTH MEASUREMENTS - DATA -
KWWJ Baytown, Texas, 1360 kHz, 5 kW DA

RADIAL 344 DEGREE

DISTANCE (km)	N-DA (mV/m)	TIME (CDT)	DATE YEAR: 2004
0.70	1400	0908	12- 5
0.92	940	0913	12- 5
1.77	490	1319	12- 5
3.08	210	1324	12- 5
3.41	208	1339	12- 5
4.83	108	1346	12- 5
5.90	120	1354	12- 5
7.25	82	1359	12- 5
8.60	60	1404	12- 5
9.73	52	1411	12- 5
11.50	32	1423	12- 5
13.30	11	1439	12- 5
15.80	11	1451	12- 5
18.50	6.8	1505	12- 5
26.00	4.4	1535	12- 5
29.30	3.6	1411	12- 7
31.10	2.9	1419	12- 7
34.90	1.6	1440	12- 7
38.10	1.6	1450	12- 7
41.10	1.3	1511	12- 7
44.40	0.90	1518	12- 7
45.70	0.64	1524	12- 7
52.80	0.69	1544	12- 7
55.30	0.52	1559	12- 7
56.70	0.47	1606	12- 7

Proposed Night Limits

KRCM-N 1380 kHz to Co-Channel Stations: 1380 kHz

*** Facilities/Points with Proposed Limits less than .5 mV/m are NOT printed

=====


==

Facility Required or Contour Protect	Location	Dist km	Azim deg	Theta deg	Max IDF mV/m/km	Skywave uV/m	Limit mV/m
---	----------	------------	-------------	--------------	--------------------	-----------------	---------------


=====

==


BOSSIER-A	32-39-08N 93-45-17W	313.7	29.3	30.7	30.7	27.8	168.0	0.933	9.552
BERNALI-A	35-27-21N 106-24-19W	1182.6	302.4	6.5	6.5	77.2	47.3	0.731	2.807
KMUS-L	36-15-59N 95-58-15W	677.2	355.6	10.5	17.9	56.1	81.4	0.913	1.961
XEKT-P	32-31-45N 116-41-32W	677.2	355.6	10.5	17.9	56.1	81.4	0.913	3.191
KDXE-L	34-52-49N 92-14-01W	599.0	28.9	12.2	20.4	30.0	96.4	0.579	3.060
KXCA-L	34-35-24N 98-21-44W	562.6	330.9	13.1	21.7	84.1	104.9	1.764	2.299
KBWD-L	31-42-36N 98-57-36W	379.7	297.1	19.9	31.3	67.6	167.4	2.262	2.280
KFNI-L	29-00-00N 98-31-50W	331.4	247.2	22.7	35.0	28.5	193.4	1.102	3.190

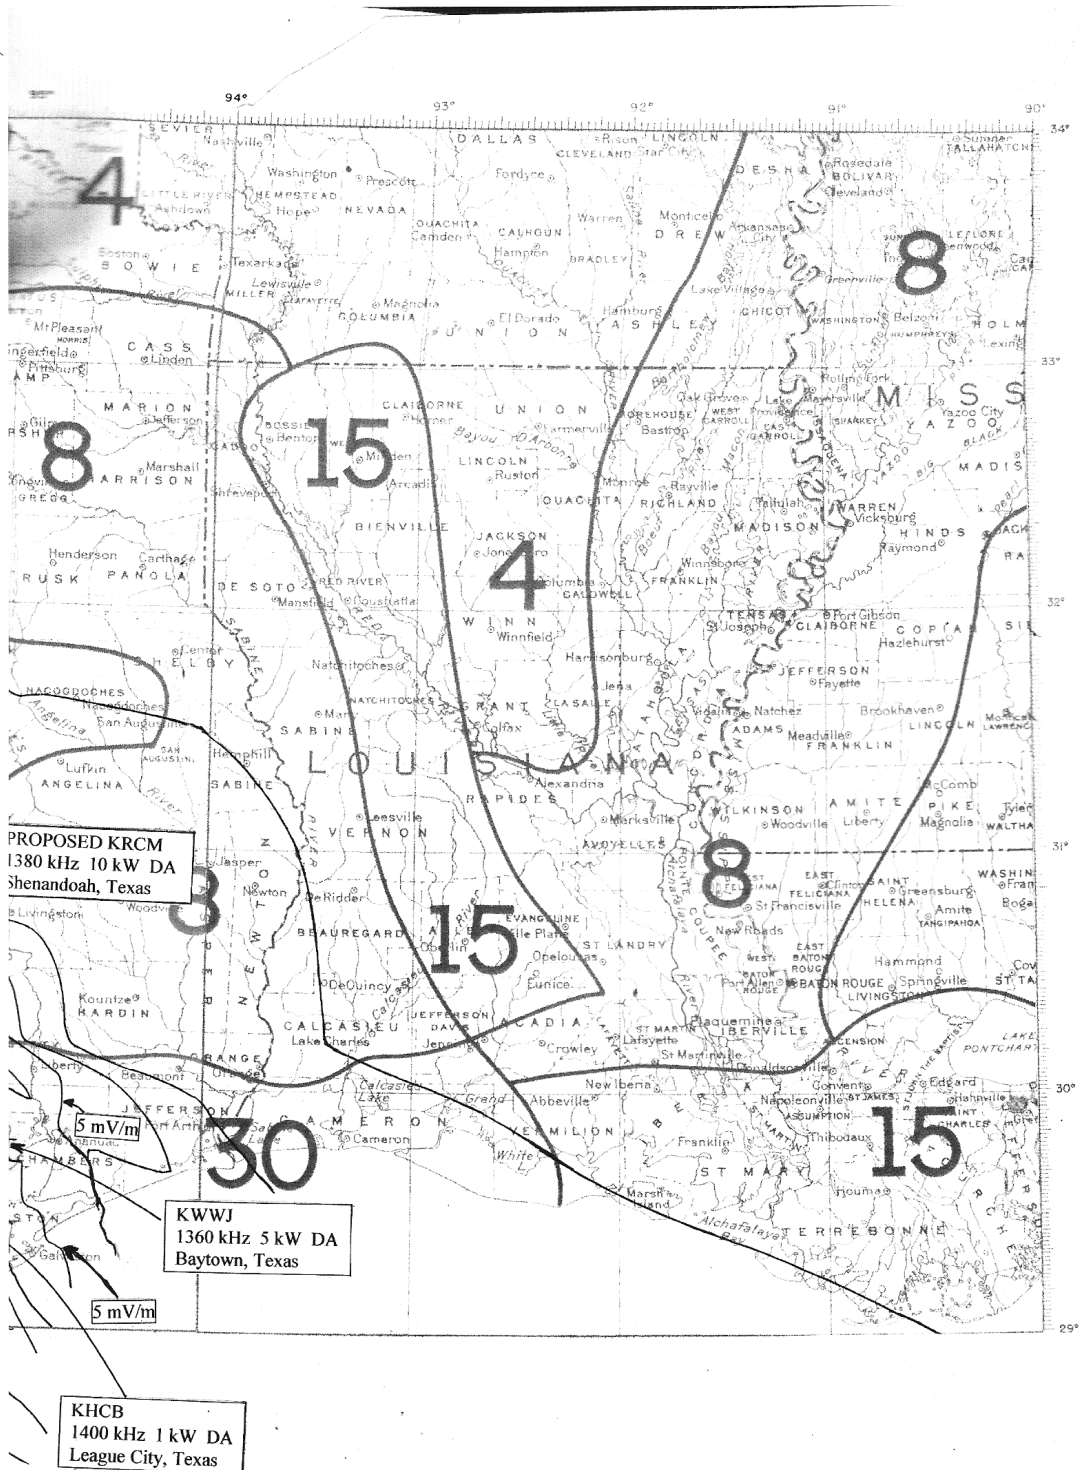

GROUND SYSTEM

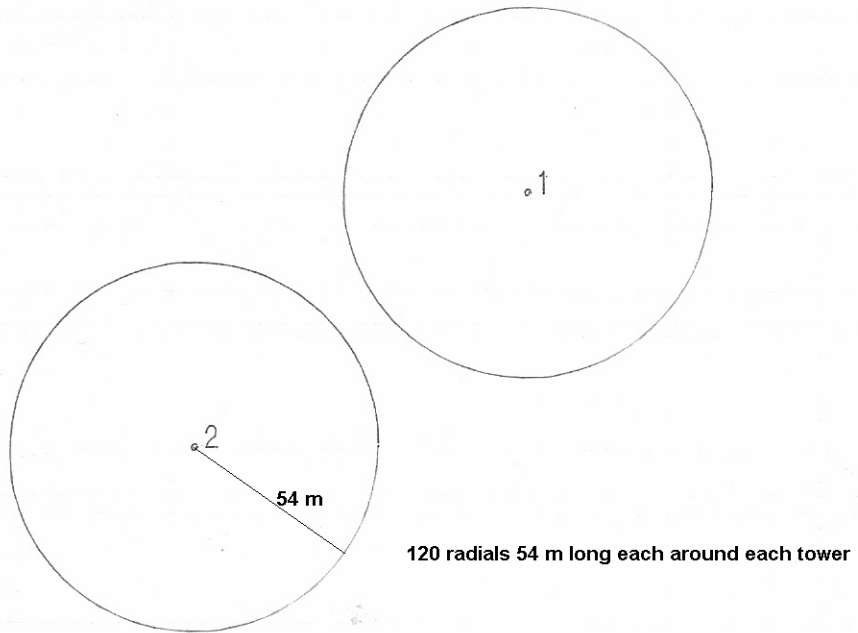

TOWER VERTICAL DIAGRAM

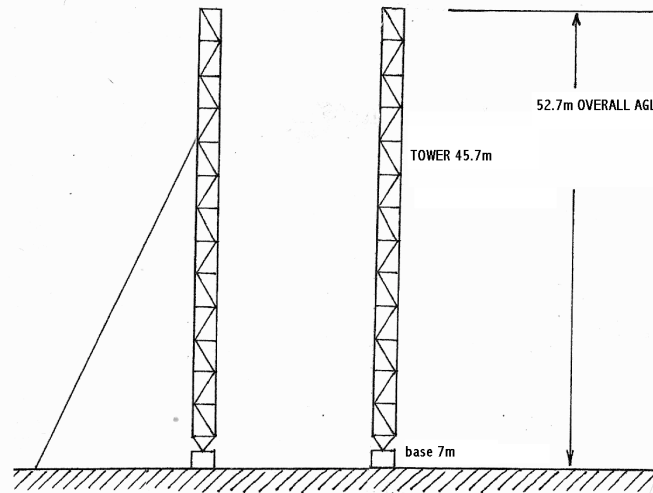

Vir James Engineers

Project: KRCM

Page 1

Source Coordinates: 30-11-42 North 95-23-25 West

This program uses the 2000 US Census Database: PL 94-171

Block level centroid retrieval methodology

Distance to the Contours are interpolated between Azimuths

CONTOUR OF STUDY is 1000.0 mV/m.

SUMMARY: Population : 0
Area within Contour by Sectoring: 2 sq. km
Land Area in Contour from Census: 0.0 sq. km

