


ERI/JAMPRO JBCP "Roto" EPA-Typ 3, 8 Bays, Spac= 1, H=16.5 kW, V=16.5 kW, 21.8 M AG

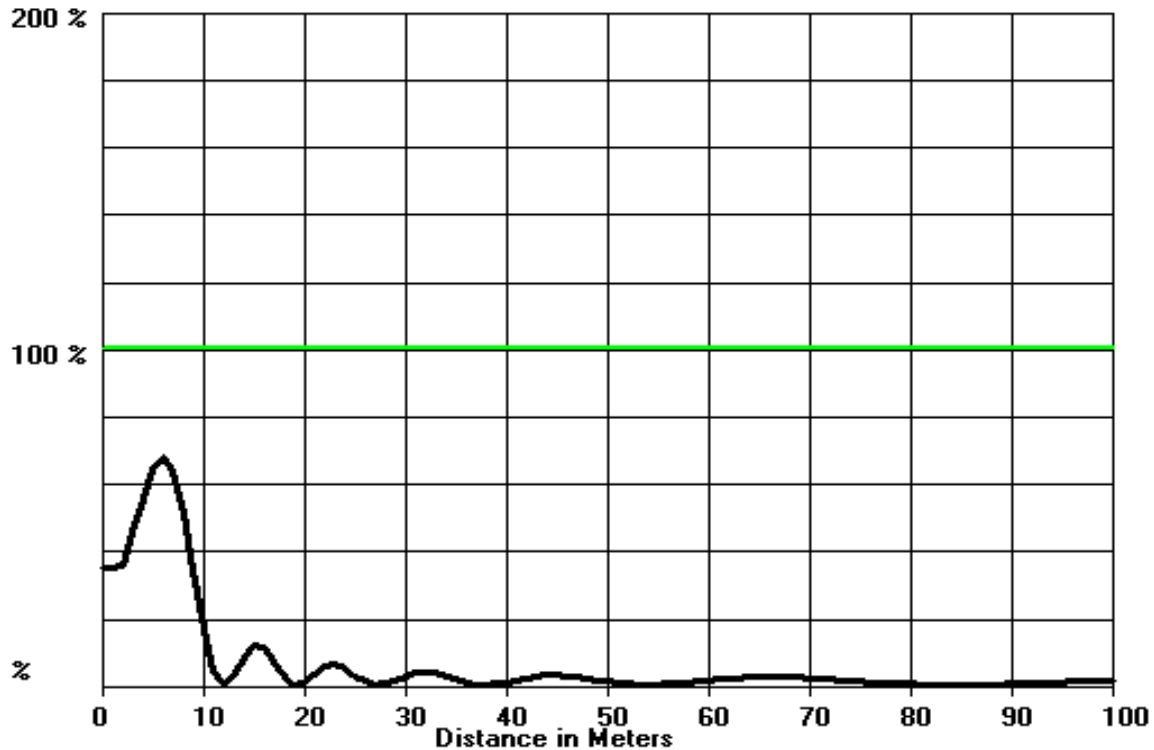

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)
 Dist(Meters) PD (H) PD (V) Total(uW/cm2) Percent Max.(200)

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.(200)
0	34.80	34.80	69.59	34.8
1	34.72	34.72	69.43	34.7
2	35.36	35.36	70.71	35.4
3	45.52	45.52	91.04	45.5
4	55.96	54.60	110.55	55.3
5	69.28	59.01	128.29	64.1
6	75.56	59.68	135.24	67.6
7	67.72	58.20	125.92	63.0
8	52.90	48.66	101.56	50.8
9	34.64	33.25	67.90	33.9
10	16.74	16.65	33.39	16.7
11	4.53	4.37	8.90	4.5
12	0.01	0.01	0.03	0.0
13	2.75	2.49	5.24	2.6
14	8.69	7.74	16.43	8.2
15	12.75	11.20	23.95	12.0
16	11.92	10.35	22.27	11.1
17	7.38	6.35	13.73	6.9
18	2.50	2.13	4.62	2.3
19	0.08	0.07	0.15	0.1
20	0.86	0.70	1.55	0.8
21	3.51	2.79	6.30	3.1
22	5.90	4.63	10.53	5.3
23	6.44	5.18	11.61	5.8
24	5.12	4.22	9.34	4.7
25	2.89	2.43	5.33	2.7

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
26	0.94	0.80	1.74	0.9
27	0.03	0.03	0.06	0.0
28	0.32	0.29	0.61	0.3
29	1.42	1.30	2.72	1.4
30	2.69	2.51	5.20	2.6
31	3.59	3.41	7.01	3.5
32	3.78	3.69	7.47	3.7
33	3.31	3.31	6.62	3.3
34	2.43	2.48	4.91	2.5
35	1.43	1.50	2.93	1.5
36	0.60	0.64	1.24	0.6
37	0.11	0.12	0.23	0.1
38	0.01	0.01	0.02	0.0
39	0.25	0.29	0.54	0.3
40	0.73	0.84	1.57	0.8
41	1.31	1.53	2.84	1.4
42	1.85	2.19	4.04	2.0
43	2.27	2.72	4.98	2.5
44	2.49	3.02	5.51	2.8
45	2.51	3.08	5.59	2.8
46	2.34	2.91	5.24	2.6
47	2.03	2.54	4.56	2.3
48	1.63	2.02	3.66	1.8
49	1.21	1.48	2.69	1.3
50	0.80	0.97	1.77	0.9
51	0.45	0.54	0.99	0.5
52	0.19	0.23	0.42	0.2
53	0.04	0.05	0.09	0.0
54	0.00	0.00	0.00	0.0
55	0.06	0.07	0.13	0.1
56	0.21	0.24	0.45	0.2
57	0.42	0.48	0.90	0.5
58	0.68	0.77	1.45	0.7
59	0.96	1.08	2.04	1.0
60	1.24	1.39	2.62	1.3
61	1.49	1.68	3.17	1.6
62	1.72	1.93	3.65	1.8
63	1.90	2.13	4.03	2.0
64	2.04	2.28	4.31	2.2
65	2.12	2.36	4.48	2.2
66	2.15	2.39	4.54	2.3
67	2.13	2.37	4.50	2.2
68	2.06	2.29	4.35	2.2
69	1.96	2.18	4.13	2.1
70	1.82	2.02	3.84	1.9
71	1.66	1.84	3.51	1.8
72	1.49	1.65	3.13	1.6
73	1.30	1.44	2.74	1.4
74	1.11	1.23	2.34	1.2
75	0.93	1.03	1.96	1.0
76	0.75	0.83	1.58	0.8
77	0.59	0.65	1.24	0.6

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
78	0.44	0.49	0.93	0.5
79	0.32	0.35	0.66	0.3
80	0.21	0.23	0.44	0.2
81	0.12	0.14	0.26	0.1
82	0.06	0.07	0.13	0.1
83	0.02	0.02	0.04	0.0
84	0.00	0.00	0.00	0.0
85	0.00	0.00	0.01	0.0
86	0.02	0.03	0.05	0.0
87	0.06	0.07	0.13	0.1
88	0.11	0.12	0.24	0.1
89	0.18	0.20	0.38	0.2
90	0.26	0.28	0.54	0.3
91	0.34	0.38	0.72	0.4
92	0.44	0.48	0.92	0.5
93	0.54	0.59	1.12	0.6
94	0.64	0.70	1.34	0.7
95	0.74	0.82	1.56	0.8
96	0.85	0.93	1.78	0.9
97	0.95	1.05	2.00	1.0
98	1.06	1.16	2.22	1.1
99	1.16	1.27	2.43	1.2
100	1.25	1.38	2.63	1.3