

Exhibit 32.1

COMPLIANCE WITH RADIOFREQUENCY RADIATION GUIDELINES


The RF Compliance Study for the proposed WTAQ-FM - Glenmore, WI facility on Channel 248A has been evaluated for human exposure to non-ionizing radiofrequency radiation at the transmitter site. The site will house only the proposed operation. The potential for human exposure to non-ionizing radiofrequency radiation at the proposed transmitter site has been evaluated with regards to the §1.1307(b)(3), five percent (5%) contribution rule, as this site was designed for multiple transmission operations.

WTAQ-FM will operate on CH248A, 97.5 MHz with a maximum effective radiated power (ERP) of 3.0 kW with circular polarization. The facility will operate with a two bay ERI LPX-2E antenna mounted 91.5 meters above ground level (AGL). The spacing for the two elements will be 1.0 λ (wavelengths). For this study, EPA type 3 elements as defined by FCC program FM Model Version 2.10b¹ have been assumed.

To evaluate the total exposure to non-ionizing radio-frequency radiation with regards to the five percent contribution exclusion rule, it is necessary to establish 5.0% of the maximum permissible limit. 5.0% of the 200 $\mu\text{W}/\text{cm}^2$ results in 10 $\mu\text{W}/\text{cm}^2$. Therefore if the resulting contribution is less than or equal to 10 $\mu\text{W}/\text{cm}^2$ or 5.0%, the exposure is concluded to be within the guidelines of OET Bulletin No. 65 (Edition 97-01) and §1.1307(b)(3). Protection of the more restrictive uncontrolled limit implies protection of the controlled limit.

Inspection of the graph below indicates the maximum contribution for the uncontrolled environment is less than the 10 $\mu\text{W}/\text{cm}^2$ (5.0%) limit as set forth by §1.1307(b)(3), therefore the facility is in compliance with FCC guidelines. §1.1307(b)(3) states that facilities contributing less than five percent of the exposure limit at locations with multiple transmitters are categorically excluded from responsibility for taking any corrective action in the areas where its contribution is less than five percent. Since this instant application meets the five percent exclusion test at all ground level areas, the impact of the proposed facility may be considered independently from other facilities operating at or nearby this site. It is believed the impact of the proposed operation should not be considered to be a factor at ground level as defined under §1.1307(b)(3).

In addition to the protection afforded by the proposed antenna height above ground, the facility is or will be properly marked with signs, and entry to the facility will be restricted by means of fencing with locked doors and/or gates if required. Any other means that may be required to protect employees and the general public will also be employed. In the event work is required in proximity to the antenna(s) such that the person or persons working in the area will be potentially exposed to fields in excess of the current guidelines, an agreement signed by all broadcast parties at the site will be in effect for the offending transmitter(s) to reduce power, or cease operation during the critical period.

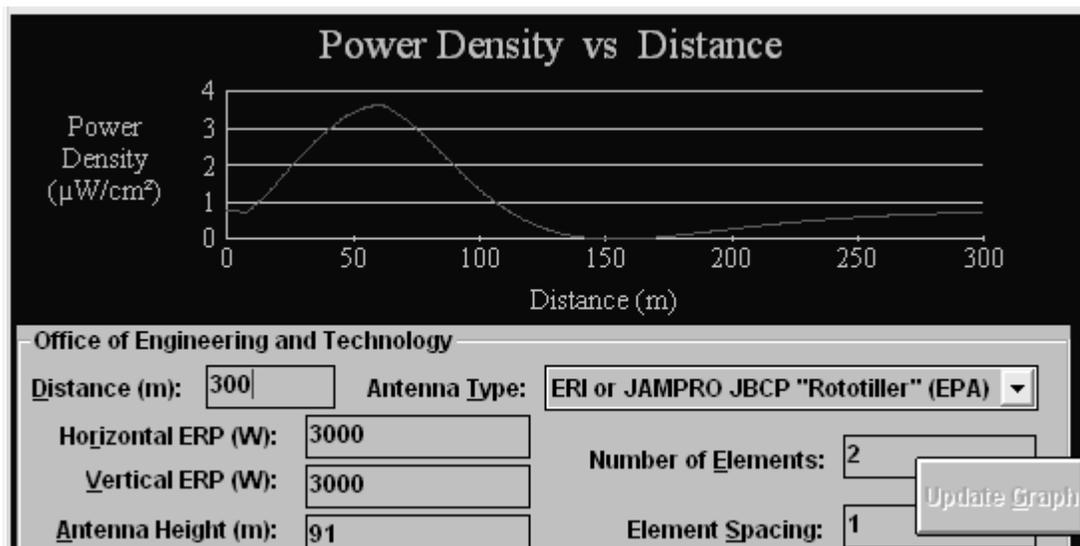

The Max Power Density was found to be 3.63438464592715 $\mu\text{W}/\text{cm}^2$ at 60 meters.

Note: Graph resolution is 500 points.

1. FM Model Version 2.1b employs the standards as detailed in OET Bulletin No. 65 (Edition 97-01). FM radiofrequency radiation levels have been predicted using both the array pattern, the calculations of which are based on the number of bays in the antenna and wavelength spacing between the bays, and the element pattern. The element pattern has been determined by using measured element data prepared by the EPA and published in "An Engineering Assessment of the Potential Impact of Federal Radiation Protection Guidance on the AM, FM and TV Services," by Paul C. Gailey and Richard Tell - April 1985, U.S. Environmental Protection Agency.