



Proposal Number	C-00780
Date	14-Dec-06
Call Letters	KCJK
Location	Kansas City, MO
Customer	Cumulus
Antenna Type	DCRM6ERP
Drawing #	

ELEVATION PATTERN

RMS Gain at Main Lobe **1.90 (2.79 dB)**
Per Polarization
Calculated / Measured **Calculated**

Beam Tilt **0.00 deg**
Frequency **105.10 MHz**

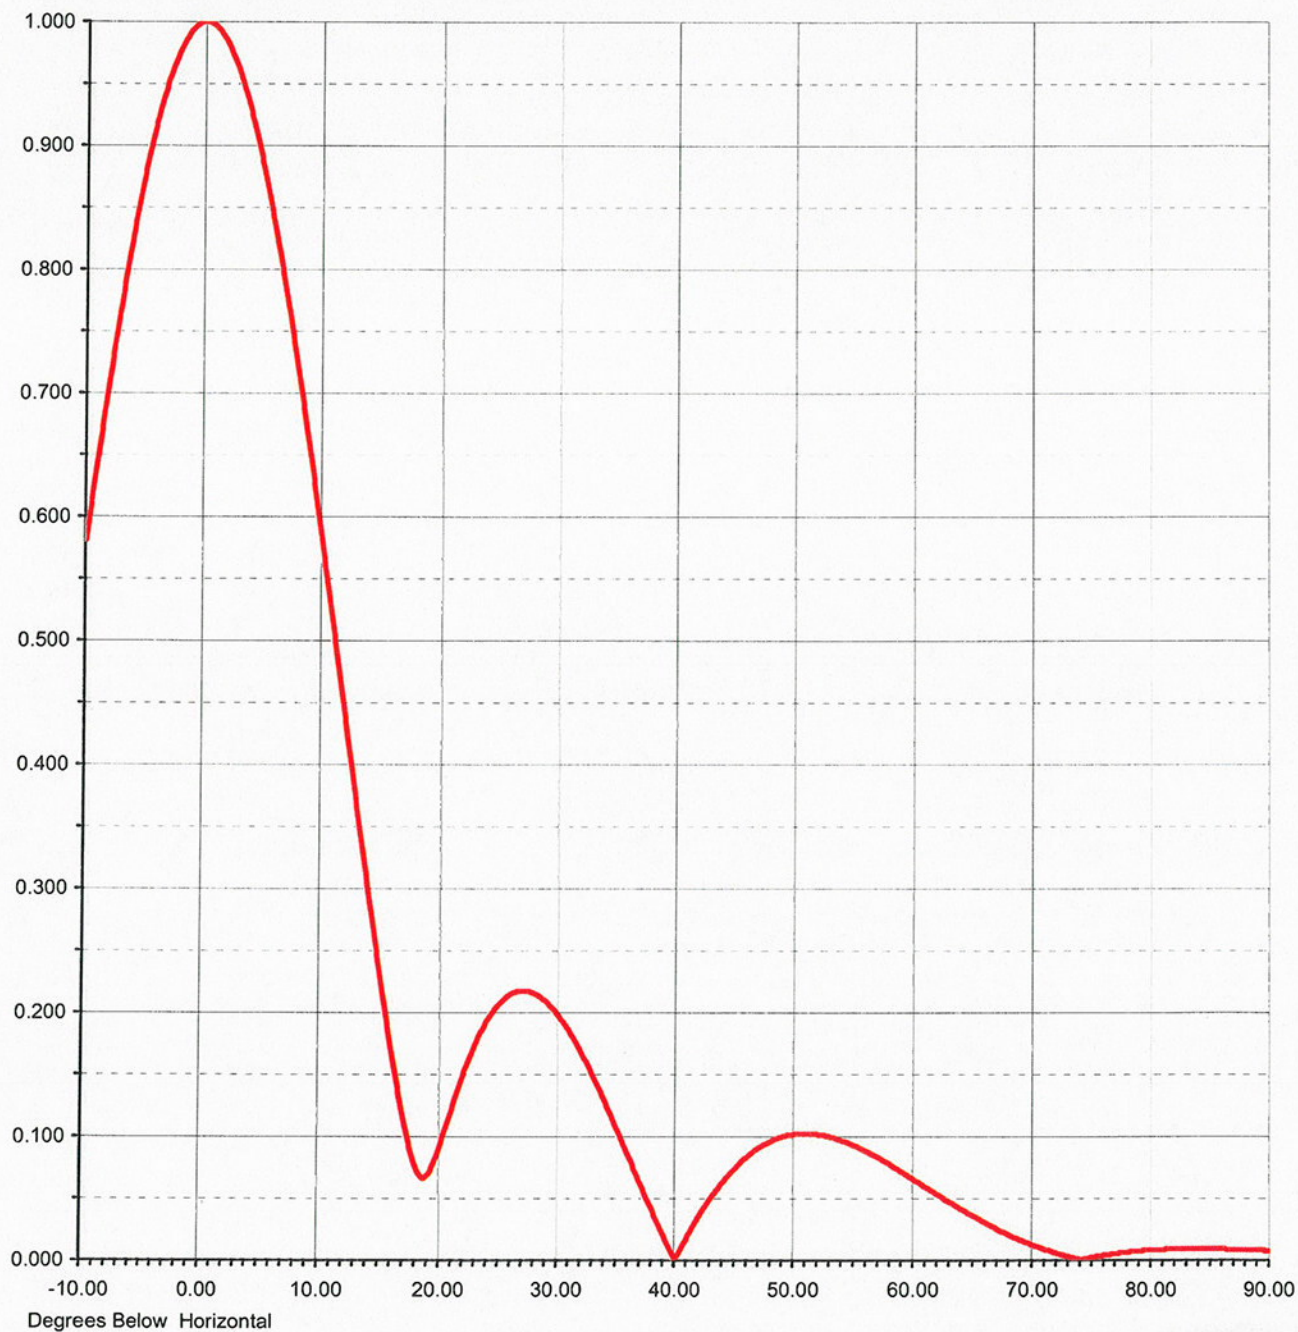


EXHIBIT C



Proposal Number **C-00780**
 Date **14-Dec-06**
 Call Letters **KCJK**
 Location **Kansas City, MO**
 Customer **Cumulus**
 Antenna Type **DCRM6ERP**
 Frequency **105.10 MHz**

1

TABULATION OF ELEVATION PATTERN

Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field
-10.0	0.581	10.5	0.546	31.0	0.183	51.5	0.102	72.0	0.005
-9.5	0.616	11.0	0.510	31.5	0.175	52.0	0.101	72.5	0.004
-9.0	0.650	11.5	0.474	32.0	0.166	52.5	0.101	73.0	0.003
-8.5	0.684	12.0	0.438	32.5	0.157	53.0	0.099	73.5	0.001
-8.0	0.716	12.5	0.402	33.0	0.147	53.5	0.098	74.0	0.000
-7.5	0.747	13.0	0.366	33.5	0.137	54.0	0.096	74.5	0.001
-7.0	0.777	13.5	0.331	34.0	0.127	54.5	0.095	75.0	0.002
-6.5	0.806	14.0	0.296	34.5	0.116	55.0	0.092	75.5	0.003
-6.0	0.833	14.5	0.262	35.0	0.105	55.5	0.090	76.0	0.004
-5.5	0.858	15.0	0.229	35.5	0.094	56.0	0.088	76.5	0.004
-5.0	0.882	15.5	0.197	36.0	0.083	56.5	0.085	77.0	0.005
-4.5	0.904	16.0	0.167	36.5	0.072	57.0	0.083	77.5	0.006
-4.0	0.923	16.5	0.139	37.0	0.061	57.5	0.080	78.0	0.006
-3.5	0.941	17.0	0.113	37.5	0.050	58.0	0.077	78.5	0.007
-3.0	0.956	17.5	0.091	38.0	0.040	58.5	0.074	79.0	0.007
-2.5	0.970	18.0	0.075	38.5	0.029	59.0	0.071	79.5	0.008
-2.0	0.980	18.5	0.067	39.0	0.019	59.5	0.068	80.0	0.008
-1.5	0.989	19.0	0.069	39.5	0.009	60.0	0.065	80.5	0.008
-1.0	0.995	19.5	0.078	40.0	0.001	60.5	0.062	81.0	0.008
-0.5	0.999	20.0	0.092	40.5	0.010	61.0	0.059	81.5	0.009
0.0	1.000	20.5	0.107	41.0	0.019	61.5	0.056	82.0	0.009
0.5	0.999	21.0	0.122	41.5	0.027	62.0	0.053	82.5	0.009
1.0	0.995	21.5	0.137	42.0	0.035	62.5	0.050	83.0	0.009
1.5	0.989	22.0	0.151	42.5	0.043	63.0	0.047	83.5	0.009
2.0	0.980	22.5	0.164	43.0	0.050	63.5	0.044	84.0	0.009
2.5	0.970	23.0	0.175	43.5	0.057	64.0	0.041	84.5	0.009
3.0	0.956	23.5	0.185	44.0	0.063	64.5	0.038	85.0	0.009
3.5	0.941	24.0	0.194	44.5	0.069	65.0	0.035	85.5	0.009
4.0	0.923	24.5	0.202	45.0	0.074	65.5	0.033	86.0	0.009
4.5	0.904	25.0	0.207	45.5	0.079	66.0	0.030	86.5	0.008
5.0	0.882	25.5	0.212	46.0	0.083	66.5	0.027	87.0	0.008
5.5	0.858	26.0	0.215	46.5	0.087	67.0	0.025	87.5	0.008
6.0	0.833	26.5	0.217	47.0	0.091	67.5	0.023	88.0	0.008
6.5	0.806	27.0	0.217	47.5	0.093	68.0	0.020	88.5	0.008
7.0	0.777	27.5	0.217	48.0	0.096	68.5	0.018	89.0	0.008
7.5	0.747	28.0	0.215	48.5	0.098	69.0	0.016	89.5	0.008
8.0	0.716	28.5	0.212	49.0	0.100	69.5	0.014	90.0	0.007
8.5	0.684	29.0	0.208	49.5	0.101	70.0	0.012		
9.0	0.650	29.5	0.203	50.0	0.102	70.5	0.010		
9.5	0.616	30.0	0.197	50.5	0.102	71.0	0.008		
10.0	0.581	30.5	0.190	51.0	0.102	71.5	0.007		