



Exhibit No.

Date

29 Sep 2008

Call Letters

WLPB-DT

Channel

25

Location

Baton Rouge, Louisiana

Customer

Antenna Type

TFU-24DSB-M (C)

**ELEVATION PATTERN**

RMS Gain at Main Lobe

**24.0 (13.80 dB)**

Beam Tilt

**1.00 Degrees**

RMS Gain at Horizontal

**11.9 (10.76 dB)**

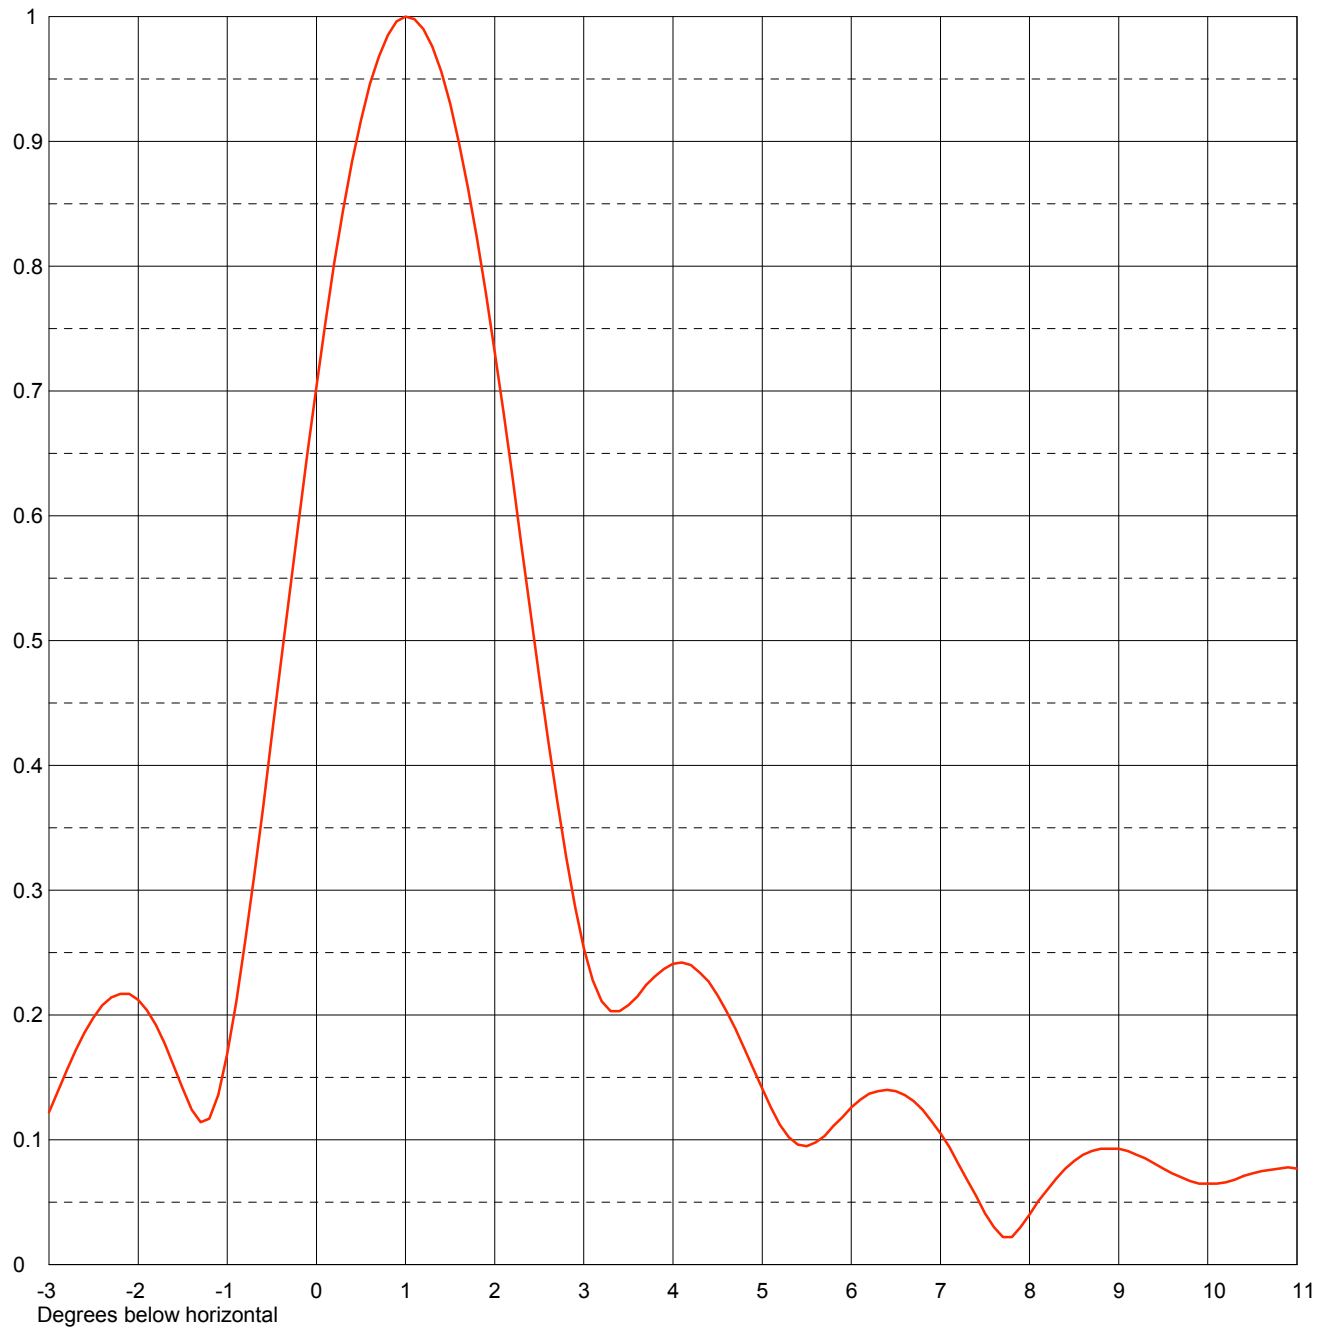
Frequency

**539.00 MHz**

Calculated / Measured

**Calculated**

Drawing #

**24B240100**

Remarks:



Exhibit No.

Date

29 Sep 2008

Call Letters

WLPB-DT

Channel

25

Location

Baton Rouge, Louisiana

Customer

Antenna Type

TFU-24DSB-M (C)

**ELEVATION PATTERN**

RMS Gain at Main Lobe

**24.0 (13.80 dB)**

Beam Tilt

**1.00 Degrees**

RMS Gain at Horizontal

**11.9 (10.76 dB)**

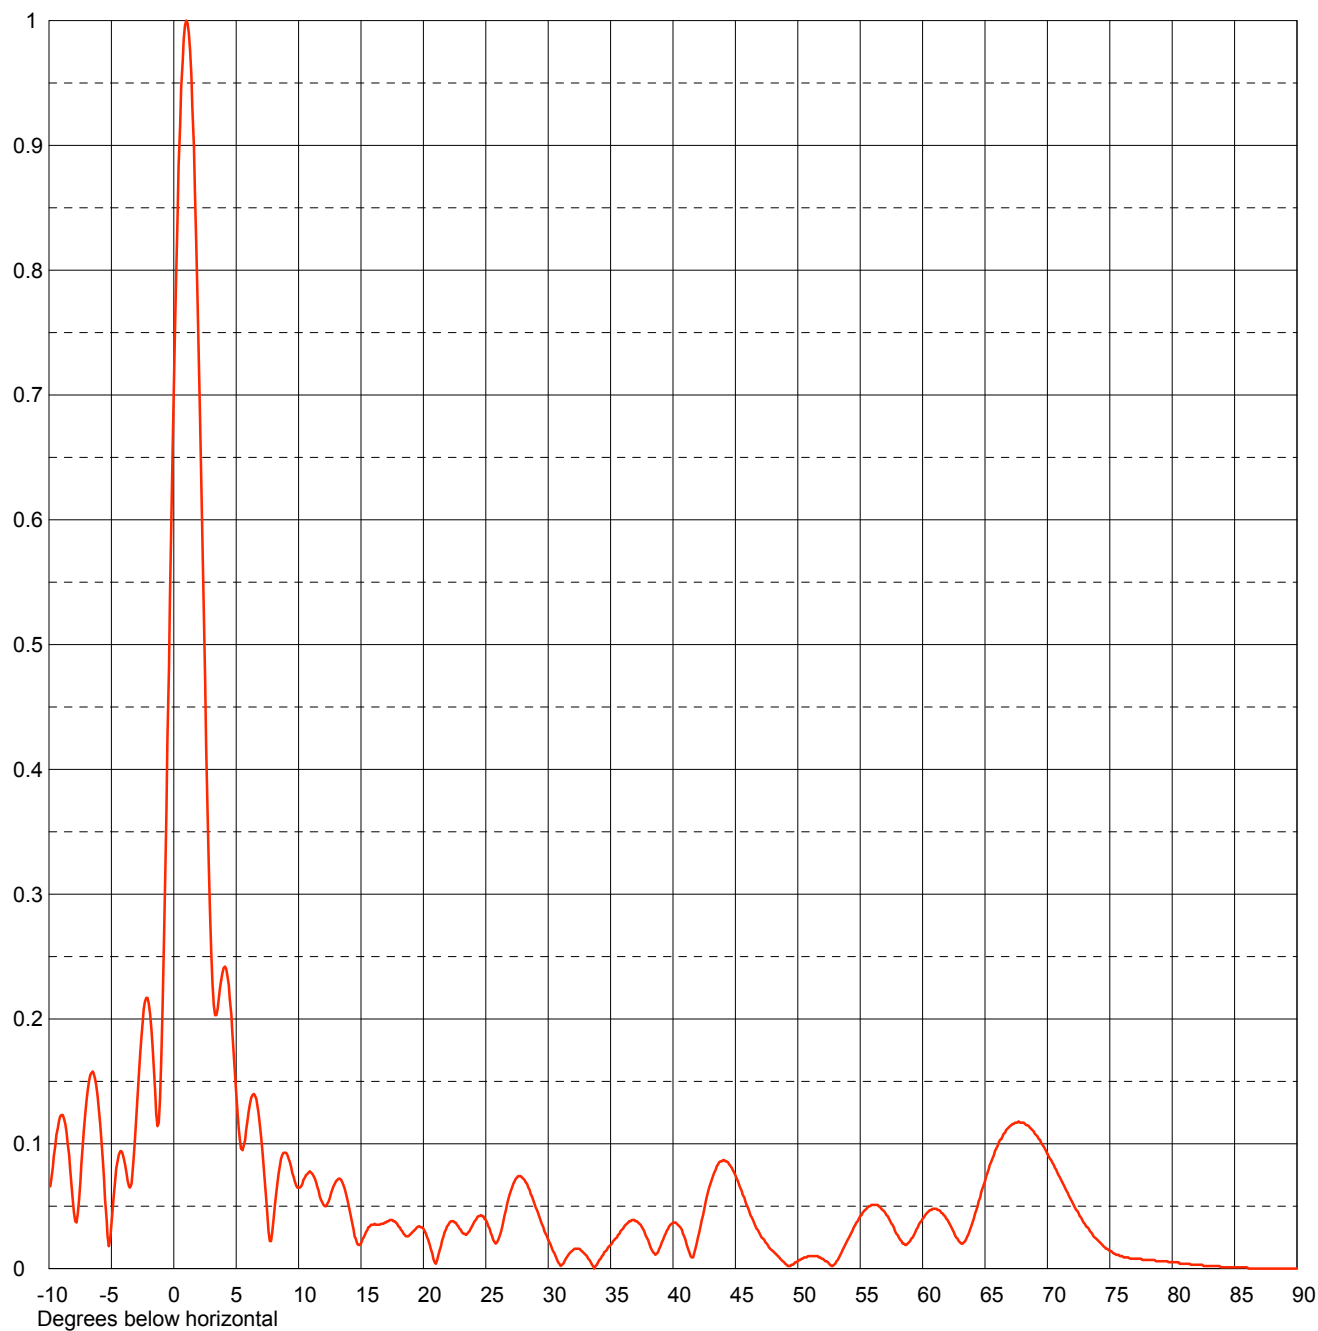
Frequency

**539.00 MHz**

Calculated / Measured

**Calculated**

Drawing #

**24B240100-90**

Remarks:



Date **29 Sep 2008**  
 Call Letters **WLPB-DT** Channel **25**  
 Location **Baton Rouge, Louisiana**  
 Customer  
 Antenna Type **TFU-24DSB-M (C)**

### TABULATION OF ELEVATION PATTERN

Elevation Pattern Drawing # **24B240100**

Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field
-10.0	0.063	2.4	0.524	10.6	0.075	30.5	0.012	51.0	0.010	71.5	0.063
-9.5	0.099	2.6	0.420	10.8	0.077	31.0	0.002	51.5	0.010	72.0	0.053
-9.0	0.123	2.8	0.327	11.0	0.077	31.5	0.009	52.0	0.008	72.5	0.044
-8.5	0.101	3.0	0.254	11.5	0.066	32.0	0.015	52.5	0.004	73.0	0.036
-8.0	0.045	3.2	0.211	12.0	0.051	32.5	0.016	53.0	0.004	73.5	0.029
-7.5	0.069	3.4	0.203	12.5	0.057	33.0	0.011	53.5	0.013	74.0	0.023
-7.0	0.134	3.6	0.215	13.0	0.070	33.5	0.003	54.0	0.023	74.5	0.018
-6.5	0.158	3.8	0.231	13.5	0.069	34.0	0.005	54.5	0.033	75.0	0.014
-6.0	0.127	4.0	0.241	14.0	0.051	34.5	0.013	55.0	0.042	75.5	0.011
-5.5	0.056	4.2	0.240	14.5	0.026	35.0	0.019	55.5	0.048	76.0	0.010
-5.0	0.035	4.4	0.227	15.0	0.020	35.5	0.025	56.0	0.051	76.5	0.009
-4.5	0.087	4.6	0.203	15.5	0.031	36.0	0.032	56.5	0.050	77.0	0.008
-4.0	0.088	4.8	0.173	16.0	0.035	36.5	0.038	57.0	0.045	77.5	0.008
-3.5	0.065	5.0	0.141	16.5	0.035	37.0	0.038	57.5	0.036	78.0	0.007
-3.0	0.122	5.2	0.112	17.0	0.037	37.5	0.033	58.0	0.027	78.5	0.007
-2.8	0.156	5.4	0.096	17.5	0.039	38.0	0.023	58.5	0.020	79.0	0.006
-2.6	0.186	5.6	0.098	18.0	0.034	38.5	0.012	59.0	0.022	79.5	0.006
-2.4	0.208	5.8	0.111	18.5	0.027	39.0	0.018	59.5	0.031	80.0	0.005
-2.2	0.217	6.0	0.126	19.0	0.028	39.5	0.030	60.0	0.040	80.5	0.005
-2.0	0.212	6.2	0.137	19.5	0.033	40.0	0.037	60.5	0.046	81.0	0.004
-1.8	0.192	6.4	0.140	20.0	0.032	40.5	0.034	61.0	0.048	81.5	0.003
-1.6	0.159	6.6	0.136	20.5	0.019	41.0	0.023	61.5	0.045	82.0	0.003
-1.4	0.124	6.8	0.124	21.0	0.004	41.5	0.009	62.0	0.039	82.5	0.002
-1.2	0.117	7.0	0.105	21.5	0.022	42.0	0.025	62.5	0.029	83.0	0.002
-1.0	0.169	7.2	0.081	22.0	0.035	42.5	0.048	63.0	0.021	83.5	0.002
-0.8	0.259	7.4	0.055	22.5	0.037	43.0	0.068	63.5	0.024	84.0	0.001
-0.6	0.366	7.6	0.030	23.0	0.031	43.5	0.082	64.0	0.037	84.5	0.001
-0.4	0.481	7.8	0.022	23.5	0.028	44.0	0.087	64.5	0.054	85.0	0.001
-0.2	0.595	8.0	0.040	24.0	0.036	44.5	0.084	65.0	0.070	85.5	0.001
0.0	0.704	8.2	0.060	24.5	0.042	45.0	0.075	65.5	0.086	86.0	0.001
0.2	0.802	8.4	0.077	25.0	0.039	45.5	0.062	66.0	0.098	86.5	0.000
0.4	0.884	8.6	0.088	25.5	0.026	46.0	0.049	66.5	0.108	87.0	0.000
0.6	0.946	8.8	0.093	26.0	0.023	46.5	0.037	67.0	0.114	87.5	0.000
0.8	0.985	9.0	0.093	26.5	0.042	47.0	0.027	67.5	0.117	88.0	0.000
1.0	1.000	9.2	0.088	27.0	0.062	47.5	0.020	68.0	0.117	88.5	0.000
1.2	0.990	9.4	0.081	27.5	0.073	48.0	0.014	68.5	0.114	89.0	0.000
1.4	0.956	9.6	0.073	28.0	0.072	48.5	0.009	69.0	0.108	89.5	0.000
1.6	0.899	9.8	0.067	28.5	0.063	49.0	0.004	69.5	0.101	90.0	0.000
1.8	0.823	10.0	0.065	29.0	0.049	49.5	0.003	70.0	0.092		
2.0	0.731	10.2	0.066	29.5	0.036	50.0	0.006	70.5	0.083		
2.2	0.630	10.4	0.071	30.0	0.023	50.5	0.009	71.0	0.073		

Remarks: