

**August 2007
KKOR(FM) Channel 233C0
Gallup, NM
Allocation Study**

The attached spacing study shows that the proposed operation meets the co-channel and adjacent channel spacing requirements for Class C0 stations as prescribed in §73.207 of the Commission's Rules, with the exception of a short-spacing to an application for a new construction permit, File No. BNPH-20070502ACR, on Channel 234C1 at Overgaard, AZ. Processing pursuant to §73.215 of the Commission's Rules is requested with respect to proposed application, and the attached allocation study map is included to demonstrate the lack of prohibited contour overlap with that facility.

Hatfield & Dawson Consulting Engineers

=====

SEARCH PARAMETERS

FM Database Date: 070823

Page 1

Channel: 233C0 94.5 MHz
 Latitude: 35 36 22
 Longitude: 108 41 26
 Safety Zone: 50 km
 Job Title: KKOR 233C0 GIBSON PEAK

Call Status	City St	FCC File No.	Channel Freq.	ERP(kW) HAAT(m)	Latitude Longitude	Bearing deg-True	Dist (km)	Req (km)
K230AF LIC	KIRTLAND NM	BLFT-971201TH	230D 93.9	0.250 245.0	36-39-49 108-12-55	19.8	124.89 0.00	0 TRANS
NEW-T APP	ST. JOHNS AZ	BNPFT-030317EQS	231D 94.1	0.115 146.0	34-34-18 109-16-43	205.1	126.67 0.00	0 TRANS
K231BB LIC	SHIPROCK NM	BLFT-070618AAU	231D 94.1	0.010 19.0	36-47-04 108-40-44	0.5	130.75 0.00	0 TRANS
NEW-T APP	EAGAR AZ	BNPFT-030317LJO	232D 94.3	0.115 164.0	34-06-16 109-18-00	198.6	175.66 0.00	0 TRANS
NEW APP	OVERGAARD AZ	BSFH-061218ADL	232C3 94.3	0.000 0.0	34-30-57 110-35-14	235.5	211.11 48.11	163 CLEAR
NEW-T APP	SHOW LOW AZ	BNPFT-030317EAA	232D 94.3	0.015 430.0	34-12-20 109-56-26	216.6	192.85 0.00	0 TRANS
NEW-T APP	WINSLOW AZ	BNPFT-030317EZW	232D 94.3	0.170 121.0	35-01-25 110-37-38	250.3	187.60 0.00	0 TRANS
NEW-T APP	CORTEZ CO	BNPFT-030317IAM	232D 94.3	0.170 145.0	37-20-56 108-35-39	2.5	193.58 0.00	0 TRANS
NEW-T APP	SHOW LOW AZ	BNPFT-030317CKN	233D 94.5	0.015 430.0	34-12-20 109-56-26	216.6	192.85 0.00	0 TRANS
NEW-T APP	TUBA CITY AZ	BNPFT-030317CML	233D 94.5	0.075 197.0	36-07-54 111-14-60	285.0	238.40 0.00	0 TRANS
NEW-T APP	CORRALES NM	BNPFT-030313BMT	233D 94.5	0.010 DA 1569.0	35-12-54 106-27-04	101.4	207.99 0.00	0 TRANS
KKOR LIC	GALLUP NM	BMLH-980720KG	233C 94.5	100.000 421.0	35-28-03 108-14-25	110.6	43.64 -237.36	281 SHORT
ABSOLUTE MINIMUM 73.215 SPACING = 270 KM								
NEW-T APP	NORTH VALLEY NM	BNPFT-030314API	233D 94.5	0.075 179.0	35-04-15 106-31-30	106.2	205.64 0.00	0 TRANS
NEW-T APP	RURAL SAN JUAN COUNT UT	BNPFT-030317LYK	233D 94.5	0.030 118.0	37-16-12 109-33-32	337.5	200.38 0.00	0 TRANS

=====

SEARCH PARAMETERS FM Database Date: 070823

Channel: 233C0 94.5 MHz Page 2

Latitude: 35 36 22

Longitude: 108 41 26

Safety Zone: 50 km

Job Title: KKOR 233C0 GIBSON PEAK

Call Status	City St	FCC File No.	Channel Freq.	ERP(kW) HAAT(m)	Latitude Longitude	Bearing deg-True	Dist (km)	Req (km)
KJNN-LP LIC	HOLBROOK AZ	BLL-060208AAD	234L1 94.7	0.100 -51.6	34-52-59 110-11-39	239.9	158.63 47.63	111 CLEAR
NEW APP	OVERGAARD AZ	BNPH-070502ACR	234C1 94.7	100.000 234.0	34-44-53 110-33-37	241.2	195.12 -0.88	196 SHORT
ABSOLUTE MINIMUM 73.215 SPACING = 176 KM								
NEW RSV	OVERGAARD AZ	-	234C1 94.7	0.000 0.0	34-44-53 110-33-37	241.2	195.12 -0.88	196 SHORT
ABSOLUTE MINIMUM 73.215 SPACING = 176 KM								
NEW-T APP	SHOW LOW AZ	BNPFT-030317BCI	234D 94.7	0.250 367.0	34-12-21 109-56-29	216.6	192.87 0.00	0 TRANS
NEW-T APP	SHOW LOW AZ	BNPFT-030317LXW	234D 94.7	0.016 388.0	34-12-20 109-56-30	216.6	192.91 0.00	0 TRANS
NEW-T APP	SPRINGERVILLE AZ	BNPFT-030317ECJ	234D 94.7	0.250 169.0	34-08-17 109-16-10	198.1	171.24 0.00	0 TRANS
K232DA APP	DURANGO CO	BLFT-030317JMK	234D 94.7	0.041 306.0	37-15-43 107-54-22	20.6	196.74 0.00	0 TRANS
NEW-T APP	DURANGO CO	BNPFT-030314CJR	234D 94.7	0.100 366.0	37-15-45 107-54-07	20.7	196.93 0.00	0 TRANS
K232DA APP	HESPERUS CO	BMJPFT-030317JMK	234D 94.7	0.041 306.0	37-15-43 107-54-22	20.6	196.74 0.00	0 TRANS
KKIM-FM LIC	SANTA FE NM	BLH-000410ABA	234C1 94.7	100.000 243.0	36-05-21 106-01-41	76.6	246.43 50.43	196 CLEAR
NEW-T APP	ST. JOHNS AZ	BNPFT-030317DWQ	235D 94.9	0.115 146.0	34-34-18 109-16-43	205.1	126.67 0.00	0 TRANS
KWYK-FM LIC	AZTEC NM	BLH-891024KF	235C1 94.9	100.000 132.0	36-41-54 108-13-18	19.0	128.33 34.33	94 CLEAR
NEW-T APP	GALLUP EAST NM	BNPFT-030313AON	235D 94.9	0.250 112.0	35-32-26 108-44-28	212.1	8.60 0.00	0 TRANS

44444 END OF FM SPACING STUDY FOR CHANNEL 233 44444

August 2007
KYVA-FM Channel 279C0 Church Rock, NM
KKOR(FM) Channel 233C0 Gallup, NM
KXXI (FM) Channel 229C0 Gallup, NM
NIER Analysis

Facilities Proposed

Millennium Media proposes to consolidate three FM stations on a new tower to be located on Gibson Peak in New Mexico. The proposed operations will be on Channel 279 (103.7 MHz) and Channel 233 (94.5 MHz) using the same 10-element antenna with effective radiated powers of 100 kilowatts and 85 kilowatts respectively, and Channel 229 (93.7 MHz) using a separate 10-element antenna located lower on the tower. Both antennas will be circularly-polarized omni-directional full-wave-spaced antennas and will be side-mounted on a uniform cross-section guyed tower.

Notice of the proposed tower construction has been filed with the Federal Aviation Administration on FAA Form 7460-1. Upon receipt of the FAA's determination of no hazard, FCC Antenna Structure Registration for the tower will be filed on Form 854, and the resulting Antenna Structure Registration Number will be promptly supplied to the Audio Division.

NIER Calculations

The power density calculations shown below were made using the techniques outlined in OET Bulletin No. 65. "Ground level" calculations in this report have been made at a reference height of 2 meters above ground to provide a worst-case estimate of exposure for persons standing on the ground in the vicinity of the tower. The equation shown below was used to calculate the ground level power density figures from each antenna.

$$S(\text{mW} / \text{cm}^2) = \frac{33.40981 \times \text{AdjERP}(\text{Watts})}{D^2}$$

Where: *AdjERP(Watts)* is the maximum lobe effective radiated power times the element pattern factor times the array pattern factor.

D is the distance in meters from the center of radiation to the calculation point.

Ground level power densities have been calculated for locations extending from the base of

Hatfield & Dawson Consulting Engineers


the tower to a distance of 1000 meters. Values past this point are increasingly negligible.

Calculations of the power density produced by the proposed facilities at this transmitter site are summarized in the following table:

Call	Avg or Peak ERP Antenna Model	Relative Field	Height AGL	Calculated Exposure	Gen Pub FCC Limit	% of Limit
KYVA-FM	100 kW avg ERI Rototiller	FMMModel	90 m	44.3 $\mu\text{W}/\text{cm}^2$	200 $\mu\text{W}/\text{cm}^2$	22.2%
KKOR(FM)	85 kW avg ERI Rototiller	FMMModel	90 m	37.7 $\mu\text{W}/\text{cm}^2$	200 $\mu\text{W}/\text{cm}^2$	18.9%
KXXI(FM)	100kW avg ERI Rototiller	FMMModel	54 m	126.5 $\mu\text{W}/\text{cm}^2$	200 $\mu\text{W}/\text{cm}^2$	63.3%

These calculations show that the maximum calculated power density produced at two meters above ground level by the proposed operations of KYVA-FM, KKOR and KXXI (were their maxima to coincide, which they do not) is 208.5 $\mu\text{W}/\text{cm}^2$, which is 20.9% of 1000 $\mu\text{W}/\text{cm}^2$ (the FCC standard for controlled environments) and 104.3% of 200 $\mu\text{W}/\text{cm}^2$ (the FCC standard for uncontrolled environments). The authorized co-located facilities of KLLU and KGLP would (once constructed) add to the ground-level power density at the site. Post-construction power density measurements will be done at the site if required by the Commission.

Pursuant to OET Bulletin No. 65, all station personnel and contractors are required to follow appropriate safety procedures before any work is commenced on the antenna tower, including reduction in power or discontinuance of operation before any maintenance work is undertaken. The permittee/licensee in coordination with other users of the site must reduce power or cease operation as necessary to protect persons having access to the site, tower or antenna from radiofrequency radiation in excess of FCC guidelines.

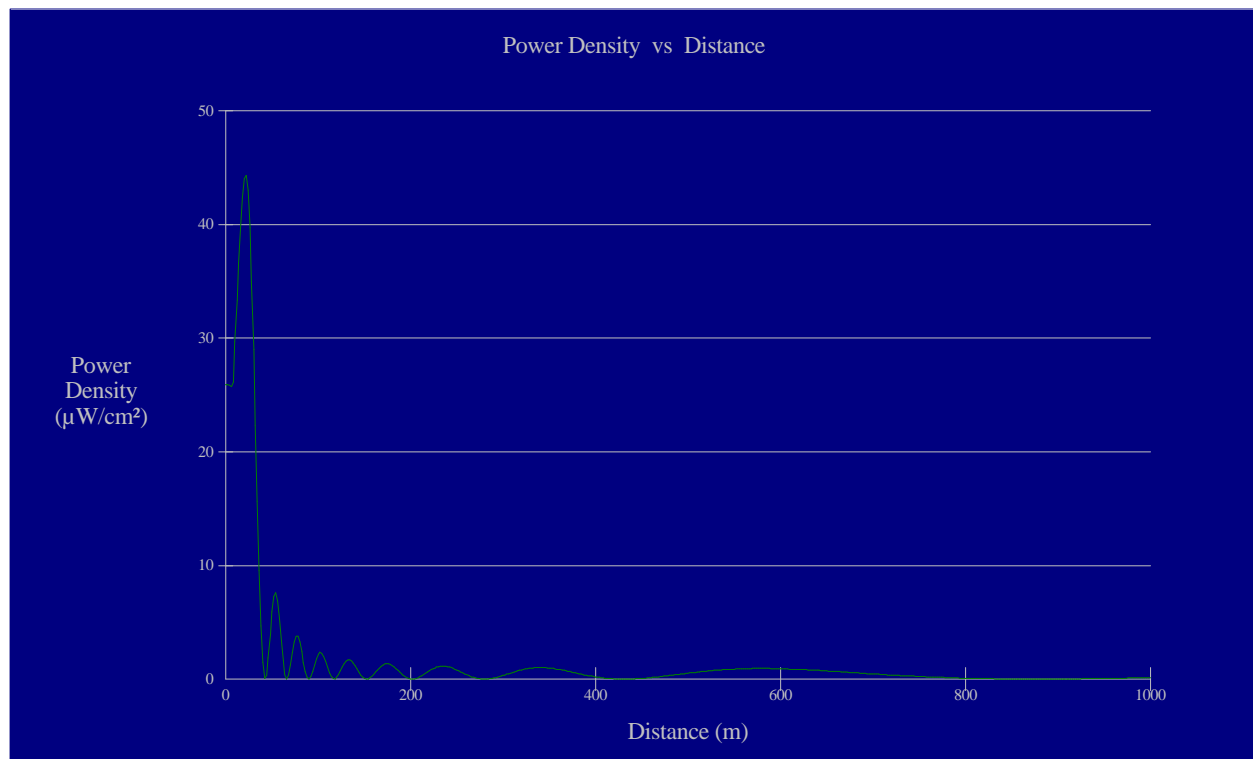

Ground-Level NIER

OET FMModel

KYVA-FM Church Rock, NM

Antenna Type: ERI "rototiller"

No. of Elements: 10

Element Spacing: 1.0 wavelength


Distance: 1000 meters

Horizontal ERP: 100 kW

Vertical ERP: 100 kW

Antenna Height: 90 meters AGL

Maximum Power Density is $44.3 \mu\text{W}/\text{cm}^2$ at 22 meters from the antenna structure.

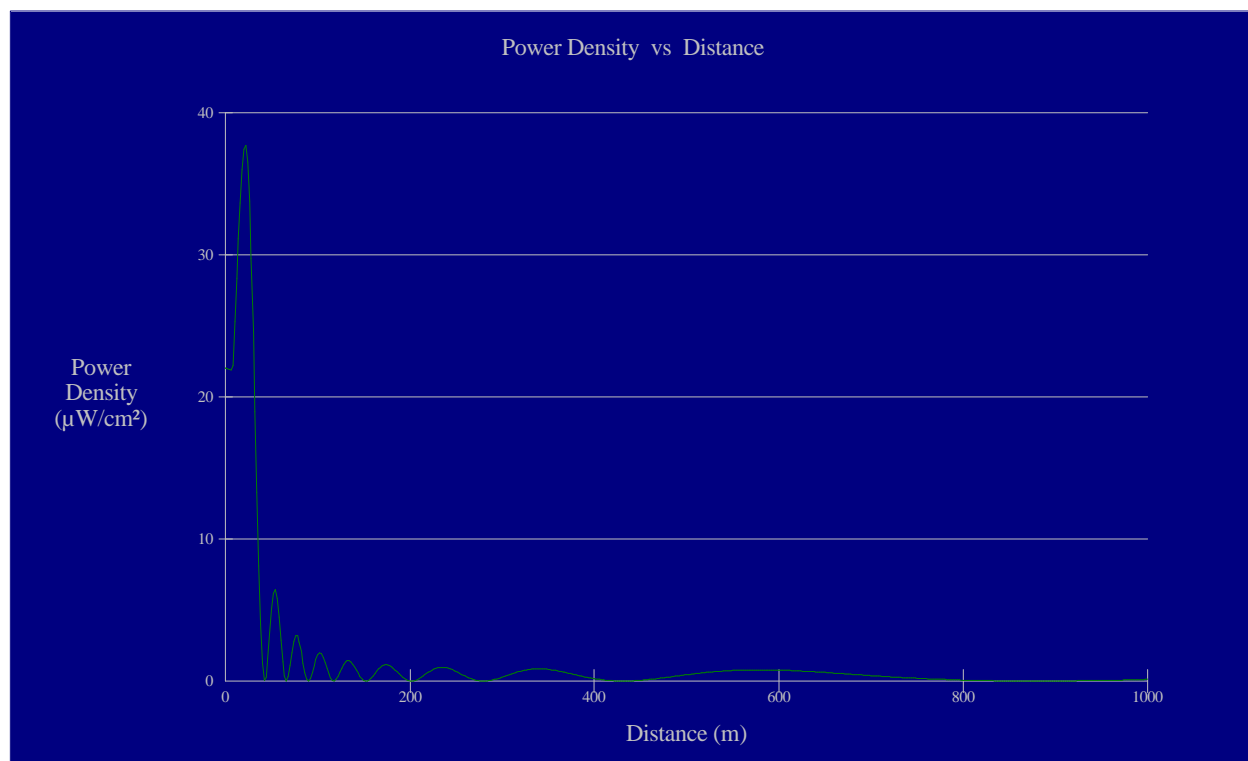

Ground-Level NIER

OET FMModel


KKOR Gallup, NM

Antenna Type: ERI "rototiller"
No. of Elements: 10
Element Spacing: 1.0 wavelength

Distance: 1000 meters
Horizontal ERP: 85 kW
Vertical ERP: 85 kW

Antenna Height: 90 meters AGL

Maximum Power Density is $37.7 \mu\text{W}/\text{cm}^2$ at 22 meters from the antenna structure.

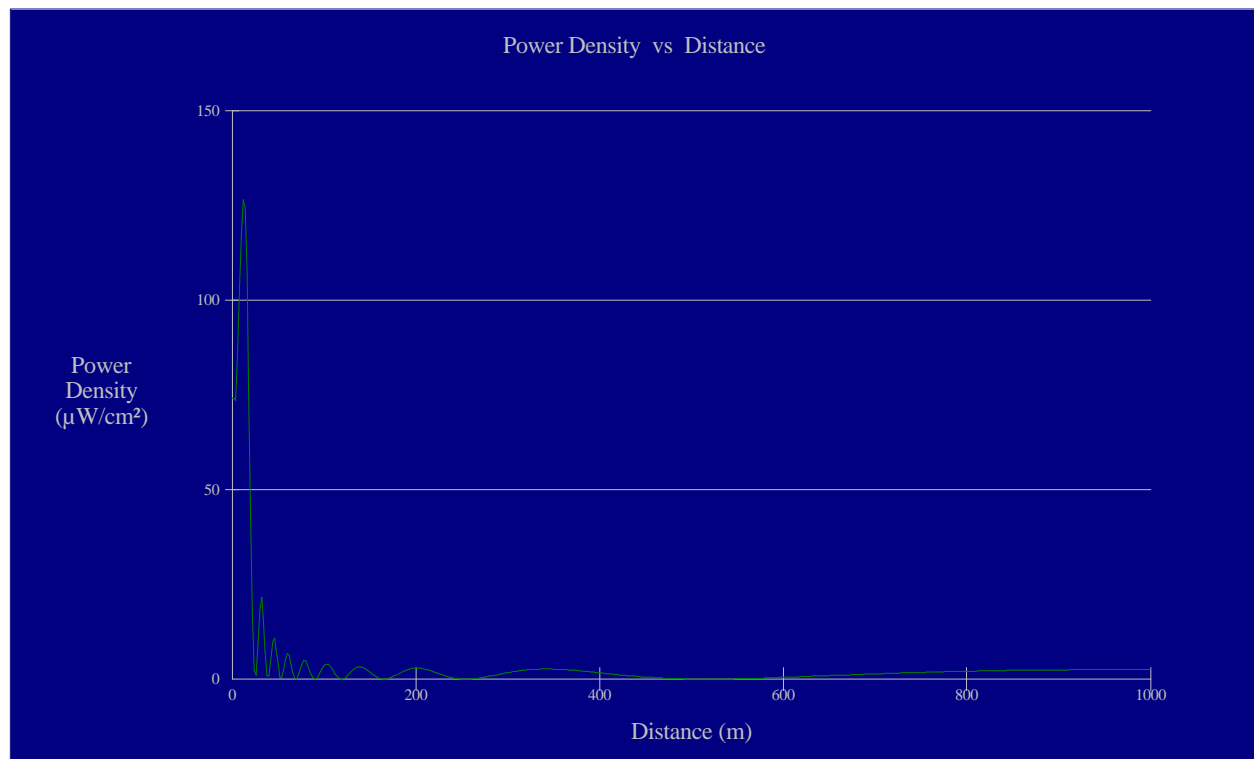

Ground-Level NIER

OET FMModel

KXXI Gallup, NM

Antenna Type: ERI "rototiller"
No. of Elements: 10
Element Spacing: 1.0 wavelength

Distance: 1000 meters
Horizontal ERP: 100 kW
Vertical ERP: 100 kW

Antenna Height: 54 meters AGL

Maximum Power Density is $126.5 \mu\text{W}/\text{cm}^2$ at 12 meters from the antenna structure.