



**STATEMENT OF JOHN E. HIDLE, P.E.  
IN SUPPORT OF AN AMENDMENT  
TO AN APPLICATION FOR  
POST REPACK CONSTRUCTION PERMIT  
FILE # 0000025128  
WTVX - FORT PIERCE, FLORIDA  
DTV - CH. 20 - 725 kW - 455.7 m HAAT**

Prepared for: WTVX LICENSEE, LLC

I am a Consulting Engineer, an employee in the firm of Carl T. Jones Corporation, with offices located in Springfield, Virginia. My education and experience are a matter of record with the Federal Communications Commission. I am a Licensed Professional Engineer in the Commonwealth of Virginia, License No. 7418, and in the State of New York, License No. 63418.

#### **GENERAL**

This office has been authorized by WTVX LICENSEE, LLC, licensee of WTVX, channel 34, facility ID number 35575, licensed to Fort Pierce, Florida, to prepare this statement, FCC Form 2100, Schedule A, its technical sections, and the associated exhibits in support of an amendment to application for construction permit, in accordance with the Incentive Auction Closing and Channel Reassignment Public Notice, DA 17-314, and the technical information provided in the confidential reassignment letter from the FCC announcing the substitution of DTV channel 20 for DTV channel 34 to be used by WTVX for its post-reassignment broadcasting. The instant amendment clarifies the antenna relative fields in the form, to require no rotation of the horizontal azimuth pattern.

**STATEMENT OF JOHN E. HIDLE, P.E.  
WTVX - Fort Pierce, Florida  
PAGE 2**

**DIRECTIONAL ANTENNA**

The applicant proposes to install a new Dielectric model TFU-24JTT/VP P216 elliptically polarized directional transmitting antenna with its center of radiation located at a height above ground of 454.2 meters, and a height above average terrain of 455.7 meters. The antenna manufacturer's directional horizontal plane azimuth radiation pattern for the horizontally polarized component is shown and tabulated in exhibit 2. The manufacturer's horizontal plane azimuth pattern for the vertically polarized component is shown and tabulated in exhibit 3. The manufacturer's vertical plane elevation radiation pattern, illustrating the antenna's radiation characteristics above and below the horizontal plane is shown and tabulated in Exhibit 4.

**PREDICTED COVERAGE CONTOURS**

The predicted coverage contours were calculated in accordance with the method described in Section 73.625(b) of the Rules, utilizing the appropriate F(50,90) propagation curves (47 CFR Section 73.699, Figure 9), proposed Effective Radiated Power, and antenna height above average terrain as determined for each profile radial. The average terrain on the eight cardinal radials from 3 kilometers to 16 kilometers from the site, was determined using the NED Three Second US Terrain Database as permitted in the FCC Rules. The antenna site elevation and coordinates were determined from FCC antenna registration data. Exhibit 1 shows the predicted Noise Limited (39.36 dBu) contour, and the principal community (48 dBu) contour. The 48 dBu contour completely encompasses the principal community of license, Fort Pierce, Florida.

**STATEMENT OF JOHN E. HIDLE, P.E.  
WTVX - Fort Pierce, Florida  
PAGE 3**

**ALLOCATION CONSIDERATIONS**

***Post-Transition DTV Considerations***

A study was performed, using the FCC's software, tv\_study, v. 2.2.2, to determine if the instant application for construction permit is predicted to cause new prohibited interference to post reassignment DTV stations, construction permits, DTV allotments or Class A DTV stations. The study results, shown in Appendix B, indicate that the instant application for construction permit is predicted to cause no new interference exceeding 0.5% to the populations served by any post reassignment DTV station, construction permit, allotment or Class A DTV stations. The study also shows that WTVX's proposed service area is within the baseline plus 1%. (See Appendix B)

***International DTV Considerations***

The WTVX site is located more than 1,500 kilometers from the nearest point on either the US-Canadian border, or the US-Mexican border. Therefore, there are no international considerations required.

**BLANKETING AND INTERMODULATION INTERFERENCE**

Other broadcast and non-broadcast facilities are either co-located with, or located within 10 km of the proposed WTVX site. The applicant does recognize its responsibility to remedy complaints of interference that might result from this proposal in accordance with applicable Rules.

**STATEMENT OF JOHN E. HIDLE, P.E.**

**WTVX - Fort Pierce, Florida**

**PAGE 4**

**RADIO FREQUENCY IMPACT**

The FCC's guidelines and procedures for evaluating environmental effects of radio frequency (RF) emissions are generally based on recommendations by the National Council on Radiation Protection and Measurements (NCRP) in NCRP Report No. 86 (1986) and by the American National Standards Institute and the Institute of Electrical and Electronic Engineers, LLC (IEEE) in ANSI/IEEE C95.1-1992 (IEEE C95.1-1991). The guidelines define a maximum permissible exposure (MPE) level for occupational or "controlled" situations, and for "uncontrolled" environments that apply in all other cases that might affect the general public. The FCC Office of Engineering and Technology's technical bulletin No. 65 entitled, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields" (Edition 97-01, August 1997), provides assistance to determine whether FCC-regulated transmitting facilities, operations or devices comply with guidelines for human exposure to radio frequency electromagnetic fields as adopted by the Commission in 1996. OET Bulletin No. 65 contains the technical information necessary to evaluate compliance with the FCC's policies and guidelines.

The Maximum Permitted Exposure (MPE) level for broadcast facilities that operate on a frequency between 30 MHZ and 300 MHZ is 200 microwatts per centimeter squared ( $\mu\text{W}/\text{cm}^2$ ) for an "uncontrolled" environment, and is 1000 microwatts per centimeter squared ( $\mu\text{W}/\text{cm}^2$ ) for a "controlled" environment. The MPE level for broadcast facilities that operate on a frequency between 300 MHZ and 1500 MHZ, primarily UHF TV stations, is determined for an "uncontrolled" environment by dividing the operating frequency in MHZ by 1.5, and is similarly determined for a "controlled" environment by dividing the operating

**STATEMENT OF JOHN E. HIDLE, P.E.  
WTVX - Fort Pierce, Florida  
PAGE 5**

frequency in MHZ by 0.3.

The predicted emissions of WTVX must be considered, in addition to predicted emissions from any other proposed or existing stations at the site. For WTVX, which will operate on television Channel 20 (506-512 MHZ), the MPE is 339.3 microwatts per centimeter squared ( $\mu\text{W}/\text{cm}^2$ ) in an "uncontrolled" environment and 1,696.7  $\mu\text{W}/\text{cm}^2$  in a "controlled" environment. The proposed WTVX facility will operate with a maximum ERP of 725 kW from an elliptically polarized directional transmitting antenna with a centerline height of 454.2 meters above ground level (AGL). Considering a conservative predicted vertical plane relative field factor of 0.300 the WTVX facility is predicted to produce a power density at two meters above ground level of 15.48  $\mu\text{W}/\text{cm}^2$ , which is 4.56% of the FCC guideline value for an "uncontrolled" environment, and 0.91% of the FCC's guideline value for "controlled" environments. There is one LPTV DTV station and two FM stations located at the WTVX site. The total estimated percentage of the ANSI value at the proposed site, including the cumulative radiation from all authorizations located within the relevant proximity, is 94.73% of the limit applicable to "uncontrolled" environments, and 18.95% of the limit for "controlled" environments. (See Appendix A)

**OCCUPATIONAL SAFETY**


The licensee of WTVX is committed to the protection of station personnel and/or tower contractors working in the vicinity of the WTVX antenna, and is committed to reducing power or ceasing operation during times of maintenance of the transmission systems, when necessary, to ensure protection to personnel.


**STATEMENT OF JOHN E. HIDLE, P.E.  
WTVX - Fort Pierce, Florida  
PAGE 6**

**SUMMARY**

It is submitted that the instant amendment to the application for construction permit to change WTVX from channel 34 to channel 20, as described herein, complies with the Rules, Regulations and relevant Policies of the Federal Communications Commission. This statement, FCC Form 2100, its technical sections, and the attached exhibits were prepared by me or under my direct supervision and are believed to be true and correct to the best of my knowledge and belief.

DATED: July 26, 2017

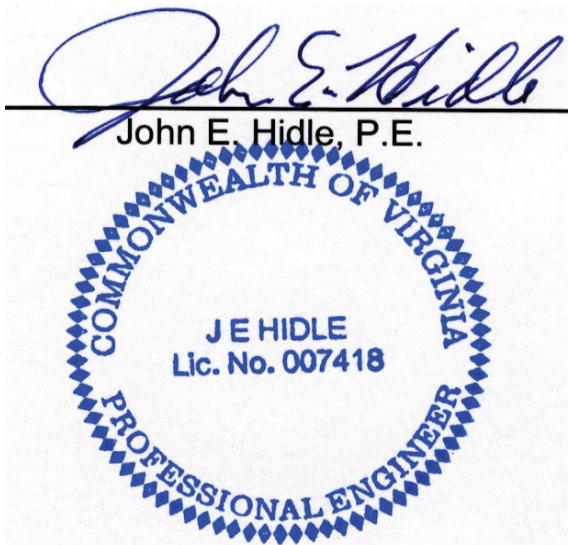

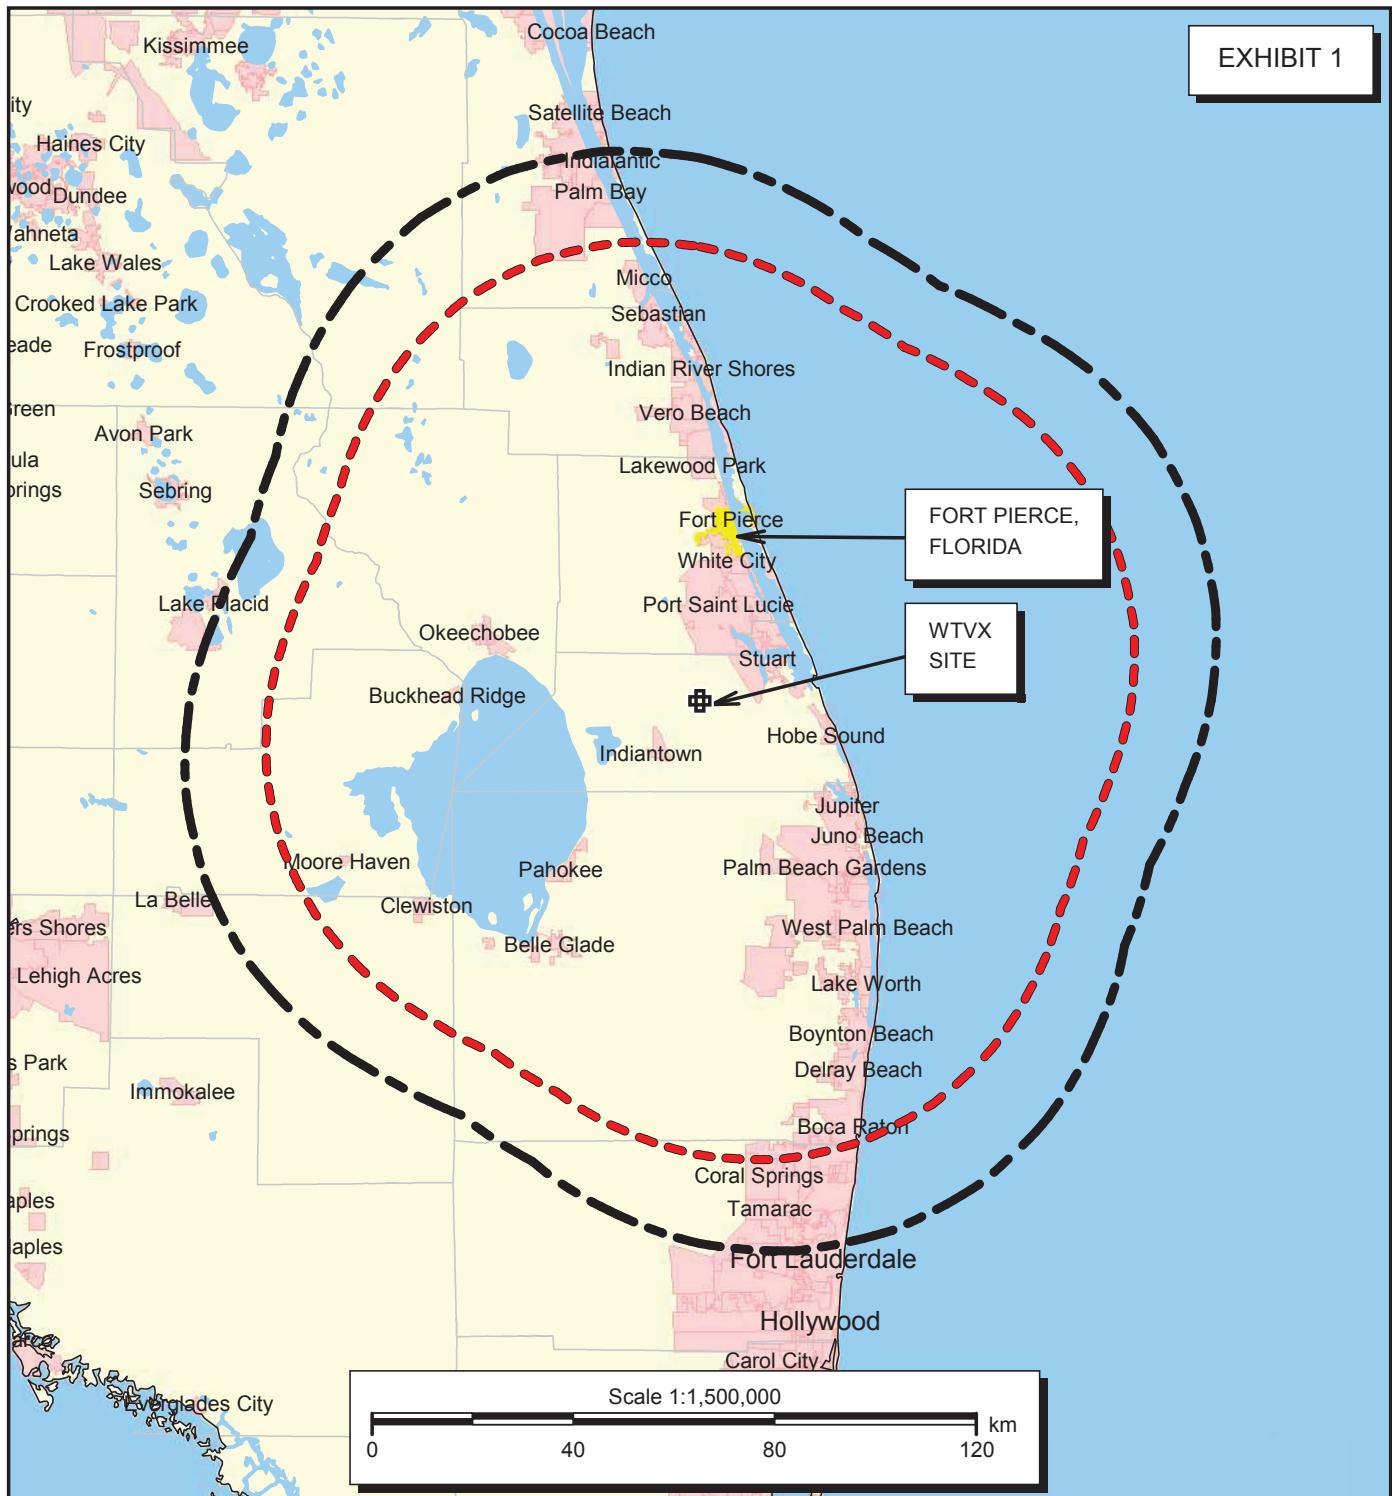


## PREDICTED COVERAGE CONTOURS

WTVX - FORT PIERCE, FLORIDA  
 DTV Channel 20 - 725 kW ERP - 455.7 M HAAT  
 JUNE, 2017

Predicted Noise Limited 39.36 dBu  
 F(50,90) Coverage Contour



Predicted Principal Community 48 dBu  
 F(50,90) Coverage Contour

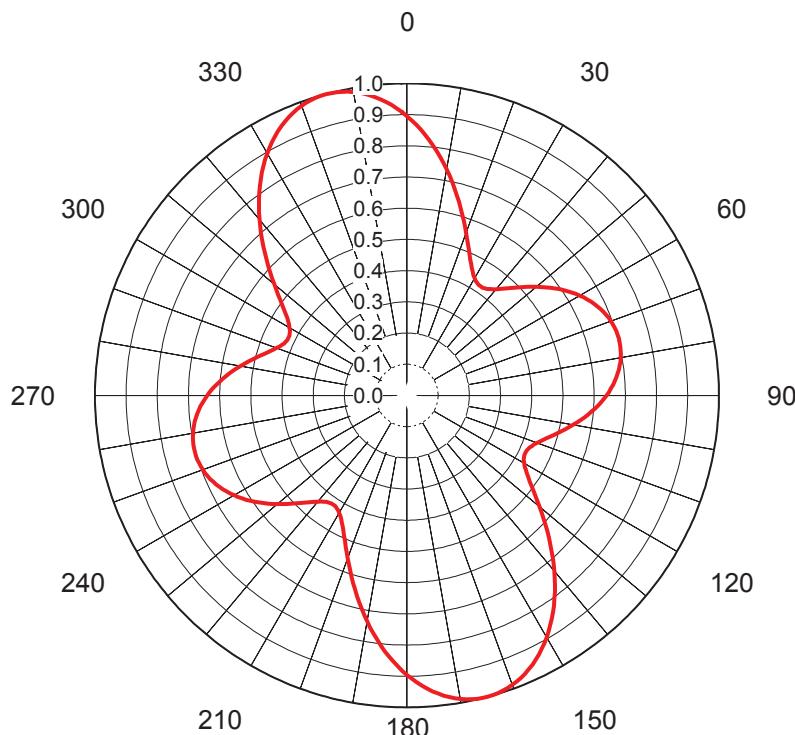


## AZIMUTH PATTERN Horizontal Polarization

Proposal No. C-70024  
 Date 12-Feb-17  
 Call Letters WTVX 20  
 Frequency 509 MHz  
 Antenna Type TFU-24JTT/VP P216  
  
 Gain 2.14 (3.31dB)  
 Calculated  
  
 Directional Drawing # TFU-P216H

Deg	Value																						
0	0.895	36	0.425	72	0.701	108	0.460	144	0.805	180	0.895	216	0.425	252	0.701	288	0.460	324	0.805				
1	0.882	37	0.427	73	0.702	109	0.452	145	0.822	181	0.882	217	0.427	253	0.702	289	0.452	325	0.822				
2	0.868	38	0.432	74	0.703	110	0.445	146	0.837	182	0.868	218	0.432	254	0.703	290	0.445	326	0.837				
3	0.853	39	0.438	75	0.704	111	0.438	147	0.853	183	0.853	219	0.438	255	0.704	291	0.438	327	0.853				
4	0.837	40	0.445	76	0.703	112	0.432	148	0.868	184	0.837	220	0.445	256	0.703	292	0.432	328	0.868				
5	0.822	41	0.452	77	0.702	113	0.427	149	0.882	185	0.822	221	0.452	257	0.702	293	0.427	329	0.882				
6	0.805	42	0.460	78	0.701	114	0.425	150	0.895	186	0.805	222	0.460	258	0.701	294	0.425	330	0.895				
7	0.788	43	0.469	79	0.699	115	0.422	151	0.909	187	0.788	223	0.469	259	0.699	295	0.422	331	0.909				
8	0.771	44	0.479	80	0.696	116	0.422	152	0.920	188	0.771	224	0.479	260	0.696	296	0.422	332	0.920				
9	0.753	45	0.488	81	0.693	117	0.422	153	0.932	189	0.753	225	0.488	261	0.693	297	0.422	333	0.932				
10	0.735	46	0.499	82	0.689	118	0.425	154	0.942	190	0.735	226	0.499	262	0.689	298	0.425	334	0.942				
11	0.717	47	0.509	83	0.685	119	0.428	155	0.952	191	0.717	227	0.509	263	0.685	299	0.428	335	0.952				
12	0.699	48	0.520	84	0.680	120	0.434	156	0.961	192	0.699	228	0.520	264	0.680	300	0.434	336	0.961				
13	0.680	49	0.531	85	0.675	121	0.440	157	0.969	193	0.680	229	0.531	265	0.675	301	0.440	337	0.969				
14	0.662	50	0.542	86	0.668	122	0.449	158	0.976	194	0.662	230	0.542	266	0.668	302	0.449	338	0.976				
15	0.643	51	0.553	87	0.662	123	0.458	159	0.983	195	0.643	231	0.553	267	0.662	303	0.458	339	0.983				
16	0.625	52	0.563	88	0.655	124	0.470	160	0.987	196	0.625	232	0.563	268	0.655	304	0.470	340	0.987				
17	0.607	53	0.574	89	0.648	125	0.481	161	0.992	197	0.607	233	0.574	269	0.648	305	0.481	341	0.992				
18	0.589	54	0.584	90	0.640	126	0.494	162	0.995	198	0.589	234	0.584	270	0.640	306	0.494	342	0.995				
19	0.572	55	0.594	91	0.632	127	0.508	163	0.998	199	0.572	235	0.594	271	0.632	307	0.508	343	0.998				
20	0.555	56	0.604	92	0.623	128	0.523	164	0.999	200	0.555	236	0.604	272	0.623	308	0.523	344	0.999				
21	0.539	57	0.614	93	0.614	129	0.539	165	1.000	201	0.539	237	0.614	273	0.614	309	0.539	345	1.000				
22	0.523	58	0.623	94	0.604	130	0.555	166	0.999	202	0.523	238	0.623	274	0.604	310	0.555	346	0.999				
23	0.508	59	0.632	95	0.594	131	0.572	167	0.998	203	0.508	239	0.632	275	0.594	311	0.572	347	0.998				
24	0.494	60	0.640	96	0.584	132	0.589	168	0.995	204	0.494	240	0.640	276	0.584	312	0.589	348	0.995				
25	0.481	61	0.648	97	0.574	133	0.607	169	0.992	205	0.481	241	0.648	277	0.574	313	0.607	349	0.992				
26	0.470	62	0.655	98	0.563	134	0.625	170	0.987	206	0.470	242	0.655	278	0.563	314	0.625	350	0.987				
27	0.458	63	0.662	99	0.553	135	0.643	171	0.983	207	0.458	243	0.662	279	0.553	315	0.643	351	0.983				
28	0.449	64	0.668	100	0.542	136	0.662	172	0.976	208	0.449	244	0.668	280	0.542	316	0.662	352	0.976				
29	0.440	65	0.675	101	0.531	137	0.680	173	0.969	209	0.440	245	0.675	281	0.531	317	0.680	353	0.969				
30	0.434	66	0.680	102	0.520	138	0.699	174	0.961	210	0.434	246	0.680	282	0.520	318	0.699	354	0.961				
31	0.428	67	0.685	103	0.509	139	0.717	175	0.952	211	0.428	247	0.685	283	0.509	319	0.717	355	0.952				
32	0.425	68	0.689	104	0.499	140	0.735	176	0.942	212	0.425	248	0.689	284	0.499	320	0.735	356	0.942				
33	0.422	69	0.693	105	0.488	141	0.753	177	0.932	213	0.422	249	0.693	285	0.488	321	0.753	357	0.932				
34	0.422	70	0.696	106	0.479	142	0.771	178	0.920	214	0.422	250	0.696	286	0.479	322	0.771	358	0.920				
35	0.422	71	0.699	107	0.469	143	0.788	179	0.909	215	0.422	251	0.699	287	0.469	323	0.788	359	0.909				

This document contains proprietary and confidential information of Dielectric. It is to be used solely for the purpose for which it is provided. No disclosure, reproduction, or use of this document or any part of it may be made without the written permission of Dielectric.

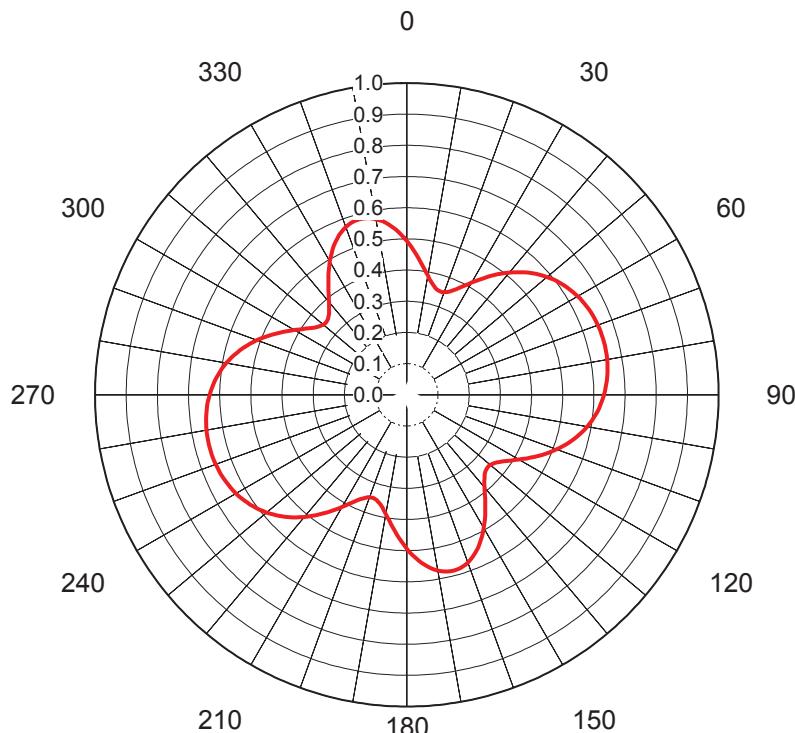

## AZIMUTH PATTERN Vertical Polarization

Proposal No. C-70024  
 Date 12-Feb-17  
 Call Letters WTVX 20  
 Frequency 509 MHz  
 Antenna Type TFU-24JTT/VP P216  
  
 Gain 1.57 (1.97dB)  
 Calculated  
  
 Directional Drawing # TFU-P216V D20

Deg	Value																		
0	0.494	36	0.474	72	0.654	108	0.529	144	0.428	180	0.494	216	0.474	252	0.654	288	0.529	324	0.428
1	0.483	37	0.484	73	0.654	109	0.521	145	0.439	181	0.483	217	0.484	253	0.654	289	0.521	325	0.439
2	0.472	38	0.493	74	0.655	110	0.512	146	0.450	182	0.472	218	0.493	254	0.655	290	0.512	326	0.450
3	0.461	39	0.503	75	0.655	111	0.503	147	0.461	183	0.461	219	0.503	255	0.655	291	0.503	327	0.461
4	0.450	40	0.512	76	0.655	112	0.493	148	0.472	184	0.450	220	0.512	256	0.655	292	0.493	328	0.472
5	0.439	41	0.521	77	0.654	113	0.484	149	0.483	185	0.439	221	0.521	257	0.654	293	0.484	329	0.483
6	0.428	42	0.529	78	0.654	114	0.474	150	0.494	186	0.428	222	0.529	258	0.654	294	0.474	330	0.494
7	0.417	43	0.538	79	0.653	115	0.464	151	0.504	187	0.417	223	0.538	259	0.653	295	0.464	331	0.504
8	0.407	44	0.546	80	0.652	116	0.454	152	0.514	188	0.407	224	0.546	260	0.652	296	0.454	332	0.514
9	0.397	45	0.553	81	0.651	117	0.445	153	0.523	189	0.397	225	0.553	261	0.651	297	0.445	333	0.523
10	0.388	46	0.561	82	0.650	118	0.435	154	0.532	190	0.388	226	0.561	262	0.650	298	0.435	334	0.532
11	0.380	47	0.568	83	0.649	119	0.425	155	0.541	191	0.380	227	0.568	263	0.649	299	0.425	335	0.541
12	0.372	48	0.575	84	0.647	120	0.415	156	0.549	192	0.372	228	0.575	264	0.647	300	0.415	336	0.549
13	0.365	49	0.581	85	0.645	121	0.406	157	0.556	193	0.365	229	0.581	265	0.645	301	0.406	337	0.556
14	0.359	50	0.588	86	0.643	122	0.397	158	0.562	194	0.359	230	0.588	266	0.643	302	0.397	338	0.562
15	0.355	51	0.593	87	0.641	123	0.389	159	0.568	195	0.355	231	0.593	267	0.641	303	0.389	339	0.568
16	0.351	52	0.599	88	0.638	124	0.381	160	0.572	196	0.351	232	0.599	268	0.638	304	0.381	340	0.572
17	0.349	53	0.604	89	0.636	125	0.374	161	0.576	197	0.349	233	0.604	269	0.636	305	0.374	341	0.576
18	0.348	54	0.609	90	0.633	126	0.367	162	0.579	198	0.348	234	0.609	270	0.633	306	0.367	342	0.579
19	0.349	55	0.614	91	0.629	127	0.361	163	0.582	199	0.349	235	0.614	271	0.629	307	0.361	343	0.582
20	0.350	56	0.618	92	0.626	128	0.356	164	0.583	200	0.350	236	0.618	272	0.626	308	0.356	344	0.583
21	0.353	57	0.622	93	0.622	129	0.353	165	0.583	201	0.353	237	0.622	273	0.622	309	0.353	345	0.583
22	0.356	58	0.626	94	0.618	130	0.350	166	0.583	202	0.356	238	0.626	274	0.618	310	0.350	346	0.583
23	0.361	59	0.629	95	0.614	131	0.349	167	0.582	203	0.361	239	0.629	275	0.614	311	0.349	347	0.582
24	0.367	60	0.633	96	0.609	132	0.348	168	0.579	204	0.367	240	0.633	276	0.609	312	0.348	348	0.579
25	0.374	61	0.636	97	0.604	133	0.349	169	0.576	205	0.374	241	0.636	277	0.604	313	0.349	349	0.576
26	0.381	62	0.638	98	0.599	134	0.351	170	0.572	206	0.381	242	0.638	278	0.599	314	0.351	350	0.572
27	0.389	63	0.641	99	0.593	135	0.355	171	0.568	207	0.389	243	0.641	279	0.593	315	0.355	351	0.568
28	0.397	64	0.643	100	0.588	136	0.359	172	0.562	208	0.397	244	0.643	280	0.588	316	0.359	352	0.562
29	0.406	65	0.645	101	0.581	137	0.365	173	0.556	209	0.406	245	0.645	281	0.581	317	0.365	353	0.556
30	0.415	66	0.647	102	0.575	138	0.372	174	0.549	210	0.415	246	0.647	282	0.575	318	0.372	354	0.549
31	0.425	67	0.649	103	0.568	139	0.380	175	0.541	211	0.425	247	0.649	283	0.568	319	0.380	355	0.541
32	0.435	68	0.650	104	0.561	140	0.388	176	0.532	212	0.435	248	0.650	284	0.561	320	0.388	356	0.532
33	0.445	69	0.651	105	0.553	141	0.397	177	0.523	213	0.445	249	0.651	285	0.553	321	0.397	357	0.523
34	0.454	70	0.652	106	0.546	142	0.407	178	0.514	214	0.454	250	0.652	286	0.546	322	0.407	358	0.514
35	0.464	71	0.653	107	0.538	143	0.417	179	0.504	215	0.464	251	0.653	287	0.538	323	0.417	359	0.504

This document contains proprietary and confidential information of Dielectric. It is to be used solely for the purpose for which it is provided. No disclosure, reproduction, or use of this document or any part of it may be made without the written permission of Dielectric.



## ELEVATION PATTERN

Proposal No. C-70024  
 Date 12-Feb-17  
 Call Letters WTVX 20  
 Frequency 509 MHz  
 Antenna Type TFU-24JTT/VP P216

RMS Directivity at Main Lobe  
 RMS Directivity at Horizontal

**24.50 ( 13.89 dB )**  
**16.90 ( 12.28 dB )**  
 Calculated

Beam Tilt 0.75 deg  
 Drawing Number 24J245075

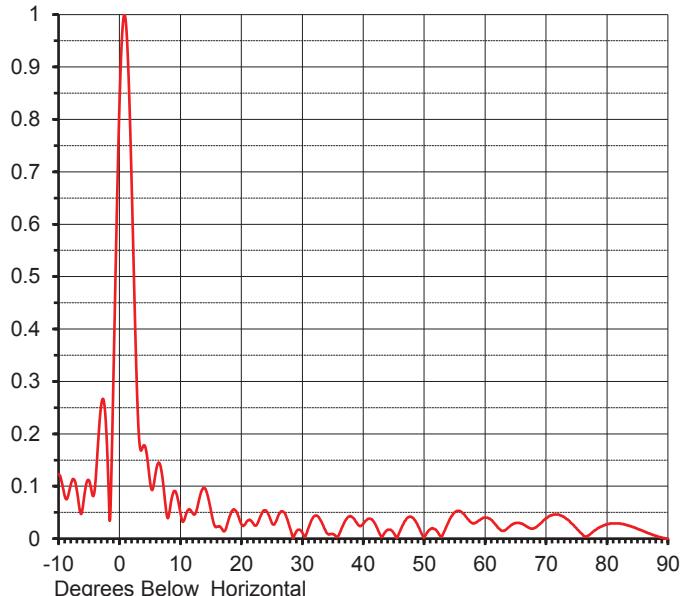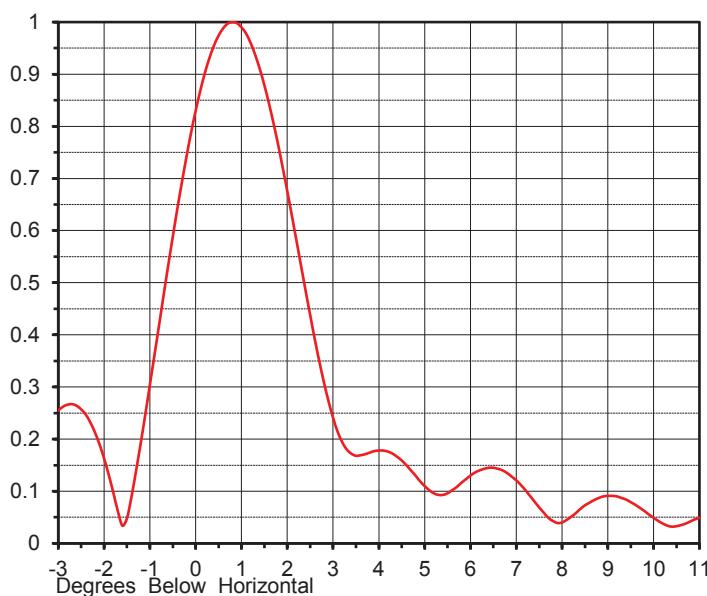

Angle	Field								
-10.0	0.123	10.0	0.049	30.0	0.012	50.0	0.002	70.0	0.039
-9.0	0.082	11.0	0.049	31.0	0.020	51.0	0.018	71.0	0.045
-8.0	0.103	12.0	0.049	32.0	0.043	52.0	0.016	72.0	0.046
-7.0	0.092	13.0	0.071	33.0	0.035	53.0	0.006	73.0	0.041
-6.0	0.062	14.0	0.096	34.0	0.011	54.0	0.032	74.0	0.031
-5.0	0.111	15.0	0.054	35.0	0.009	55.0	0.050	75.0	0.020
-4.0	0.101	16.0	0.023	36.0	0.007	56.0	0.052	76.0	0.008
-3.0	0.255	17.0	0.015	37.0	0.033	57.0	0.040	77.0	0.006
-2.0	0.163	18.0	0.040	38.0	0.042	58.0	0.029	78.0	0.016
-1.0	0.304	19.0	0.054	39.0	0.029	59.0	0.035	79.0	0.023
0.0	0.830	20.0	0.028	40.0	0.028	60.0	0.040	80.0	0.027
1.0	0.990	21.0	0.034	41.0	0.038	61.0	0.036	81.0	0.029
2.0	0.676	22.0	0.028	42.0	0.027	62.0	0.023	82.0	0.029
3.0	0.241	23.0	0.039	43.0	0.003	63.0	0.015	83.0	0.027
4.0	0.178	24.0	0.054	44.0	0.017	64.0	0.023	84.0	0.023
5.0	0.110	25.0	0.030	45.0	0.011	65.0	0.030	85.0	0.019
6.0	0.130	26.0	0.042	46.0	0.013	66.0	0.029	86.0	0.014
7.0	0.121	27.0	0.050	47.0	0.036	67.0	0.022	87.0	0.010
8.0	0.040	28.0	0.020	48.0	0.041	68.0	0.020	88.0	0.005
9.0	0.091	29.0	0.013	49.0	0.024	69.0	0.028	89.0	0.002
									90.0 0.000

This document contains proprietary and confidential information of Dielectric. It is to be used solely for the purpose for which it is provided. No disclosure, reproduction, or use of this document or any part of it may be made without the written permission of Dielectric.

**SUMMARY OF RADIOFREQUENCY  
RADIATION STUDY**  
WTVX, Fort Pierce, FL  
Channel 20, 725 kW, 455.7 m HAAT  
July, 2017

<u>CALL</u>	<u>SERVICE</u>	<u>CHANNEL</u>	<u>FREQUENCY</u>	<u>POLARIZATION</u>	<u>ANTENNA HEIGHT</u>	<u>ERP (kW)</u>	<u>VERT. RELATIVE FIELD FACTOR</u>	<u>WORST-CASE PREDICTED POWER DENSITY (μW/cm²)</u>	<u>FCC UNCONTROLLED LIMIT (μW/cm²)</u>	<u>PERCENT OF UNCONTROLLED LIMIT</u>
WTVX**	DT	20	509	H	454.2	725.000	0.300	10.837	339.33	3.19%
WTVX**	DT	20	509	V	454.2	310.800	0.300	4.645	339.33	1.37%
WDOX-LD	DT	24	533	H	15	6.000	0.300	106.753	355.33	30.04%
WCNO	FM	210	89.9	H & V	183	100.000	<note 1>	115.276	200.00	57.64%
WLDI	FM	238	95.5	H & V	282	100.000	<note 2>	4.972	200.00	2.49%

**TOTAL PERCENTAGE OF FCC GUIDELINE VALUE = 94.73%**

\* For television stations a very conservative vertical relative field factor of 0.3 was assumed pursuant to OET Bulletin 65.

\*\* WTVX is proposing elliptical polarization, the table above includes both the proposed horizontal and vertical power levels

note 1: FM Model Antenna: EPA Type 1; 8-bay, full wave spaced antenna, dipole is worst case assumption

note 2: FM Model Antenna: EPA Type 3; ER1 Rototiller Type, 8-bay, full wave spaced antenna





## WTVX - FORT PIERCE, FLORIDA Longley-Rice Interference Analysis

tvstudy v2.2.2

Database: localhost, Study: WTVX\_20\_ROT\_456H\_725K, Model: Longley-Rice  
Start: 2017.06.02 16:02:06

Study created: 2017.06.02 16:02:00

Study build station data: LMS TV 2017-06-01 (11)

Proposal: WTVX D20 DT LIC FORT PIERCE, FL

File number: WTVX\_20\_ROT\_456H\_725K

Facility ID: 35575

Station data: User record

Record ID: 518

Country: U.S.

Zone: III

Non-U.S. records included

Stations potentially affected:

Call	Chan	Svc	Status	City, State	File Number	Distance
WSBS-CD	D19	DC	BL	MIAMI, ETC., FL	DTVBL29547	127.8 km
WTOG	D19	DT	BL	ST. PETERSBURG, FL	DTVBL74112	201.2
WCWJ	D20	DT	BL	JACKSONVILLE, FL	DTVBL29712	368.9
WZXZ-CD	D20	DC	BL	ORLANDO, ETC., FL	DTVBL70415	180.9
WFNT-DT	D20	DT	BL	TAMPA, FL	DTVBL60559	201.7
WCLF	D21	DT	LIC	CLEARWATER, FL	BLCDT20060627AAQ	200.2
WKME-CD	D21	DC	BL	KISSIMMEE, FL	DTVBL61702	176.4
WPXM-TV	D21	DT	BL	MIAMI, FL	DTVBL48608	127.8

No non-directional AM stations found within 0.8 km

No directional AM stations found within 3.2 km

Record parameters as studied:

Channel: D20  
Latitude: 27 7 20.00 N (NAD83)  
Longitude: 80 23 19.00 W  
Height AMSL: 463.0 m  
HAAT: 455.7 m  
Peak ERP: 725 kW  
Antenna: DIE-TFU-24JTT P216/VP P16 Rot 355 dgs 0.0 deg

39.4 dBu contour:

Azimuth	ERP	HAAT	Distance
0.0 deg	482 kW	455.4 m	107.2 km
45.0	213	458.8	99.5
90.0	253	458.5	101.1
135.0	392	456.1	105.1
180.0	482	455.5	107.2
225.0	213	453.8	99.2
270.0	253	454.2	100.8
315.0	392	454.1	105.0

**Appendix B - Interference Analysis  
WTVX - Fort Pierce, Florida  
Channel 20 - 725 kW - Page 2**

ERP exceeds maximum

ERP: 725 kW    ERP maximum: 644 kW

Proposal service area is within baseline plus 1.0%

Proposal service area population is more than 95.0% of baseline

Distance to Canadian border: 1628.0 km

Distance to Mexican border: 1647.9 km

\*\*Proposal is within coordination distance of FCC monitoring station

\*\*Proposal exceeds field strength limit at FCC monitoring station

Conditions at FCC monitoring station: Vero Beach FL

Bearing: 335.7 degrees    Distance: 59.0 km

ERP: 709 kW    Field strength: 97.8 dBu, 77.8 mV/m

Proposal is not within the West Virginia quiet zone area

Conditions at Table Mountain receiving zone:

Bearing: 308.7 degrees    Distance: 2700.5 km

No land mobile station failures found

Study cell size: 2.00 km

Profile point spacing: 1.00 km

Maximum new IX to full-service and Class A: 0.50%

Maximum new IX to LPTV: 2.00%

---

-----  
Interference to DTVBL29547 BL, scenario 1

Proposal causes no interference.

---

-----  
Interference to DTVBL74112 BL, scenario 1

Proposal causes no interference.

---

-----  
Interference to DTVBL29712 BL, scenario 1

Proposal causes no interference.

---

-----  
Interference to DTVBL70415 BL, scenario 1

Proposal causes no interference.

---

-----  
Interference to DTVBL60559 BL, scenario 1

Desired:	Call	Chan	Svc	Status	City, State	File Number	Distance
	WFTT-DT	D20	DT	BL	TAMPA, FL	DTVBL60559	
Undesireds:	WTVX	D20	DT	BL	FORT PIERCE, FL	DTVBL35575	201.7 km
	WTVX	D20	DT	LIC	FORT PIERCE, FL	WTVX_20_ROT_456H_725K	201.7
	WTOG	D19	DT	BL	ST. PETERSBURG, FL	DTVBL74112	2.0
	WCWJ	D20	DT	BL	JACKSONVILLE, FL	DTVBL29712	278.5
	WZXZ-CD	D20	DC	BL	ORLANDO, ETC., FL	DTVBL70415	129.0
	WCTV	D20	DT	BL	THOMASVILLE, GA	DTVBL31590	353.4
	WCLF	D21	DT	LIC	CLEARWATER, FL	BLCDT20060627AAQ	3.1
	WDYB-CD	D21	DC	BL	DAYTONA BEACH, FL	DTVBL41375	157.8

## Appendix B - Interference Analysis

WTVX - Fort Pierce, Florida

Channel 20 - 725 kW - Page 3

WKME-CD	D21	DC	BL	KISSIMMEE, FL	DTVBL61702	93.0
Service area	Terrain-limited			IX-free, before	IX-free, after	Percent New IX
27773.3	4,283,915	27765.2	4,283,854	27232.2	4,239,006	27228.3
<hr/>						
Undesired		Total IX		Unique IX, before	Unique IX, after	
WTVX D20 DT BL	383.8	20,803	246.3	14,099	250.2	14,103
WTVX D20 DT LIC	387.7	20,807				
WTG D19 DT BL	117.0	20,577	100.8	19,477	100.8	19,477
WCWJ D20 DT BL	24.1	527	8.0	427	8.0	427
WZXZ-CD D20 DC BL	4.0	91	0.0	0	0.0	0
WCTV D20 DT BL	12.1	69	0.0	0	0.0	0
WCLF D21 DT LIC	8.1	1,677	8.1	1,677	8.1	1,677
WKME-CD D21 DC BL	137.4	8,977	24.2	1,301	24.2	1,301

-----

Interference to BLCDT20060627AAQ LIC, scenario 1

Proposal causes no interference.

-----

Interference to DTVBL61702 BL, scenario 1

Proposal causes no interference.

-----

Interference to DTVBL48608 BL, scenario 1

Proposal causes no interference.

-----

Interference to proposal, scenario 1

7.27% interference

Desired:	Call	Chan	Svc	Status	City, State	File Number	Distance
	WTVX	D20	DT	LIC	FORT PIERCE, FL	WTVX_20_ROT_456H_725K	
Undesireds:	WSBS-CD	D19	DC	BL	MIAMI, ETC., FL	DTVBL29547	127.8 km
	WCWJ	D20	DT	BL	JACKSONVILLE, FL	DTVBL29712	368.9
	WZXZ-CD	D20	DC	BL	ORLANDO, ETC., FL	DTVBL70415	180.9
	WFNT-DT	D20	DT	BL	TAMPA, FL	DTVBL60559	201.7
	WKME-CD	D21	DC	BL	KISSIMMEE, FL	DTVBL61702	176.4
	WPXM-TV	D21	DT	BL	MIAMI, FL	DTVBL48608	127.8

Service area	Terrain-limited			IX-free	Percent IX
33088.9	2,962,941	33088.9	2,962,941	32889.2	2,747,431

Undesired	Total IX	Unique IX	Prcnt Unique IX
WSBS-CD D19 DC BL	24.0	30,963	0.0
WFNT-DT D20 DT BL	55.6	3,967	51.6
WPXM-TV D21 DT BL	148.1	215,445	124.1