

## **EXHIBIT**

### **2ND ADJACENT CHANNEL INTERFERENCE WAIVER REQUEST**


The proposed facilities are not compliant with the 2nd adjacent channel spacing requirement in relation to at least one full-power FM facility, application or construction permit. As is shown by the analyses presented within this exhibit, no population is located within any region of interference caused by the proposed facilities to the existing stations either because the region does not extend far enough radially to encounter a populated area, exists entirely sufficiently above the ground to avoid populated areas, or a combination of both. Since no population will be subjected to interference, a waiver of the 2nd adjacent channel spacing requirements is requested.

## INTERFERENCE DETERMINATION PROCEDURE

The following procedure was used to predict the region of interference caused to any existing 2nd adjacent station by the proposed facilities:

1. The distance and bearing from the existing transmitter to the proposed transmitter was determined.
2. The height above average terrain of the existing station's antenna in the direction of the proposed transmitter was determined.
3. The F(50,50) curves were used to determine the existing station's protected field strength at the proposed transmitter site.
4. A 40 dB protection factor was added to the existing station's protected field to determine the maximum allowed proposed facilities' interfering field on a second adjacent channel.
5. For a particular elevation angle,  $\phi$ , the proposed facilities' maximum ERP (60.0 W) was scaled by the square of the antenna voltage gain to determine the ERP at this angle. Antenna voltage gain versus elevation angle was taken from the manufacturer data sheet (attached) for a 2-bay, half-wave spaced antenna system.
6. The free-space equation was used to determine the distance,  $\rho$ , from the proposed facilities' center of radiation to the maximum allowed interfering field contour at this elevation angle.
7. Radial displacement from the center of radiation,  $\Delta r$ , and vertical displacement from the center of radiation,  $\Delta z$ , were computed.
8. Height of this contour point above ground,  $\Delta h$ , was computed by subtracting  $\Delta z$  from 128.0, the height of the proposed facilities' center of radiation above ground.
9. Steps 5 through 8 were repeated for the complete range of elevation angles, tabulated, and plotted on an elevation diagram.

The following figure depicts the procedure for producing an elevation diagram.

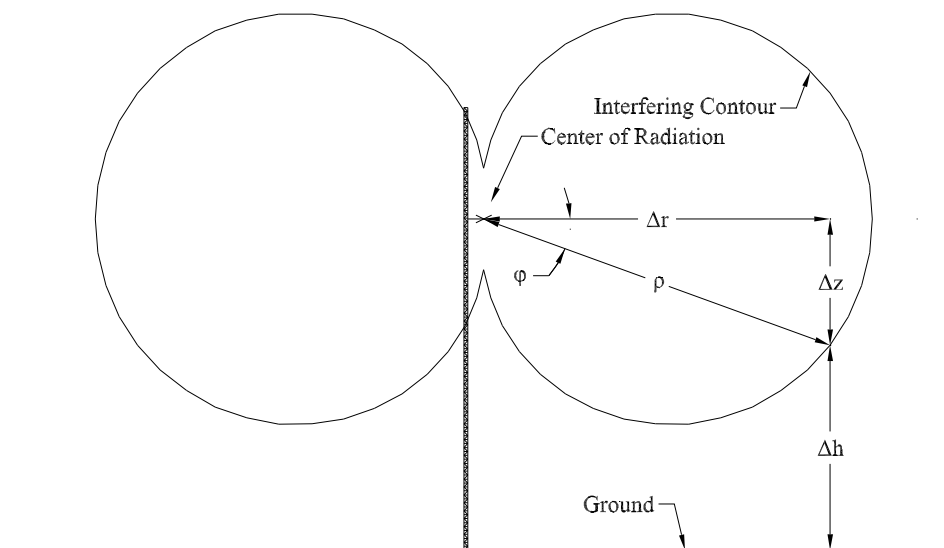

# INTERFERENCE CAUSED TO W273CY

## Protected Station Details

Callsign.....W273CY  
 File Number.....BLFT-20170602AAG  
 Record Type.....LIC  
 Community of License.....JACKSON, MS  
 Latitude (NAD27).....32-16-51 N  
 Longitude (NAD27).....090-17-38 W  
 Channel.....273D  
 Effective Radiated Power.....0.250 kW  
 Antenna Height above Average Terrain.....0 m

## Analysis


Azimuth from W273CY Transmitter to Proposed Transmitter.....46°  
 W273CY HAAT in direction of Proposed Transmitter.....294.1 m  
 W273CY ERP in direction of Proposed Transmitter.....0.25 kW  
 Distance from W273CY Transmitter to Proposed Transmitter.....17.01 km  
 W273CY F(50,50) Protected Field at Proposed Transmitter.....64.76 dB $\mu$   
 Protection Ratio.....40.00 dB  
 Interfering Contour of Proposed Transmitter.....104.76 dB $\mu$

Elevation Angle [deg]	Antenna Voltage Gain	Effective Radiated Power [W]	Field [dB $\mu$ ]	$\rho$ [m]	$\Delta r$ [m]	$\Delta z$ [m]	$\Delta h$ [m]
0	1.000	60.0	104.76	314.0	314.0	0.0	128.0
-5	0.988	58.6	104.76	310.2	309.0	27.0	101.0
-10	0.952	54.4	104.76	298.9	294.4	51.9	76.1
-15	0.881	46.6	104.76	276.6	267.2	71.6	56.4
-20	0.791	37.5	104.76	248.4	233.4	84.9	43.1
-25	0.686	28.2	104.76	215.4	195.2	91.0	37.0
-30	0.577	20.0	104.76	181.2	156.9	90.6	37.4
-35	0.463	12.9	104.76	145.4	119.1	83.4	44.6
-40	0.354	7.5	104.76	111.2	85.1	71.4	56.6
-45	0.256	3.9	104.76	80.4	56.8	56.8	71.2
-50	0.174	1.8	104.76	54.6	35.1	41.9	86.1
-55	0.110	0.7	104.76	34.5	19.8	28.3	99.7
-60	0.061	0.2	104.76	19.2	9.6	16.6	111.4
-65	0.028	0.0	104.76	8.8	3.7	8.0	120.0
-70	0.007	0.0	104.76	2.2	0.8	2.1	125.9
-75	0.004	0.0	104.76	1.3	0.3	1.2	126.8
-80	0.008	0.0	104.76	2.5	0.4	2.5	125.5
-85	0.008	0.0	104.76	2.5	0.2	2.5	125.5
-90	0.009	0.0	104.76	2.8	0.0	2.8	125.2

## INTERFERENCE CAUSED TO W273CY

### Protected Station Details

Callsign.....W273CY  
File Number.....BLFT-20170602AAG  
Record Type.....LIC  
Community of License.....JACKSON, MS  
Latitude (NAD27).....32-16-51 N  
Longitude (NAD27).....090-17-38 W  
Channel.....273D  
Effective Radiated Power.....0.250 kW  
Antenna Height above Average Terrain.....0 m

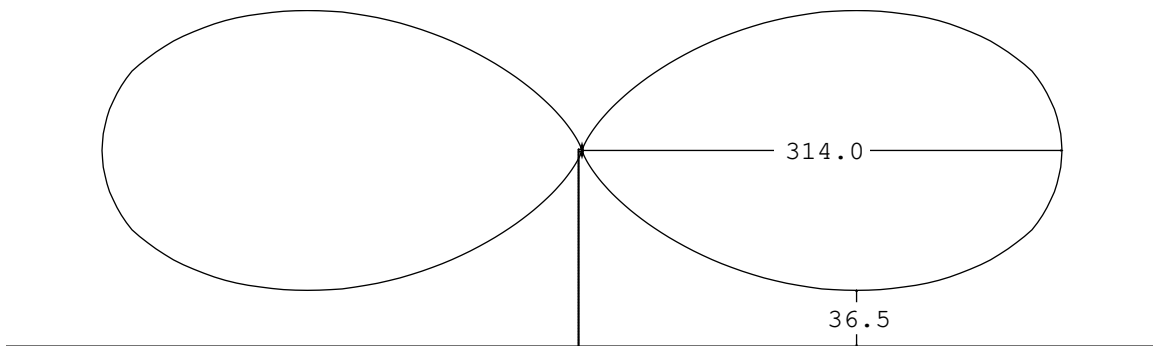

## INTERFERENCE CAUSED TO W273CY

### Protected Station Details

Callsign.....W273CY  
File Number.....BLFT-20170602AAG  
Record Type.....LIC  
Community of License.....JACKSON, MS  
Latitude (NAD27).....32-16-51 N  
Longitude (NAD27).....090-17-38 W  
Channel.....273D  
Effective Radiated Power.....0.250 kW  
Antenna Height above Average Terrain.....0 m



# INTERFERENCE CAUSED TO WYOY

## Protected Station Details

Callsign.....WYOY  
 File Number.....BLH-20150408AAE  
 Record Type.....LIC  
 Community of License.....GLUCKSTADT, MS  
 Latitude (NAD27).....32-23-13 N  
 Longitude (NAD27).....090-09-47 W  
 Channel.....269C2  
 Effective Radiated Power.....50.000 kW  
 Antenna Height above Average Terrain.....123 m

## Analysis


Azimuth from WYOY Transmitter to Proposed Transmitter.....153°  
 WYOY HAAT in direction of Proposed Transmitter.....124.8 m  
 WYOY ERP in direction of Proposed Transmitter.....42.49 kW  
 Distance from WYOY Transmitter to Proposed Transmitter.....0.02 km  
 WYOY F(50,50) Protected Field at Proposed Transmitter.....158.45 dB $\mu$   
 Protection Ratio.....40.00 dB  
 Interfering Contour of Proposed Transmitter.....198.45 dB $\mu$

Elevation Angle [deg]	Antenna Voltage Gain	Effective Radiated Power [W]	Field [dB $\mu$ ]	$\rho$ [m]	$\Delta r$ [m]	$\Delta z$ [m]	$\Delta h$ [m]
0	1.000	60.0	198.45	0.0	0.0	0.0	128.0
-5	0.988	58.6	198.45	0.0	0.0	0.0	128.0
-10	0.952	54.4	198.45	0.0	0.0	0.0	128.0
-15	0.881	46.6	198.45	0.0	0.0	0.0	128.0
-20	0.791	37.5	198.45	0.0	0.0	0.0	128.0
-25	0.686	28.2	198.45	0.0	0.0	0.0	128.0
-30	0.577	20.0	198.45	0.0	0.0	0.0	128.0
-35	0.463	12.9	198.45	0.0	0.0	0.0	128.0
-40	0.354	7.5	198.45	0.0	0.0	0.0	128.0
-45	0.256	3.9	198.45	0.0	0.0	0.0	128.0
-50	0.174	1.8	198.45	0.0	0.0	0.0	128.0
-55	0.110	0.7	198.45	0.0	0.0	0.0	128.0
-60	0.061	0.2	198.45	0.0	0.0	0.0	128.0
-65	0.028	0.0	198.45	0.0	0.0	0.0	128.0
-70	0.007	0.0	198.45	0.0	0.0	0.0	128.0
-75	0.004	0.0	198.45	0.0	0.0	0.0	128.0
-80	0.008	0.0	198.45	0.0	0.0	0.0	128.0
-85	0.008	0.0	198.45	0.0	0.0	0.0	128.0
-90	0.009	0.0	198.45	0.0	0.0	0.0	128.0

# INTERFERENCE CAUSED TO WYOY

## Protected Station Details

Callsign.....WYOY  
File Number.....BLH-20150408AAE  
Record Type.....LIC  
Community of License.....GLUCKSTADT, MS  
Latitude (NAD27).....32-23-13 N  
Longitude (NAD27).....090-09-47 W  
Channel.....269C2  
Effective Radiated Power.....50.000 kW  
Antenna Height above Average Terrain.....123 m

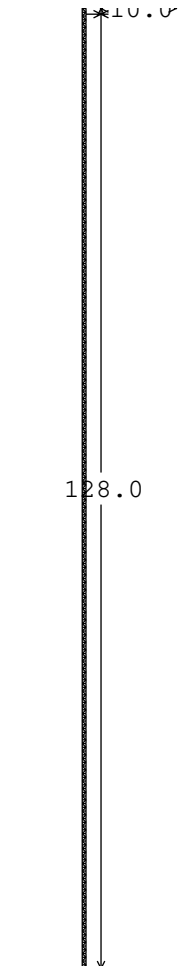

## INTERFERENCE CAUSED TO WYOY

### Protected Station Details

Callsign.....WYOY  
File Number.....BLH-20150408AAE  
Record Type.....LIC  
Community of License.....GLUCKSTADT, MS  
Latitude (NAD27).....32-23-13 N  
Longitude (NAD27).....090-09-47 W  
Channel.....269C2  
Effective Radiated Power.....50.000 kW  
Antenna Height above Average Terrain.....123 m





# ANTENNA ELEVATION PATTERN

