

Statement of Hammett & Edison, Inc., Consulting Engineers

The firm of Hammett & Edison, Inc., Consulting Engineers, has been retained on behalf of FM Translator K202CT, Channel 202, 88.3 MHz, Santa Rosa, California, to evaluate its licensed facility located at Mt. Barham in Sonoma County, for compliance with appropriate guidelines limiting human exposure to radio frequency (“RF”) electromagnetic fields.

Prevailing Exposure Standard

The U.S. Congress requires that the Federal Communications Commission (“FCC”) evaluate its actions for possible significant impact on the environment. In Docket 93-62, effective October 15, 1997, the FCC adopted the human exposure limits for field strength and power density recommended in Report No. 86, “Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” published in 1986 by the Congressionally chartered National Council on Radiation Protection and Measurements (“NCRP”). Separate limits apply for occupational and public exposure conditions, with the latter limits generally five times more restrictive. The more recent standard, developed by the Institute of Electrical and Electronics Engineers IEEE C95.1-2019, “IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz,” includes similar exposure limits. A summary of the FCC’s exposure limits is shown in Figure 1. These limits apply for continuous exposures and are intended to provide a prudent margin of safety for all persons, regardless of age, gender, size, or health.

Computer Modeling Method

The FCC provides direction for determining compliance in its Office of Engineering and Technology Bulletin No. 65, “Evaluating Compliance with FCC-Specified Guidelines for Human Exposure to Radio Frequency Radiation,” dated August 1997. Figure 2 describes the calculation methodologies, reflecting the facts that a directional antenna’s radiation pattern is not fully formed at locations very close by (the “near-field” effect) and that at greater distances the power level from an energy source decreases with the square of the distance from it (the “inverse square law”). This methodology is an industry standard for evaluating RF exposure conditions and has been demonstrated through numerous field tests to be a conservative prediction of exposure levels.

Site and Facility Description

Based on information provided by K202CT, it presently has installed an ERI Model 100A-1M, single-bay omnidirectional antenna on a 220-foot guyed lattice tower located at Mt. Barham, off Calistoga Road in unincorporated Sonoma County. The antenna employs no downtilt and is mounted at an effective height of about 61 feet above ground. The maximum effective radiated power in any



direction is 10 watts each in the horizontal and vertical polarizations. Located on the tower are antennas for use by other broadcast and wireless telecommunications operators.

Study Results

For a person anywhere at ground, the maximum RF exposure level due to the K202CT operation is calculated to be 0.0019 mW/cm², which is 0.95% of the applicable public exposure limit. It should be noted that this result includes several “worst-case” assumptions and therefore is expected to overstate actual power density levels from the operation. Since the maximum calculated RF exposure level is less than 5% of the FCC public limit, it is therefore excluded under Section 1.1307(b)(5) of the FCC Rules from having to consider the contributions of other stations at the site in establishing its own compliance with the FCC exposure limits.

Recommended Mitigation Measures

Due to its mounting location and height, the K202CT antenna is not accessible to unauthorized persons, and so no measures are necessary to comply with the FCC public exposure guidelines. To prevent occupational exposures in excess of the FCC guidelines, it is recommended that appropriate RF safety training, to include review of personal monitor use and lockout/tagout procedures, be provided to all authorized personnel who have access to the tower, including employees and contractors of K202CT, of the other FCC licensees, and of the property owner. No access directly in front of the K202CT antenna itself, such as might occur during certain maintenance activities on the tower, should be allowed while it is in operation, unless other measures can be demonstrated to ensure that occupational protection requirements are met. It is recommended that explanatory signs* be posted on the tower at or below the antenna, readily visible from any angle of approach to persons who might need to work there.

Conclusion

Based on the information and analysis above, it is the undersigned’s professional opinion that the K202CT operation in Sonoma County, California, will comply with the prevailing standards for limiting public exposure to radio frequency energy and, therefore, will not for this reason cause a significant impact on the environment. The highest calculated level in publicly accessible areas is much less than the prevailing standards allow for exposures of unlimited duration. Training authorized personnel and posting explanatory signs are recommended to establish compliance with occupational exposure limits.

* Signs should comply with OET-65 color, symbol, and content recommendations. Contact information should be provided (e.g., a telephone number) to arrange for access to restricted areas. The selection of language(s) is not an engineering matter, and guidance from the landlord, local zoning or health authority, or appropriate professionals may be required.

Authorship

The undersigned author of this statement is a qualified Professional Engineer, holding California Registration No. E-18063, which expires on June 30, 2023. This work has been carried out under his direction, and all statements are true and correct of his own knowledge except, where noted, when data has been supplied by others, which data he believes to be correct.



Rajat Mathur
Rajat Mathur, P.E.
707/996-5200


July 6, 2021

FCC Radio Frequency Protection Guide

The U.S. Congress required (1996 Telecom Act) the Federal Communications Commission (“FCC”) to adopt a nationwide human exposure standard to ensure that its licensees do not, cumulatively, have a significant impact on the environment. The FCC adopted the limits from Report No. 86, “Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” published in 1986 by the Congressionally chartered National Council on Radiation Protection and Measurements (“NCRP”). Separate limits apply for occupational and public exposure conditions, with the latter limits generally five times more restrictive. The more recent standard, developed by the Institute of Electrical and Electronics Engineers and approved as American National Standard ANSI/IEEE C95.1-2006, “Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz,” includes similar limits. These limits apply for continuous exposures from all sources and are intended to provide a prudent margin of safety for all persons, regardless of age, gender, size, or health.

As shown in the table and chart below, separate limits apply for occupational and public exposure conditions, with the latter limits (in *italics* and/or dashed) up to five times more restrictive:

| Frequency Applicable Range (MHz) | Electromagnetic Fields (f is frequency of emission in MHz) | | | | | |
|---|--|----------------|-------------------------------------|---------------|--|--------------------------|
| | Electric Field Strength (V/m) | | Magnetic Field Strength (A/m) | | Equivalent Far-Field Power Density (mW/cm ²) | |
| 0.3 – 1.34 | 614 | <i>614</i> | 1.63 | <i>1.63</i> | 100 | <i>100</i> |
| 1.34 – 3.0 | 614 | <i>823.8/f</i> | 1.63 | <i>2.19/f</i> | 100 | <i>180/f²</i> |
| 3.0 – 30 | 1842/f | <i>823.8/f</i> | 4.89/f | <i>2.19/f</i> | 900/f ² | <i>180/f²</i> |
| 30 – 300 | 61.4 | <i>27.5</i> | 0.163 | <i>0.0729</i> | 1.0 | <i>0.2</i> |
| 300 – 1,500 | 3.54√f | <i>1.59√f</i> | √f/106 | <i>√f/238</i> | f/300 | <i>f/1500</i> |
| 1,500 – 100,000 | 137 | <i>61.4</i> | 0.364 | <i>0.163</i> | 5.0 | <i>1.0</i> |

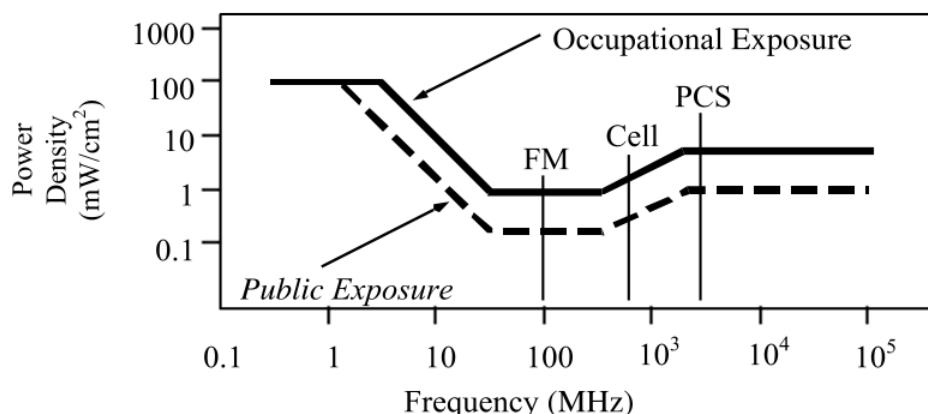

Higher levels are allowed for short periods of time, such that total exposure levels averaged over six or thirty minutes, for occupational or public settings, respectively, do not exceed the limits, and higher levels also are allowed for exposures to small areas, such that the spatially averaged levels do not exceed the limits. However, neither of these allowances is incorporated in the conservative calculation formulas in the FCC Office of Engineering and Technology Bulletin No. 65 (August 1997) for projecting field levels. Hammett & Edison has incorporated those formulas in a computer program capable of calculating, at thousands of locations on an arbitrary grid, the total expected power density from any number of individual radio frequency sources. The program allows for the inclusion of uneven terrain in the vicinity, as well as any number of nearby buildings of varying heights, to obtain more accurate projections.



RFR.CALC™ Calculation Methodology

Assessment by Calculation of Compliance with FCC Exposure Guidelines

The U.S. Congress required (1996 Telecom Act) the Federal Communications Commission (“FCC”) to adopt a nationwide human exposure standard to ensure that its licensees do not, cumulatively, have a significant impact on the environment. The maximum permissible exposure limits adopted by the FCC (see Figure 1) apply for continuous exposures from all sources and are intended to provide a prudent margin of safety for all persons, regardless of age, gender, size, or health. Higher levels are allowed for short periods of time, such that total exposure levels averaged over six or thirty minutes, for occupational or public settings, respectively, do not exceed the limits.

Near Field.

Prediction methods have been developed for the near field zone of panel (directional) and whip (omnidirectional) antennas, typical at wireless telecommunications base stations, as well as dish (aperture) antennas, typically used for microwave links. The antenna patterns are not fully formed in the near field at these antennas, and the FCC Office of Engineering and Technology Bulletin No. 65 (August 1997) gives suitable formulas for calculating power density within such zones.

For a panel or whip antenna, power density $S = \frac{180}{\theta_{BW}} \times \frac{0.1 \times P_{net}}{\pi \times D \times h}$, in mW/cm²,

and for an aperture antenna, maximum power density $S_{max} = \frac{0.1 \times 16 \times \eta \times P_{net}}{\pi \times h^2}$, in mW/cm²,

where θ_{BW} = half-power beamwidth of antenna, in degrees,

P_{net} = net power input to antenna, in watts,

D = distance from antenna, in meters,

h = aperture height of antenna, in meters, and

η = aperture efficiency (unitless, typically 0.5-0.8).

The factor of 0.1 in the numerators converts to the desired units of power density.

Far Field.

OET-65 gives this formula for calculating power density in the far field of an individual RF source:

power density $S = \frac{2.56 \times 1.64 \times 100 \times RFF^2 \times ERP}{4 \times \pi \times D^2}$, in mW/cm²,

where ERP = total ERP (all polarizations), in kilowatts,

RFF = three-dimensional relative field factor toward point of calculation, and

D = distance from antenna effective height to point of calculation, in meters.

The factor of 2.56 accounts for the increase in power density due to ground reflection, assuming a reflection coefficient of 1.6 (1.6 x 1.6 = 2.56). The factor of 1.64 is the gain of a half-wave dipole relative to an isotropic radiator. The factor of 100 in the numerator converts to the desired units of power density. This formula is used in a computer program capable of calculating, at thousands of locations on an arbitrary grid, the total expected power density from any number of individual radio frequency sources. The program also allows for the inclusion of uneven terrain in the vicinity, as well as any number of nearby buildings of varying heights, to obtain more accurate projections.

