

EXHIBIT 13.2  
(Page 1 of 10)

PROPOSED NIGHTTIME FACILITIES  
Homeslice Media Group, LLC.  
Rapid City, SD

The proposed KKLS nighttime facilities will operate nondirectionally at a power level of 0.065 kilowatts using Tower #2 of the existing directional antenna system. Other than removing the other directional tower, no physical construction will be required to implement the proposed modifications.

Table 13.2.0 presents a complete description of the proposed modified KKLS nighttime antenna system. Table 13.2.1 presents the projection of the present KKLS nighttime service contours. Table 13.2.2 lists the proposed KKLS nighttime service contours. These contours were projected using measured conductivity data from the KKLS 1978 daytime full proof of performance, which is shown in Appendix A to this exhibit, supplemented with conductivity data extracted from FCC Figure M3 in areas where this measured conductivity data was not applicable.

Figure 13.2.0 depicts the KKLS present and proposed 1000 mV/m nighttime contours. Figure 13.2.1 shows the KKLS present and proposed nighttime “interference-free” contours. As a Class D station KKLS won’t be required to provide any minimum level of coverage to Rapid City, its community of license.

TABLE 13.2.0

PROPOSED KKLS NIGHTTIME  
NONDIRECTIONAL ANTENNA SYSTEM

Homeslice Media Group, LLC.  
Rapid City, SD

Power:	65 Watts nondirectional
Type of element:	Vertical, uniform cross section, guyed and base insulated, series excited.
Height above insulators:	89.2° electrical, 265' (80.8 m) physical
Overall height above ground:	273' (83.1m) AGL, 400' (1036.2m) MSL
Antenna Structure Registration Number:	1042157
Ground system:	120 equally spaced radials of #10 AWG copper wire, each 80.8 meters in length, with 120 interspersed radials of #10 AWG copper wire, each 15.3 meters in length, buried approximately 10 cm deep about the tower.
Predicted efficiency:	305.2 mV/m/KW at 1 km RMS
Location: (NAD83)	North Latitude: 44° 03' 42.0" West Longitude: 103° 10' 36.0"

TABLE 13.2.1

PRESENT KKLS NIGHTTIME  
SERVICE CONTOURS  
Homeslice Media Group, LLC.  
Rapid City, SD

<u>Azimuth (Degrees)</u>	<u>Radiation (mV/m at 1 km)</u>	<u>Conductivities (mmhos/m/ending distance (km))</u>	<u>1000 mV/m Contour (km)</u>	<u>12.736 mV/m Contour (km)</u>
0	90.1	15*	0.09	6.32
5	82.9	15*	0.08	5.86
10	75.8	15*	0.08	5.40
15	69.1	15*	0.07	4.96
20	62.9	15*	0.06	4.54
25	57.4	15	0.06	4.17
30	52.8	15	0.05	3.86
35	49.1	15	0.05	3.60
40	46.3	15	0.05	3.41
45	44.4	15	0.04	3.27
50	43.2	15	0.04	3.19
55	42.6	15	0.04	3.15
60	42.3	15	0.04	3.13
65	42.2	10*	0.04	3.02
70	42.2	10*	0.04	3.02
75	42.2	10*	0.04	3.02
80	42.2	10*	0.04	3.02
85	42.3	15	0.04	3.13
90	42.6	15	0.04	3.15
95	43.2	15	0.04	3.19
100	44.4	15	0.04	3.27
105	46.3	15	0.05	3.41
110	49.1	10*	0.05	3.47
115	52.8	10*	0.05	3.71
120	57.4	10*	0.06	4.01
125	62.9	10*	0.06	4.35

TABLE 13.2.1 (cont'd)

<u>Azimuth (Degrees)</u>	<u>Radiation (mV/m at 1 km)</u>	<u>Conductivities (mmhos/m/ending distance (km))</u>	<u>1000 mV/m Contour (km)</u>	<u>5.806 mV/m Contour (km)</u>
130	69.1	15	0.07	4.96
135	75.8	15	0.08	5.40
140	82.9	15	0.08	5.86
145	90.1	15	0.09	6.32
150	97.3	15	0.10	6.77
155	104.2	15	0.10	7.20
160	110.8	15	0.11	7.60
165	116.9	15	0.12	7.97
170	122.4	15	0.12	8.30
175	127.2	15*	0.13	8.58
180	131.2	15*	0.13	8.82
185	134.5	15*	0.13	9.01
190	137.0	15*	0.14	9.16
195	138.8	15*	0.14	9.27
200	140.0	15	0.14	9.34
205	140.6	15	0.14	9.37
210	140.8	15	0.14	9.38
215	140.6	15*	0.14	9.37
220	140.1	15*	0.14	9.34
225	139.5	15*	0.14	9.31
230	138.8	15*	0.14	9.27
235	138.2	15*	0.14	9.23
240	137.6	15	0.14	9.20
245	137.2	5*	0.13	7.12
250	137.0	5*	0.13	7.12
255	137.0	5*	0.13	7.12
260	137.2	5*	0.13	7.12
265	137.6	15	0.14	9.20
270	138.2	15	0.14	9.23

TABLE 13.2.1 (cont'd)

<u>Azimuth (Degrees)</u>	<u>Radiation (mV/m at 1 km)</u>	<u>Conductivities (mmhos/m/ending distance (km))</u>	<u>1000 mV/m Contour (km)</u>	<u>5.806 mV/m Contour (km)</u>
275	138.8	15	0.14	9.27
280	139.5	15	0.14	9.31
285	140.1	15	0.14	9.34
290	140.6	5*	0.14	7.25
295	140.8	5*	0.14	7.26
300	140.6	5*	0.14	7.25
305	140.0	5*	0.14	7.23
310	138.8	5*	0.14	7.18
315	137.0	15	0.14	9.16
320	134.5	15	0.13	9.01
325	131.2	10*	0.13	8.23
330	127.2	10*	0.13	8.02
335	122.4	10*	0.12	7.77
340	116.9	10*	0.12	7.47
345	110.8	10*	0.11	7.14
350	104.2	15	0.10	7.20
355	97.3	15	0.10	6.77

\* Measured conductivity data extracted from KKLS 1978 full proof of performance (BL-14492) and reproduced in Appendix A to this exhibit.

All other conductivity data extracted from FCC figure M3.

TABLE 13.2.2

PROPOSED KKLS NIGHTTIME  
SERVICE CONTOURS  
Homeslice Media Group, LLC.  
Rapid City, SD

<u>Azimuth (Degrees)</u>	<u>Radiation (mV/m at 1 km)</u>	<u>Conductivities (mmhos/m/ending distance (km))</u>	<u>1000 mV/m Contour (km)</u>	<u>12.736 mV/m Contour (km)</u>
0	77.8	15*	0.08	5.52
5	77.8	15*	0.08	5.52
10	77.8	15*	0.08	5.52
15	77.8	15*	0.08	5.52
20	77.8	15*	0.08	5.52
25	77.8	15	0.08	5.52
30	77.8	15	0.08	5.52
35	77.8	15	0.08	5.52
40	77.8	15	0.08	5.52
45	77.8	15	0.08	5.52
50	77.8	15	0.08	5.52
55	77.8	15	0.08	5.52
60	77.8	15	0.08	5.52
65	77.8	10*	0.08	5.26
70	77.8	10*	0.08	5.26
75	77.8	10*	0.08	5.26
80	77.8	10*	0.08	5.26
85	77.8	15	0.08	5.52
90	77.8	15	0.08	5.52
95	77.8	15	0.08	5.52
100	77.8	15	0.08	5.52
105	77.8	15	0.08	5.52
110	77.8	10*	0.08	5.26
115	77.8	10*	0.08	5.26
120	77.8	10*	0.08	5.26
125	77.8	10*	0.08	5.26

TABLE 13.2.2 (cont'd)

<u>Azimuth (Degrees)</u>	<u>Radiation (mV/m at 1 km)</u>	<u>Conductivities (mmhos/m/ending distance (km))</u>	<u>1000 mV/m Contour (km)</u>	<u>5.809 mV/m Contour (km)</u>
130	77.8	15	0.08	5.52
135	77.8	15	0.08	5.52
140	77.8	15	0.08	5.52
145	77.8	15	0.08	5.52
150	77.8	15	0.08	5.52
155	77.8	15	0.08	5.52
160	77.8	15	0.08	5.52
165	77.8	15	0.08	5.52
170	77.8	15	0.08	5.52
175	77.8	15*	0.08	5.52
180	77.8	15*	0.08	5.52
185	77.8	15*	0.08	5.52
190	77.8	15*	0.08	5.52
195	77.8	15*	0.08	5.52
200	77.8	15	0.08	5.52
205	77.8	15	0.08	5.52
210	77.8	15	0.08	5.52
215	77.8	15*	0.08	5.52
220	77.8	15*	0.08	5.52
225	77.8	15*	0.08	5.52
230	77.8	15*	0.08	5.52
235	77.8	15*	0.08	5.52
240	77.8	15	0.08	5.52
245	77.8	5*	0.08	4.58
250	77.8	5*	0.08	4.58
255	77.8	5*	0.08	4.58
260	77.8	5*	0.08	4.58
265	77.8	15	0.08	5.52
270	77.8	15	0.08	5.52


TABLE 13.2.2 (cont'd)

<u>Azimuth (Degrees)</u>	<u>Radiation (mV/m at 1 km)</u>	<u>Conductivities (mmhos/m/ending distance (km))</u>	<u>1000 mV/m Contour (km)</u>	<u>5.809 mV/m Contour (km)</u>
275	77.8	15	0.08	5.52
280	77.8	15	0.08	5.52
285	77.8	15	0.08	5.52
290	77.8	5*	0.08	4.58
295	77.8	5*	0.08	4.58
300	77.8	5*	0.08	4.58
305	77.8	5*	0.08	4.58
310	77.8	5*	0.08	4.58
315	77.8	15	0.08	5.52
320	77.8	15	0.08	5.52
325	77.8	10*	0.08	5.26
330	77.8	10*	0.08	5.26
335	77.8	10*	0.08	5.26
340	77.8	10*	0.08	5.26
345	77.8	10*	0.08	5.26
350	77.8	15	0.08	5.52
355	77.8	15	0.08	5.52

\* Measured conductivity data extracted from KKLS 1978 full proof of performance (BL-14492) and reproduced in Appendix A to this exhibit.

All other conductivity data extracted from FCC figure M3.



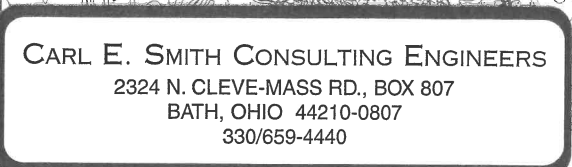


**FIG. 13.2.0**

**KKLS PRESENT AND PROPOSED  
1,000 mV/m NIGHTTIME CONTOURS**

---

**HOMESLICE MEDIA GROUP, LLC.**  
**Rapid City, SD**

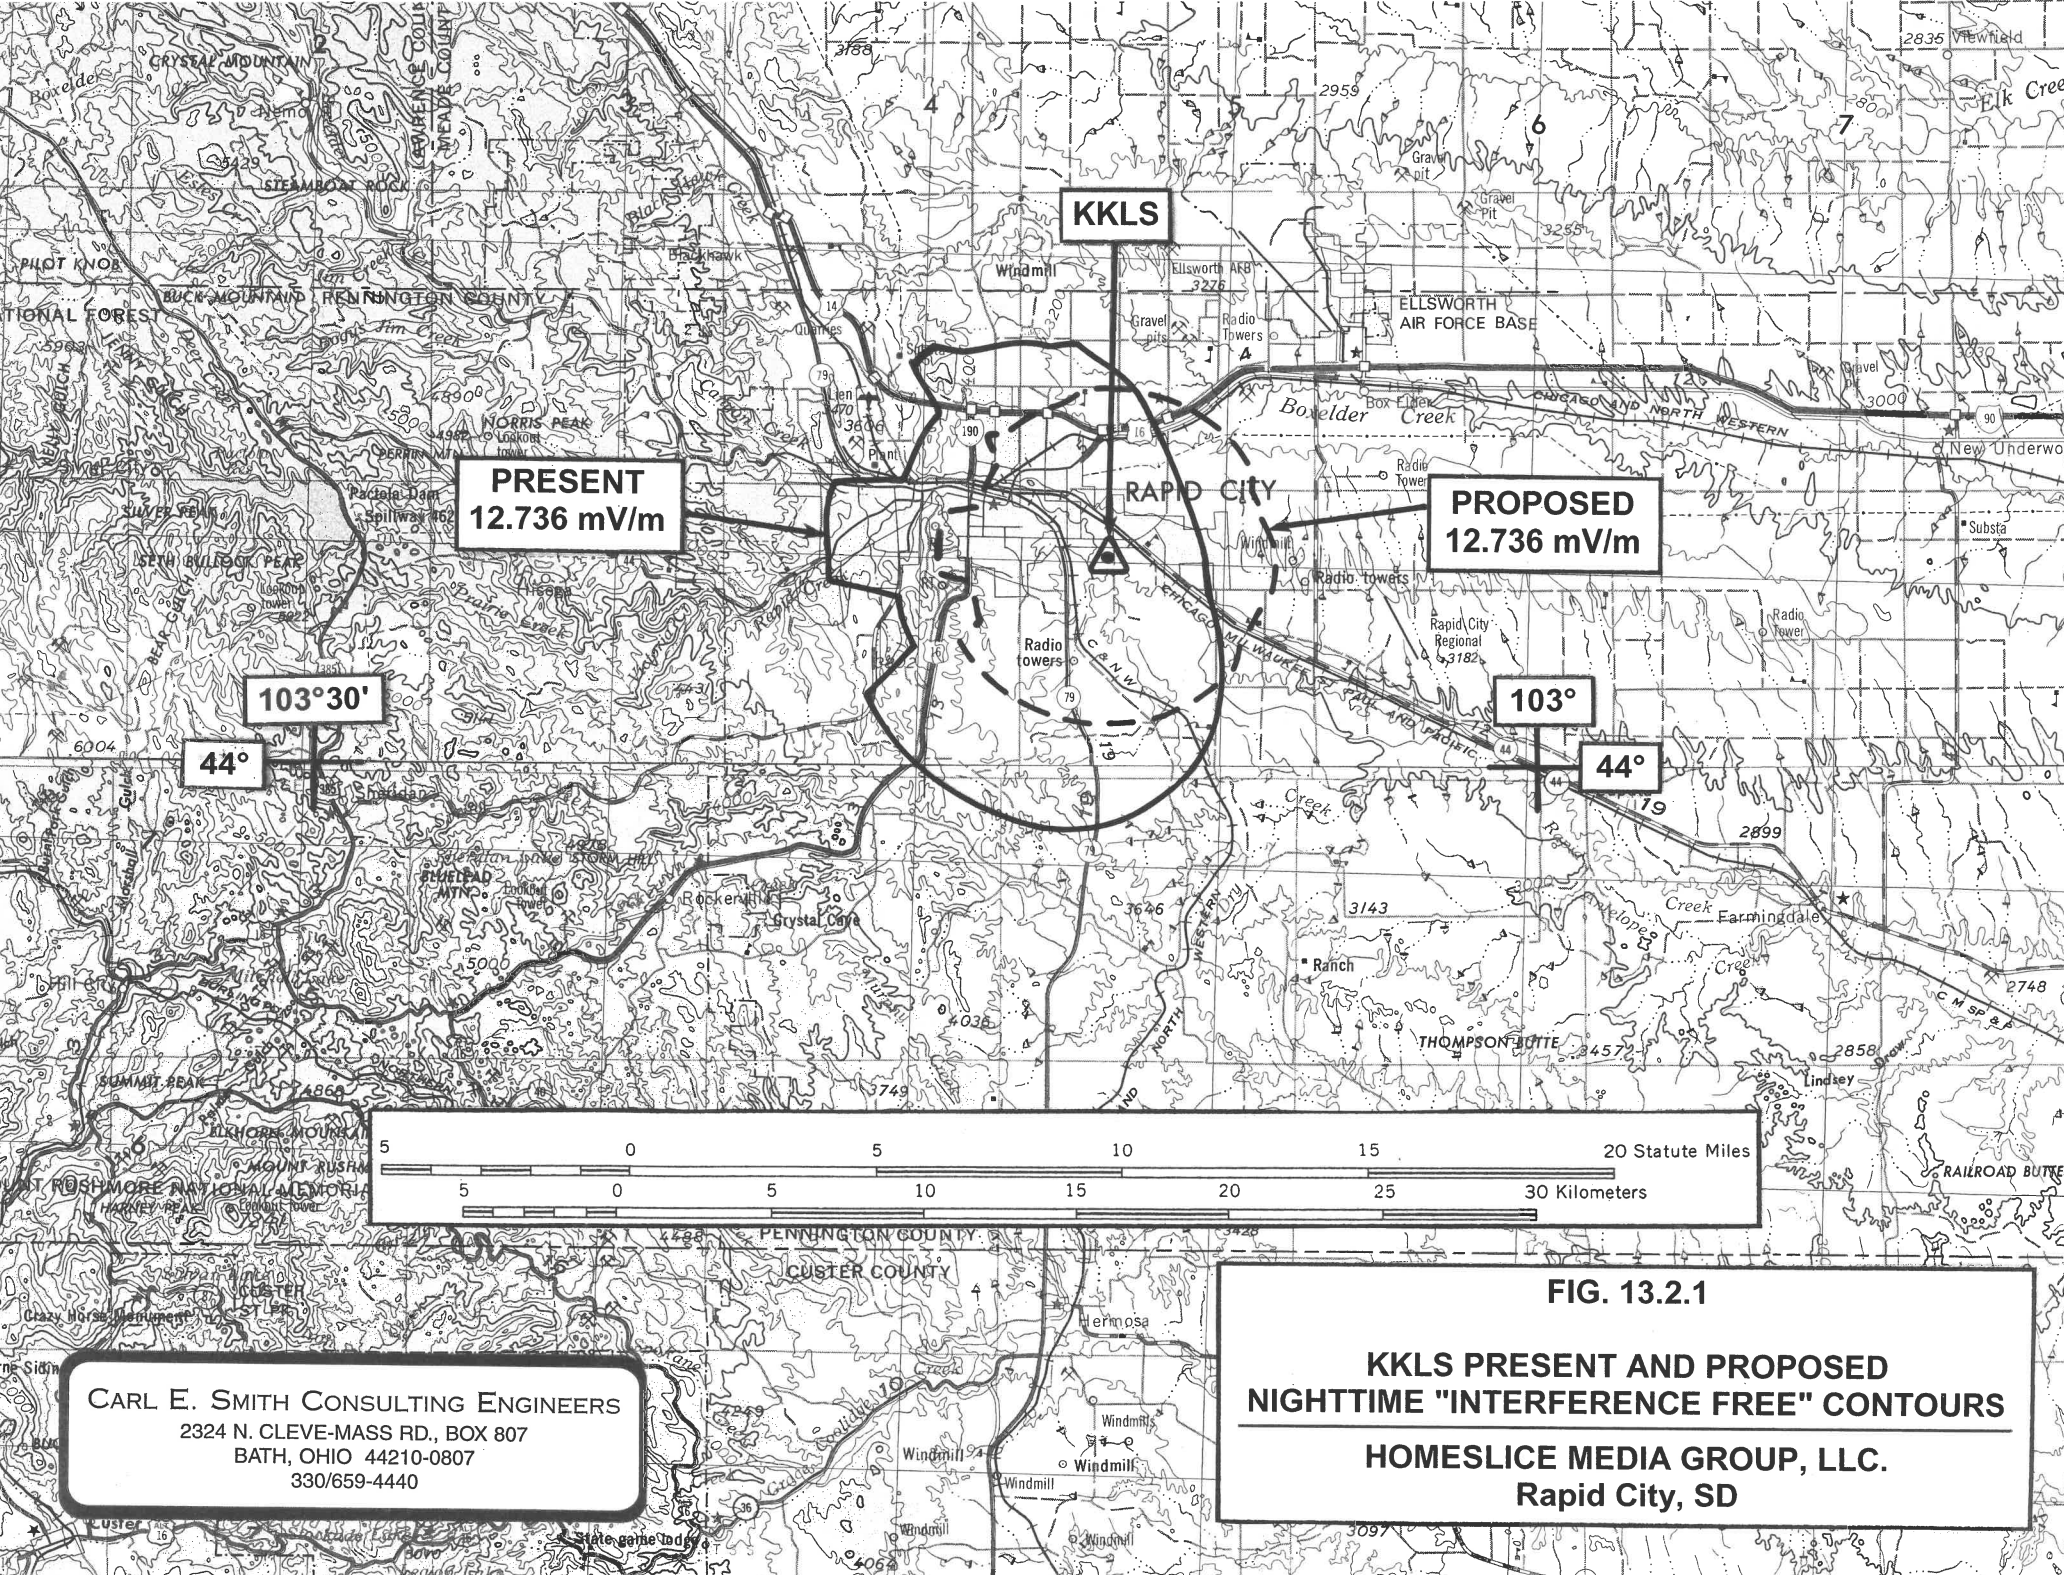

**PRESENT**  
12.736 mV/m


**PROPOSED**  
12.736 mV/m

103°30'

44°

103°

44°



CARL E. SMITH CONSULTING ENGINEERS  
2324 N. CLEVE-MASS RD., BOX 807  
BATH, OHIO 44210-0807  
330/659-4440

**FIG. 13.2.1**  
**KKLS PRESENT AND PROPOSED**  
**NIGHTTIME "INTERFERENCE FREE" CONTOURS**  
**HOMESLICE MEDIA GROUP, LLC.**  
**Rapid City, SD**