


PURPOSE OF STA


The purpose of this STA application is to allow the KASW-DT facility to temporarily operate with alternate parameters on its pre-transition channel (49) using an AUX transmitter while the new post-transition Phase 1 facility is built-out. The proposed KASW interim facility will completely encompass its community of license with the F(50,90) 48.0 dBu principal community contour and will not exceed its licensed F(50,90) 41.91 dBu protected noise limited contour in any azimuthal direction (see showing below).

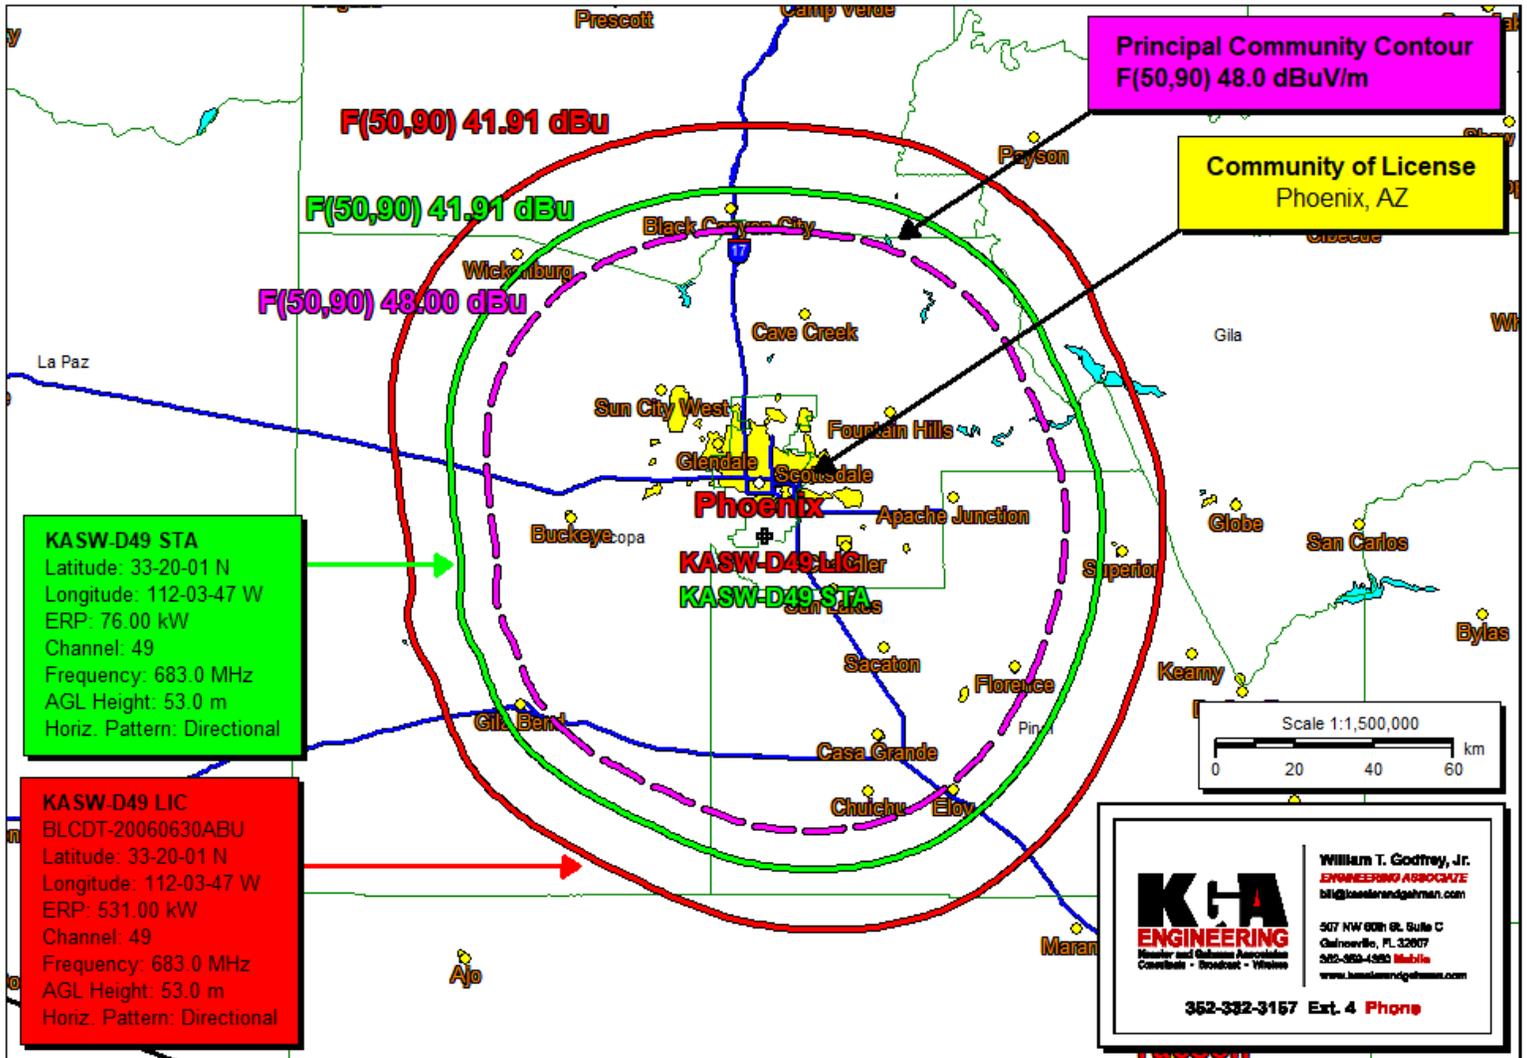

KASW-D49 LIC vs. KASW-D49 STA

CERTIFICATION

This technical statement was prepared by William T. Godfrey, Jr., Engineering Associate with the firm Kessler and Gehman Associates, Inc. having offices in Gainesville, Florida, and has been working with the firm in the field of radio and television broadcast consulting since 1998. Mr. Godfrey was a graduate from the University of North Florida and a Distinguished Military Graduate from the University of Florida. As a Professional in the field of Telecommunications he states under penalty of perjury that the information contained in this report is true and correct to the best of his knowledge and belief.

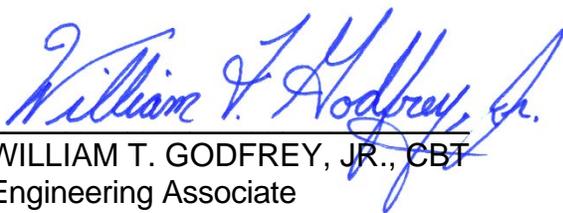

WILLIAM T. GODFREY, JR., CBT
Engineering Associate

6 September, 2018