

Method

☐ OET #65
☒ OET Mod

50 100 200 500 1000 2000 3000

Graph Distance
100

H kW ◀ ▶ 50

V kW ◀ ▶ 50

# of Bays	Spacing
-----------	---------

◀ ▶ 6 1

COR Meters Above Ground

Dist. in Meters to Tower Base

◀ ▶ 0

- Phelps-Dodge "Ring Stub" (EPA)
- ERI "Dual Cycloid"
- Jampro "Double V" (EPA)
- ERI/JAMPRO JBCP "Roto" (EPA)
- RCA "BFC" (EPA)
- RCA "BFG" (EPA)
- Shively 6800 series
- Shively 6810**
- Dielectric DCRM
- Dielectric DCRQ
- Dielectric DCRC

Max = 1000 μ W/sq cm

Pwr Density $\mu\text{W}/\text{sq cm}$ Controlled

0.81691


% of Max

0.0817

☒ Yes
☐ No

Title

Shively 6810-Type 6, 6 Bays, Spac= 1, H=50 kW, V=50 kW, 143 MAG

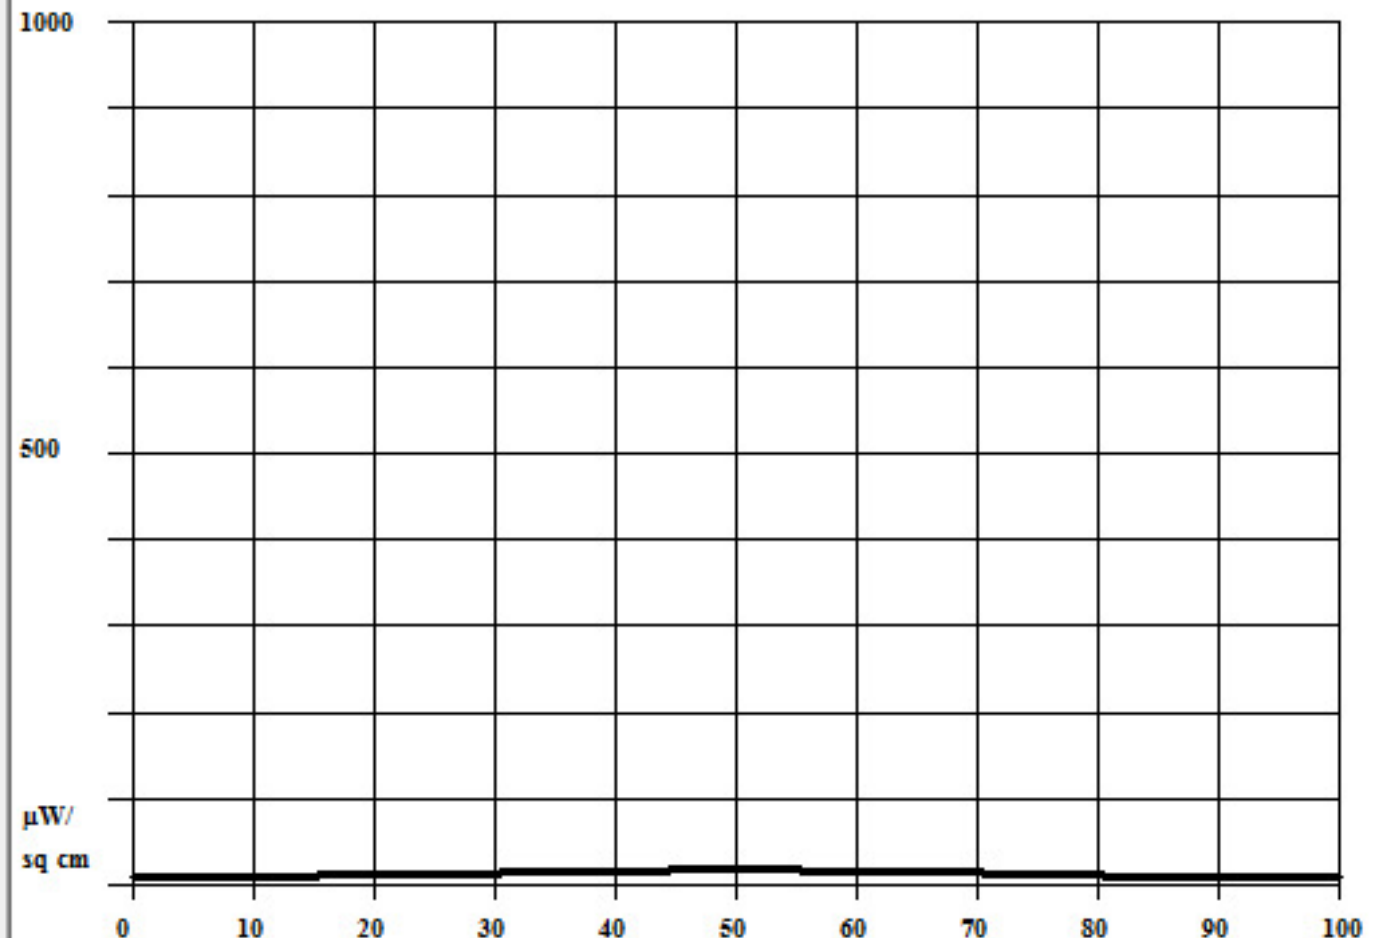

Distance in Meters

Print Tab

Print Screen

Disk Write

To Clipboard

Other RF