

COMPREHENSIVE TECHNICAL EXHIBIT

Figure 1 demonstrates that the 60 dBu F(50,50) contour of the proposed Auxiliary Facility is completely enclosed within the 60 dBu F(50,50) contour of the Primary Station.

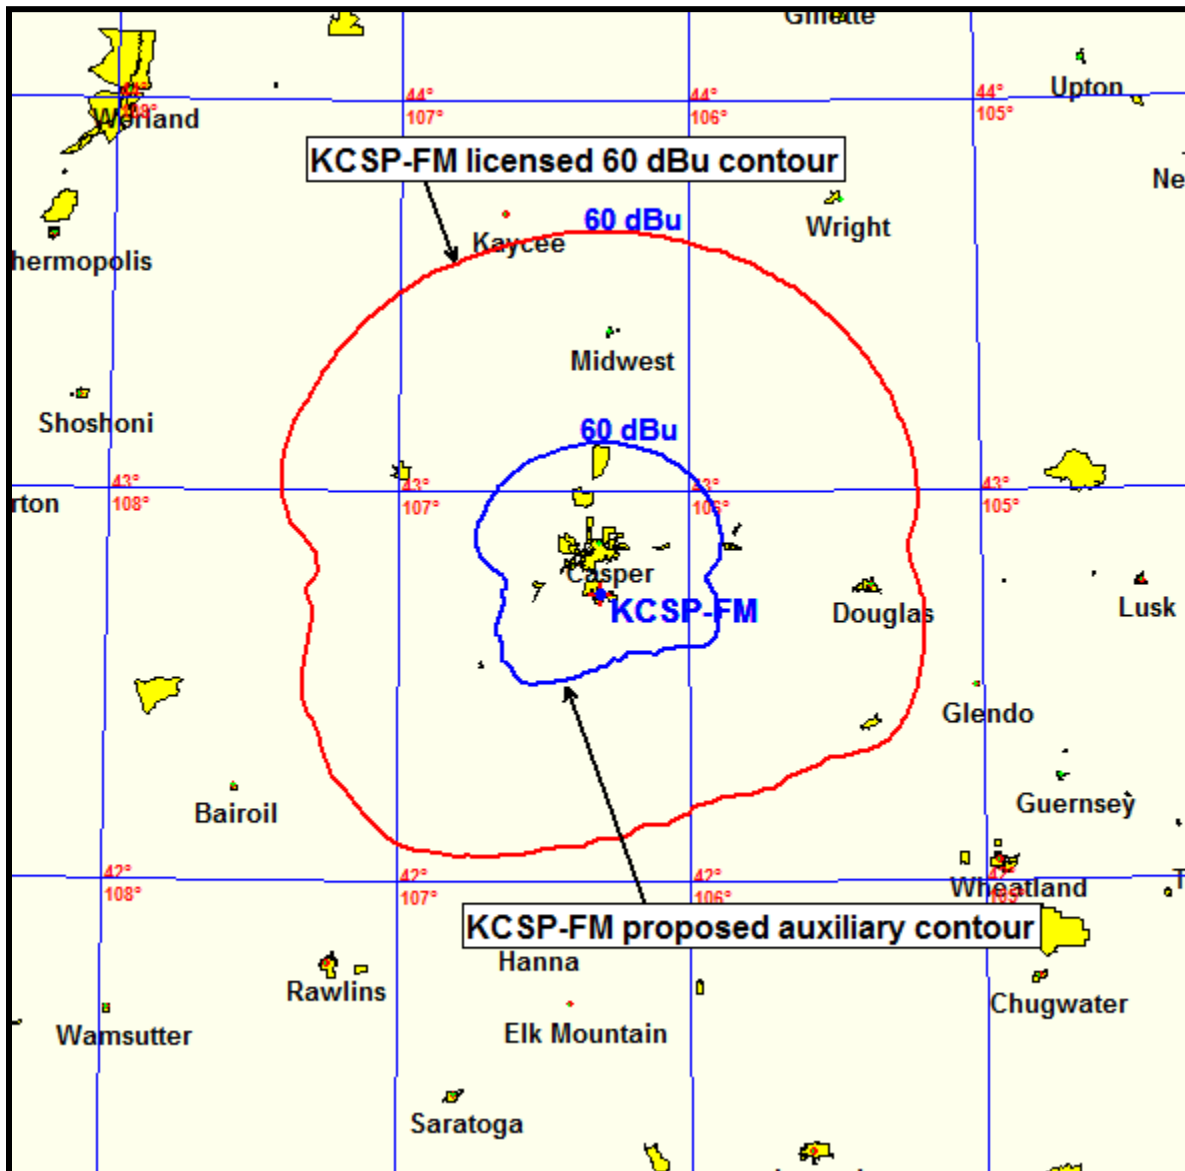


Figure 1

ENVIROMENTAL PROTECTION

There will be no new construction.

Applicant proposes use of a one bay Nicom BKG-77 Type 2 antenna, mounted on a registered tower (ASR # 1009562) with CORAGL at 32 meters, radiating 0.383 kW H&V ERP.

FMMModel calculates RFR to be a maximum of 7.83 uwatts/cm^2 , 30.6 meters from the base of the tower. This is well below the limits for both controlled and uncontrolled access.

The permittee/licensee in coordination with other users of the site will reduce power or cease operation as necessary to protect persons having access to the site, tower or antenna from radiofrequency electromagnetic fields in excess of FCC guidelines.