

Translator W297BU
Channel 297D – 107.3 MHz
0.250 kW ERP (DA) – 493.7 m COR AMSL
Pittsburgh, Pennsylvania
August 2023


Radiofrequency Radiation Calculation

This radiofrequency radiation study is being conducted to determine whether this proposal for Translator W297BU is in compliance with OET Bulletin Number 65, dated August 1997, regarding human exposure to radiofrequency radiation in the vicinity of broadcast towers. This study considers all nearby contributing stations and utilizes the appropriate formulas contained in the OET Bulletin.

The 2-bay SWR FMEC/2-TA antenna will be mounted with its center of radiation 138.7 meters above the ground and will operate with an effective radiated power of 0.250 kilowatts (circular polarization). This is an EPA Type 2 antenna (opposed “V” dipole) and qualifies as a “best case” antenna. At two meters, the height of an average person, above the ground at the base of the tower, this proposal will contribute, best case, 0.062599 microwatts/sq. centimeter, which is 0.0312995% of the allowable ANSI limit at the base of the tower. Other areas near the tower were examined and it was found that the maximum radiofrequency radiation contribution is 0.1 percent of the allowable ANSI limit between 31 and 131 meters from the tower. See the attached Radiofrequency Radiation Density graph. Because the radiofrequency radiation contribution of this proposal is less than 5%, it is not necessary to calculate the contributions of the nearby broadcast facilities at this multi-user site. Since the contribution of this proposal is below the maximum contribution of 100% defined in the aforementioned bulletin, it is believed to be in compliance with OET Bulletin Number 65 as is required by the Federal Communications Commission. All calculations were made in the uncontrolled mode.

The applicant will post warning signs in the vicinity of the tower warning of potential radiofrequency radiation hazards at the site. In addition, the applicant will reduce the power of the proposed facility or cease operation, as necessary, to protect persons having access to the site, tower or antenna from radiofrequency radiation in excess of FCC guidelines.

EPA Type 2: Opposed "V" dipole, 2 Bays, Spac= 1, H=0.250 kW, V=0.250 kW, 138.7 M AG

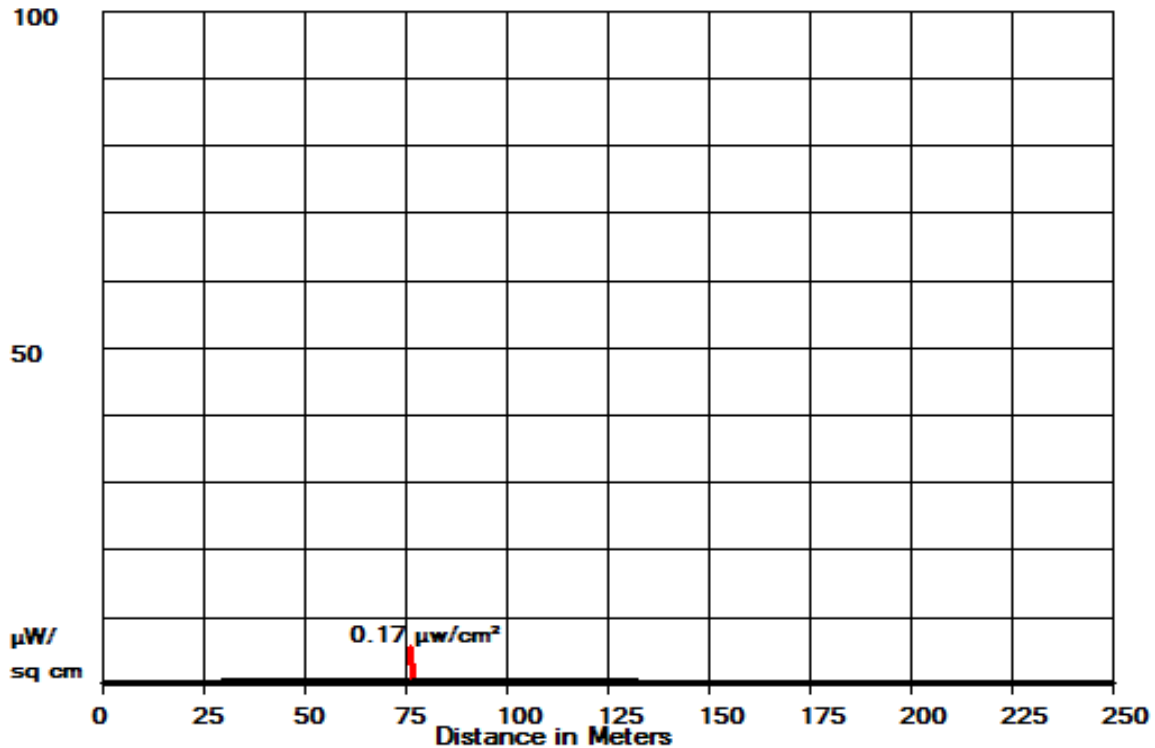

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)
 Dist(Meters) PD (H) PD (V) Total(uW/cm2) Percent Max.(200)

0	0.01	0.05	0.06	0.0
1	0.01	0.05	0.06	0.0
2	0.01	0.05	0.06	0.0
3	0.01	0.05	0.06	0.0
4	0.01	0.05	0.06	0.0
5	0.01	0.05	0.06	0.0
6	0.01	0.05	0.06	0.0
7	0.01	0.05	0.06	0.0
8	0.01	0.05	0.07	0.0
9	0.01	0.06	0.07	0.0
10	0.01	0.06	0.07	0.0
11	0.01	0.06	0.07	0.0
12	0.01	0.06	0.07	0.0
13	0.01	0.06	0.07	0.0
14	0.01	0.06	0.07	0.0
15	0.01	0.06	0.07	0.0
16	0.01	0.06	0.07	0.0
17	0.01	0.06	0.07	0.0
18	0.01	0.07	0.08	0.0
19	0.01	0.07	0.08	0.0
20	0.01	0.07	0.08	0.0
21	0.01	0.07	0.08	0.0
22	0.01	0.07	0.08	0.0
23	0.01	0.07	0.08	0.0
24	0.01	0.07	0.09	0.0
25	0.01	0.07	0.09	0.0

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
26	0.01	0.08	0.09	0.0
27	0.02	0.08	0.09	0.0
28	0.02	0.08	0.09	0.0
29	0.02	0.08	0.10	0.0
30	0.02	0.08	0.10	0.0
31	0.02	0.08	0.10	0.1
32	0.02	0.08	0.10	0.1
33	0.02	0.08	0.10	0.1
34	0.02	0.08	0.11	0.1
35	0.02	0.09	0.11	0.1
36	0.02	0.09	0.11	0.1
37	0.03	0.09	0.11	0.1
38	0.03	0.09	0.11	0.1
39	0.03	0.09	0.12	0.1
40	0.03	0.09	0.12	0.1
41	0.03	0.09	0.12	0.1
42	0.03	0.09	0.12	0.1
43	0.03	0.09	0.12	0.1
44	0.03	0.09	0.13	0.1
45	0.04	0.09	0.13	0.1
46	0.04	0.09	0.13	0.1
47	0.04	0.09	0.13	0.1
48	0.04	0.09	0.13	0.1
49	0.04	0.09	0.14	0.1
50	0.04	0.10	0.14	0.1
51	0.04	0.10	0.14	0.1
52	0.05	0.10	0.14	0.1
53	0.05	0.10	0.14	0.1
54	0.05	0.10	0.15	0.1
55	0.05	0.10	0.15	0.1
56	0.05	0.10	0.15	0.1
57	0.06	0.10	0.15	0.1
58	0.06	0.10	0.15	0.1
59	0.06	0.10	0.15	0.1
60	0.06	0.09	0.16	0.1
61	0.06	0.09	0.16	0.1
62	0.06	0.09	0.16	0.1
63	0.07	0.09	0.16	0.1
64	0.07	0.09	0.16	0.1
65	0.07	0.09	0.16	0.1
66	0.07	0.09	0.16	0.1
67	0.07	0.09	0.16	0.1
68	0.07	0.09	0.16	0.1
69	0.07	0.09	0.17	0.1
70	0.07	0.09	0.17	0.1
71	0.07	0.09	0.17	0.1
72	0.07	0.09	0.17	0.1
73	0.07	0.09	0.17	0.1
74	0.08	0.09	0.17	0.1
75	0.08	0.09	0.17	0.1
76	0.08	0.09	0.17	0.1
77	0.08	0.09	0.17	0.1

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
78	0.08	0.09	0.17	0.1
79	0.08	0.09	0.17	0.1
80	0.08	0.09	0.17	0.1
81	0.08	0.09	0.17	0.1
82	0.08	0.09	0.17	0.1
83	0.08	0.09	0.17	0.1
84	0.08	0.09	0.17	0.1
85	0.08	0.08	0.17	0.1
86	0.08	0.08	0.17	0.1
87	0.08	0.08	0.17	0.1
88	0.08	0.08	0.17	0.1
89	0.08	0.08	0.17	0.1
90	0.08	0.08	0.16	0.1
91	0.08	0.08	0.16	0.1
92	0.08	0.08	0.16	0.1
93	0.09	0.08	0.16	0.1
94	0.09	0.08	0.16	0.1
95	0.09	0.08	0.16	0.1
96	0.09	0.07	0.16	0.1
97	0.08	0.07	0.16	0.1
98	0.08	0.07	0.16	0.1
99	0.08	0.07	0.15	0.1
100	0.08	0.07	0.15	0.1
101	0.08	0.07	0.15	0.1
102	0.08	0.07	0.15	0.1
103	0.08	0.07	0.15	0.1
104	0.08	0.07	0.15	0.1
105	0.08	0.07	0.15	0.1
106	0.08	0.06	0.14	0.1
107	0.08	0.06	0.14	0.1
108	0.08	0.06	0.14	0.1
109	0.08	0.06	0.14	0.1
110	0.08	0.06	0.14	0.1
111	0.08	0.06	0.13	0.1
112	0.07	0.06	0.13	0.1
113	0.07	0.06	0.13	0.1
114	0.07	0.06	0.13	0.1
115	0.07	0.05	0.13	0.1
116	0.07	0.05	0.13	0.1
117	0.07	0.05	0.12	0.1
118	0.07	0.05	0.12	0.1
119	0.07	0.05	0.12	0.1
120	0.07	0.05	0.12	0.1
121	0.07	0.05	0.12	0.1
122	0.07	0.05	0.12	0.1
123	0.07	0.05	0.11	0.1
124	0.07	0.05	0.11	0.1
125	0.07	0.04	0.11	0.1
126	0.06	0.04	0.11	0.1
127	0.06	0.04	0.11	0.1
128	0.06	0.04	0.11	0.1
129	0.06	0.04	0.10	0.1

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
130	0.06	0.04	0.10	0.1
131	0.06	0.04	0.10	0.1
132	0.06	0.04	0.10	0.0
133	0.06	0.04	0.10	0.0
134	0.06	0.04	0.09	0.0
135	0.06	0.04	0.09	0.0
136	0.06	0.04	0.09	0.0
137	0.06	0.03	0.09	0.0
138	0.05	0.03	0.09	0.0
139	0.05	0.03	0.09	0.0
140	0.05	0.03	0.08	0.0
141	0.05	0.03	0.08	0.0
142	0.05	0.03	0.08	0.0
143	0.05	0.03	0.08	0.0
144	0.05	0.03	0.08	0.0
145	0.05	0.03	0.07	0.0
146	0.05	0.03	0.07	0.0
147	0.05	0.03	0.07	0.0
148	0.04	0.02	0.07	0.0
149	0.04	0.02	0.07	0.0
150	0.04	0.02	0.07	0.0
151	0.04	0.02	0.06	0.0
152	0.04	0.02	0.06	0.0
153	0.04	0.02	0.06	0.0
154	0.04	0.02	0.06	0.0
155	0.04	0.02	0.06	0.0
156	0.04	0.02	0.06	0.0
157	0.04	0.02	0.05	0.0
158	0.03	0.02	0.05	0.0
159	0.03	0.02	0.05	0.0
160	0.03	0.02	0.05	0.0
161	0.03	0.02	0.05	0.0
162	0.03	0.02	0.05	0.0
163	0.03	0.02	0.05	0.0
164	0.03	0.01	0.04	0.0
165	0.03	0.01	0.04	0.0
166	0.03	0.01	0.04	0.0
167	0.03	0.01	0.04	0.0
168	0.03	0.01	0.04	0.0
169	0.02	0.01	0.04	0.0
170	0.02	0.01	0.04	0.0
171	0.02	0.01	0.03	0.0
172	0.02	0.01	0.03	0.0
173	0.02	0.01	0.03	0.0
174	0.02	0.01	0.03	0.0
175	0.02	0.01	0.03	0.0
176	0.02	0.01	0.03	0.0
177	0.02	0.01	0.03	0.0
178	0.02	0.01	0.03	0.0
179	0.02	0.01	0.03	0.0
180	0.02	0.01	0.02	0.0
181	0.02	0.01	0.02	0.0

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
182	0.01	0.01	0.02	0.0
183	0.01	0.01	0.02	0.0
184	0.01	0.01	0.02	0.0
185	0.01	0.01	0.02	0.0
186	0.01	0.01	0.02	0.0
187	0.01	0.01	0.02	0.0
188	0.01	0.01	0.02	0.0
189	0.01	0.01	0.02	0.0
190	0.01	0.01	0.02	0.0
191	0.01	0.00	0.01	0.0
192	0.01	0.00	0.01	0.0
193	0.01	0.00	0.01	0.0
194	0.01	0.00	0.01	0.0
195	0.01	0.00	0.01	0.0
196	0.01	0.00	0.01	0.0
197	0.01	0.00	0.01	0.0
198	0.01	0.00	0.01	0.0
199	0.01	0.00	0.01	0.0
200	0.01	0.00	0.01	0.0
201	0.01	0.00	0.01	0.0
202	0.01	0.00	0.01	0.0
203	0.00	0.00	0.01	0.0
204	0.00	0.00	0.01	0.0
205	0.00	0.00	0.01	0.0
206	0.00	0.00	0.01	0.0
207	0.00	0.00	0.01	0.0
208	0.00	0.00	0.00	0.0
209	0.00	0.00	0.00	0.0
210	0.00	0.00	0.00	0.0
211	0.00	0.00	0.00	0.0
212	0.00	0.00	0.00	0.0
213	0.00	0.00	0.00	0.0
214	0.00	0.00	0.00	0.0
215	0.00	0.00	0.00	0.0
216	0.00	0.00	0.00	0.0
217	0.00	0.00	0.00	0.0
218	0.00	0.00	0.00	0.0
219	0.00	0.00	0.00	0.0
220	0.00	0.00	0.00	0.0
221	0.00	0.00	0.00	0.0
222	0.00	0.00	0.00	0.0
223	0.00	0.00	0.00	0.0
224	0.00	0.00	0.00	0.0
225	0.00	0.00	0.00	0.0
226	0.00	0.00	0.00	0.0
227	0.00	0.00	0.00	0.0
228	0.00	0.00	0.00	0.0
229	0.00	0.00	0.00	0.0
230	0.00	0.00	0.00	0.0
231	0.00	0.00	0.00	0.0
232	0.00	0.00	0.00	0.0
233	0.00	0.00	0.00	0.0

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
234	0.00	0.00	0.00	0.0
235	0.00	0.00	0.00	0.0
236	0.00	0.00	0.00	0.0
237	0.00	0.00	0.00	0.0
238	0.00	0.00	0.00	0.0
239	0.00	0.00	0.00	0.0
240	0.00	0.00	0.00	0.0
241	0.00	0.00	0.00	0.0
242	0.00	0.00	0.00	0.0
243	0.00	0.00	0.00	0.0
244	0.00	0.00	0.00	0.0
245	0.00	0.00	0.00	0.0
246	0.00	0.00	0.00	0.0
247	0.00	0.00	0.00	0.0
248	0.00	0.00	0.00	0.0
249	0.00	0.00	0.00	0.0
250	0.00	0.00	0.00	0.0