


FM Model

Radio Frequency Safety

- FCC Policy on Human Exposure
- RF Safety Highlighted Releases
- RF Safety FAQ
- FM Model
- Body Tissue Dielectric Parameters

The FM Model calculator determines the potential exposure from radiofrequency (RF) electromagnetic fields produced by FM broadcast station antennas at ground level. The FM Model software was originally developed by the FCC in 1997 as a standalone executable program and this improved version provides more precise predictions and runs via a JavaScript enabled web browser. The FM Model is originally based on measured data published in 1985 by the EPA. [Show More....](#)

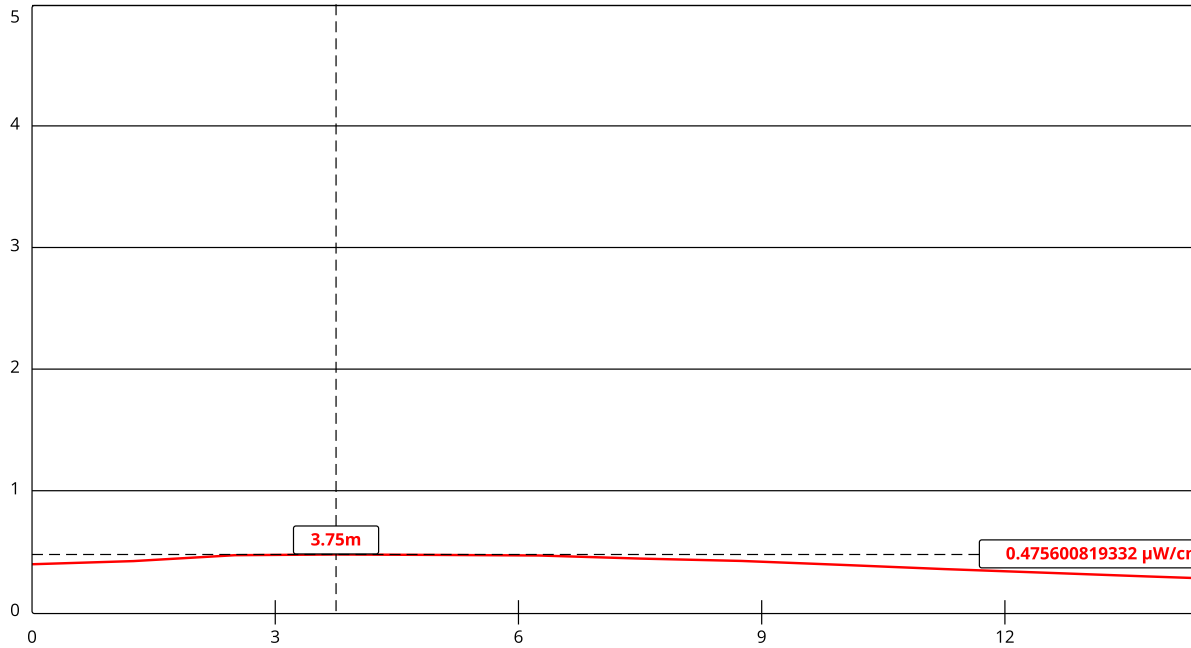

Channel Selection	Channel 262 (100.3 MHz) ▼		
Antenna Type +	EPA Type 1: Ring-and-Stub or "Other" ▼		
Height (m)	15	Distance (m)	15
ERP-H (W)	2	ERP-V (W)	2
Num of Elements	1	λ	1
Num of Points	12	Apply	

* To Print - On your browser, please select Shrink to Fit under the Scale tab from Print Preview

Hide Tabular Results -

Distance (m)	Power Density (μW/cm²)
0	0.4
1.25	0.4
2.5	0.5
3.75	0.5
5	0.5
6.25	0.5
7.5	0.4
8.75	0.4
10	0.4

Distance (m)	Power Density ($\mu\text{W}/\text{cm}^2$)
11.25	0.4
12.5	0.3
13.75	0.3
15	0.3

[Go to the Top of the Page](#)

Bureau/Office:

[Engineering & Technology](#)

Updated:

Friday, June 8, 2018



Federal Communications Commission

45 L Street NE

Washington, DC 20554

Phone: 1-888-225-5322

ASL Video Call: 1-844-432-2275

Fax: 1-866-418-0232

[Contact Us](#)

[Visiting FCC Facilities](#)

