

**February 2014
FM Translator K232BK
Winnemucca, Nevada Channel 232D
Allocation Study**

The attached spacing study shows the spacing between the proposed translator site and the location of cochannel and adjacent channel stations and proposals. This study was made with the Commission's Class A spacing requirements, and individual situations were examined to determine the lack of prohibited contour overlap per the requirements of §74.1204 of the Rules. The attached allocation study map demonstrates compliance with the Commission's Rules for protection of FM broadcast stations and FM translators as outlined in §74.1204.


The attached spacing study demonstrates compliance with §73.207 of the Commission's Rules regarding spacing restrictions to stations which are 53 or 54 channels removed from the proposed operation.

```

=====
SEARCH PARAMETERS                               FM Database Date: 140221
Channel: 232A      94.3 MHz                      Page 1
Latitude: 41 0 30
Longitude: 117 46 9
Safety Zone: 50 km
Job Title: K232BK WINNEMUCCA
    
```

| Call Status | City St | FCC File No. | Channel Freq. | ERP(kW) HAAT(m) | Latitude Longitude | Bearing deg-True | Dist (km) | Req (km) |
|-------------|---------------|---------------|---------------|-----------------|--------------------|------------------|-------------|-----------|
| K232BK APP | WINNEMUCCA NV | BPFT-31224AAH | 232D 94.3 | 0.250 749.0 | 41-00-37 117-45-48 | 66.2 | 0.54 0.00 | 0 TRANS |
| K232BK LIC | WINNEMUCCA NV | BLFT-880825TB | 232D 94.3 | 0.030 767.0 | 41-00-38 117-45-40 | 69.9 | 0.72 0.00 | 0 TRANS |
| KZBI LIC | ELKO NV | BLH-51207AAV | 233C0 94.5 | 36.000 463.0 | 40-55-18 115-50-58 | 92.8 | 161.89 9.89 | 152 CLOSE |

==== END OF FM SPACING STUDY FOR CHANNEL 232 =====

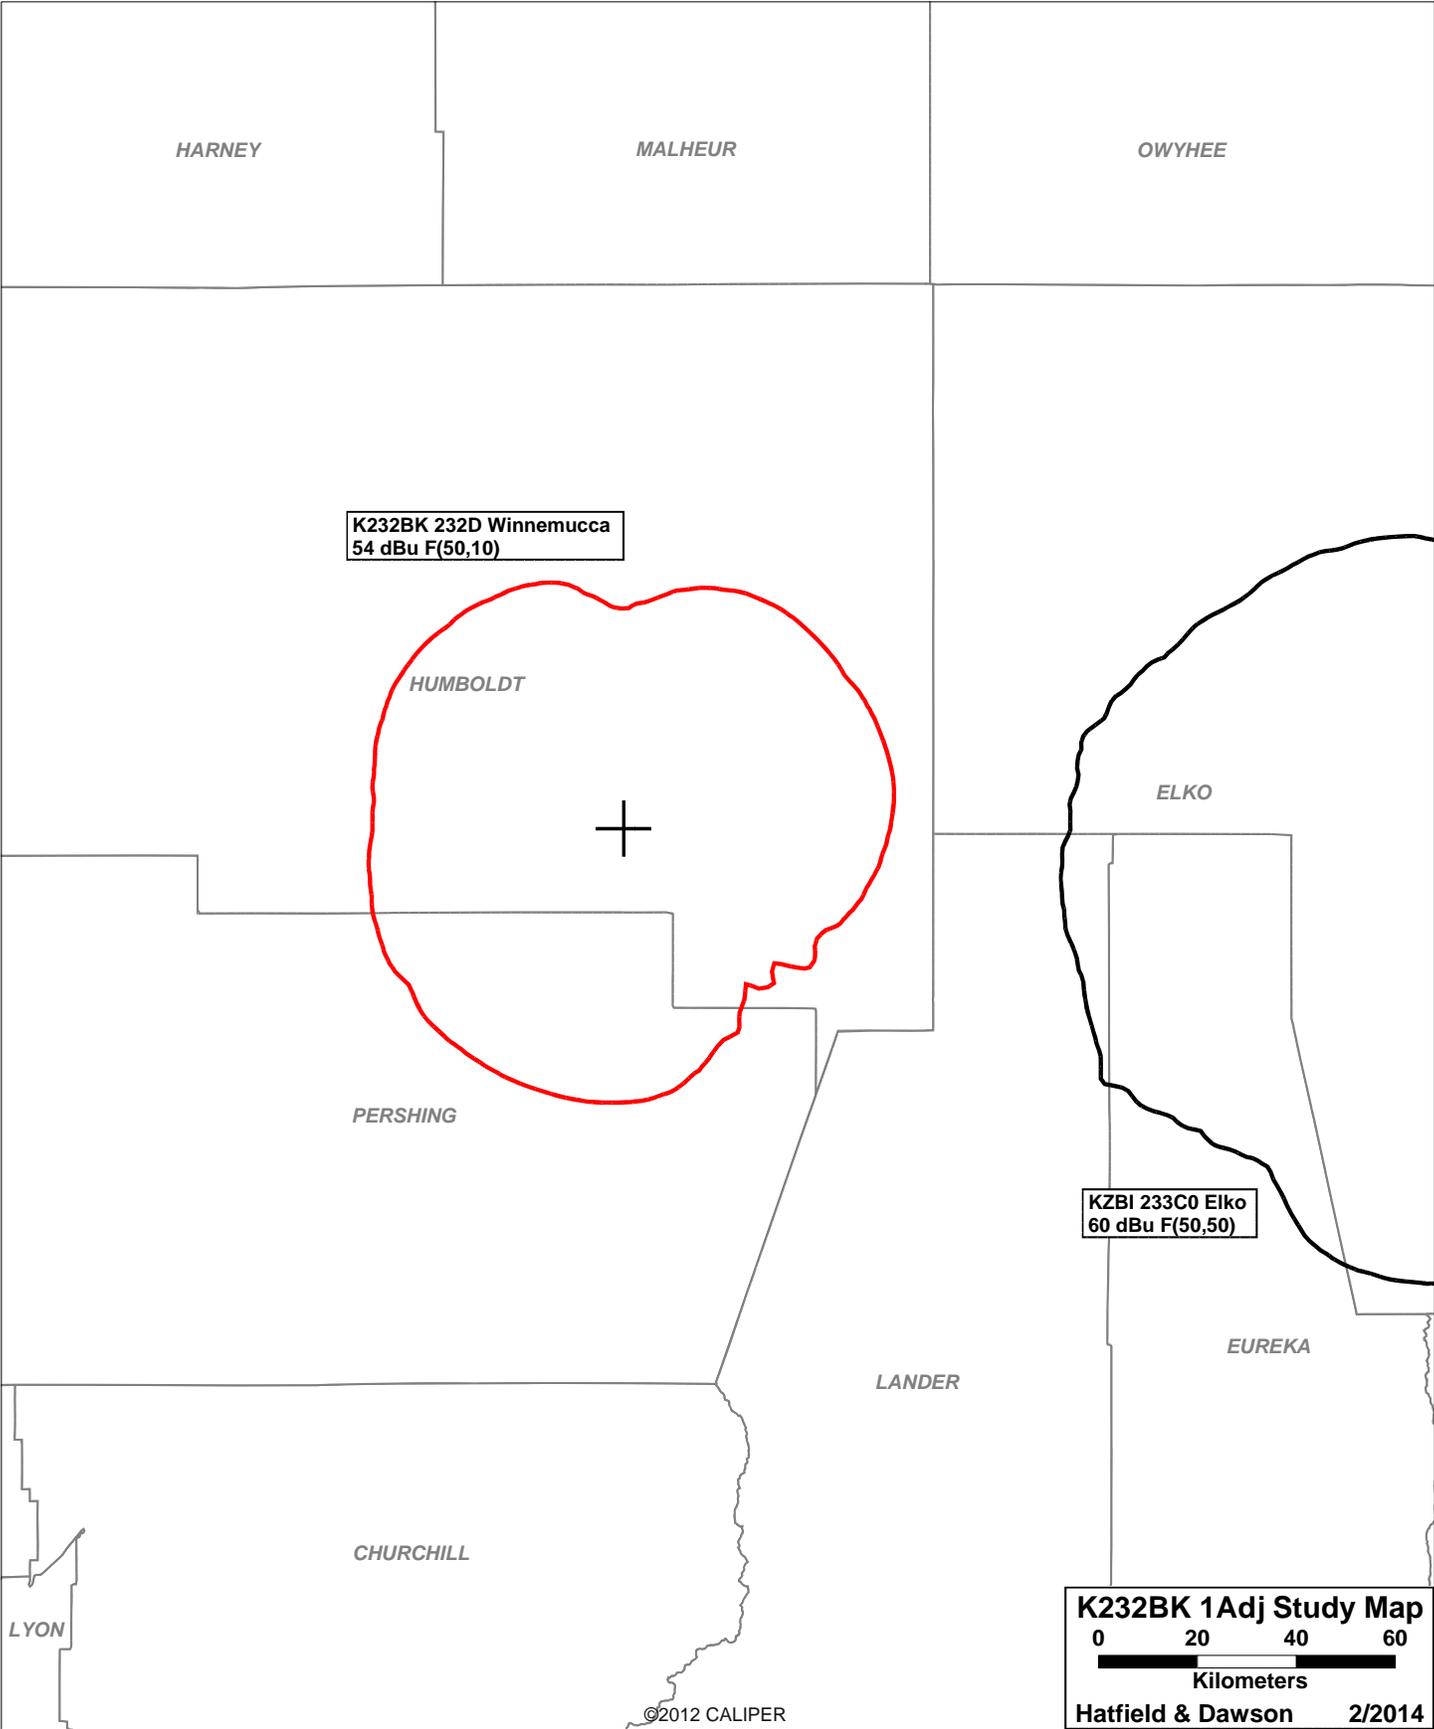

HARNEY

MALHEUR

OWYHEE

K232BK 232D Winnemucca
54 dBu F(50,10)

HUMBOLDT



ELKO

PERSHING

KZBI 233C0 Elko
60 dBu F(50,50)

EUREKA

LANDER

CHURCHILL

LYON

K232BK 1Adj Study Map

0 20 40 60



Kilometers

Hatfield & Dawson 2/2014

©2012 CALIPER

December 2013
FM Translator K232BK
Winnemucca, Nevada Channel 232D
RF Exposure Study

Facilities Proposed

The proposed operation will be on Channel 232D (94.3 MHz) with an effective radiated power of 0.250 kilowatts. Operation is proposed with an antenna which will be installed on an existing tower at Winnemucca Mountain. Duplicated operation is proposed with FM station KHYX.

The antenna support structure does not exceed 60.96 meters (200 feet) above ground and does not require notification to the Federal Aviation Administration. Therefore, this structure does not require an Antenna Structure Registration Number.

RF Exposure Calculations

The power density calculations shown below were made using the techniques outlined in OET Bulletin No. 65. "Ground level" calculations in this report have been made at a reference height of 2 meters above ground to provide a worst-case estimate of exposure for persons standing on the ground in the vicinity of the tower. The equation shown below was used to calculate the ground level power density figures from each antenna.

$$S(\mu W / cm^2) = \frac{33.40981 \times AdjERP(Watts)}{D^2}$$

Where: *AdjERP(Watts)* is the maximum lobe effective radiated power times the element pattern factor times the array pattern factor.

D is the distance in meters from the center of radiation to the calculation point.

Ground level power densities have been calculated for locations extending from the base of the tower to a distance of 1000 meters. Values past this point are increasingly negligible.

Calculations of the power density produced by the proposed K232BK antenna system assume a Type 1 element pattern, which is the "worst case" element pattern. Under this worst-case assumption, the highest calculated ground level power density from K232BK alone occurs at a distance of 4 meters from the base of the antenna support structure. At this point the power

density is calculated to be 39.2 $\mu\text{W}/\text{cm}^2$, which is 19.6% of the 200 $\mu\text{W}/\text{cm}^2$ FCC General Population standard at FM frequencies.


Calculations of the power density produced by the proposed KHYX antenna system assume a Type 1 element pattern, which is the “worst case” element pattern. Under this worst-case assumption, the highest calculated ground level power density from KHYX alone occurs at a distance of 4 meters from the base of the antenna support structure. At this point the power density is calculated to be 78.4 $\mu\text{W}/\text{cm}^2$, which is 39.2% of the 200 $\mu\text{W}/\text{cm}^2$ FCC General Population standard at FM frequencies.

TV translator K17HB-D operates from an adjacent tower at this site. Calculations of the power density produced by the proposed K17HB-D antenna system have been made using the manufacturer’s vertical plane pattern for the Scala 4DR-4-S antenna used by that station. The highest calculated ground level power density from K17HB-D alone occurs at a distance of 2 meters from the base of the antenna support structure. At this point the power density is calculated to be 36.1 $\mu\text{W}/\text{cm}^2$, which is 11.1% of the 325 $\mu\text{W}/\text{cm}^2$ FCC General Population standard at the Channel 17 frequency.

These calculations show that the maximum calculated power density produced at two meters above ground level by the proposed operations of KHYX and K232BK and the present operation of K17HB-D (were their maxima to coincide, which they do not) is 69.9% of the FCC General Population standard.¹

The permittee/licensee in coordination with other users of the site must reduce power or cease operation as necessary to protect persons having access to the site, tower or antenna from radiofrequency exposure in excess of FCC guidelines.

¹ Three nearby FM translators all operate with only 10 watts ERP, and thus are categorically excluded from this study.

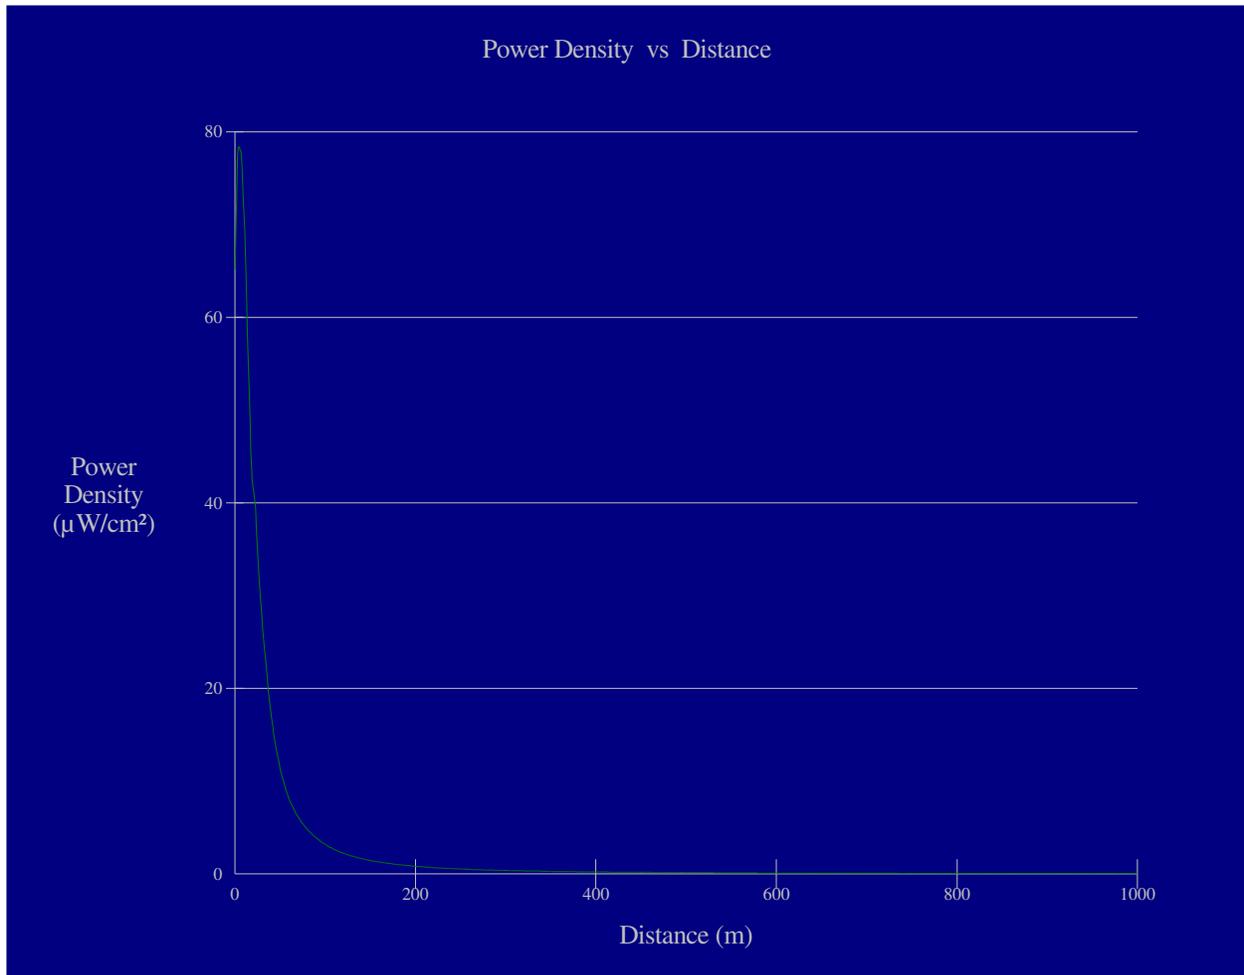

Ground-Level RF Exposure

OET FMModel

KQGD 274C2 Winnemucca

Antenna Type: "ring stub" assumed for this study

No. of Elements: 1

Element Spacing: dna wavelength


Distance: 1000 meters

Horizontal ERP: 500 watts

Vertical ERP: 500 watts

Antenna Height: 18 meters AGL

Maximum Calculated Power Density is 78.4 $\mu\text{W}/\text{cm}^2$ at 4 meters from the antenna structure.

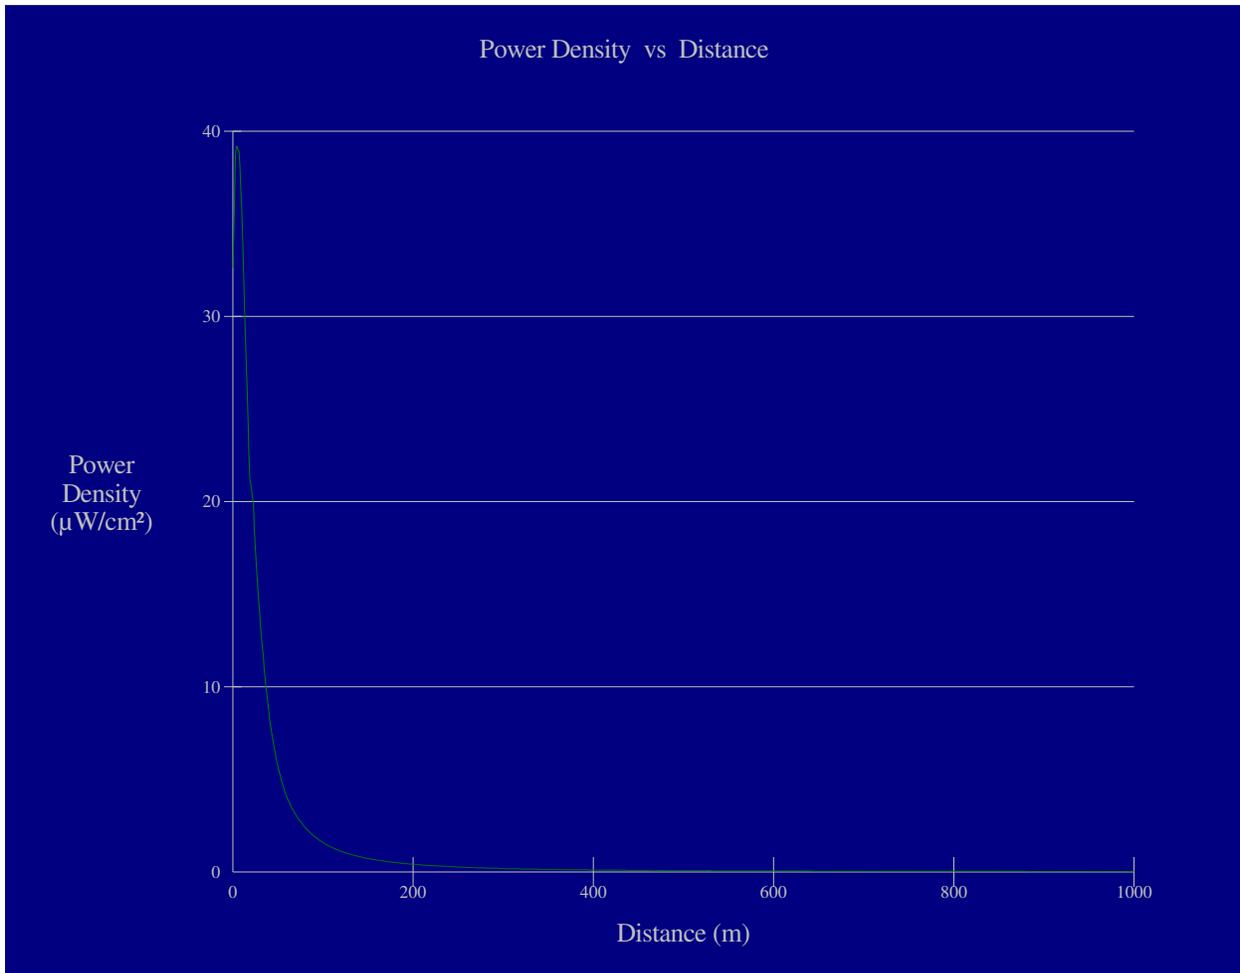

Ground-Level RF Exposure

OET FMModel

K232BK Winnemucca

Antenna Type: "ring stub" assumed for this study

No. of Elements: 1

Element Spacing: dna wavelength

Distance: 1000 meters

Horizontal ERP: 250 watts

Vertical ERP: 250 watts

Antenna Height: 18 meters AGL

Maximum Calculated Power Density is $39.2 \mu\text{W}/\text{cm}^2$ at 4 meters from the antenna structure.