

EXHIBIT #14
COMMUNITY COVERAGE

Central Educational Broadcasting, Inc.

Minor Change to Licensed Station

WSCF-FM

BMLED-19971002KB

Vero Beach, FL

September 2007

CH 220C2


40 kW H & V DA

WSCF-FM operates on Channel 220, a reserved channel. According to Section 73.515, a minimum field strength of 1 mv/m (60 dBu) must be provided over at least 50% of its community of license or reach 50% of the population within the community. The map on page #2 shows the 60 dBu contour of the proposed WSCF-FM change. Vero Beach, FL, the city of license, is shown to be within this contour.

Page #3 is a distance to 60 dBu contour table of the proposed WSCF-FM facility.

Coverage Study
09-07-2007

WSCF(New) CH220 C2 40.0 kW 129.9M COR
Prot. = 60 dBu. Population = 273,485

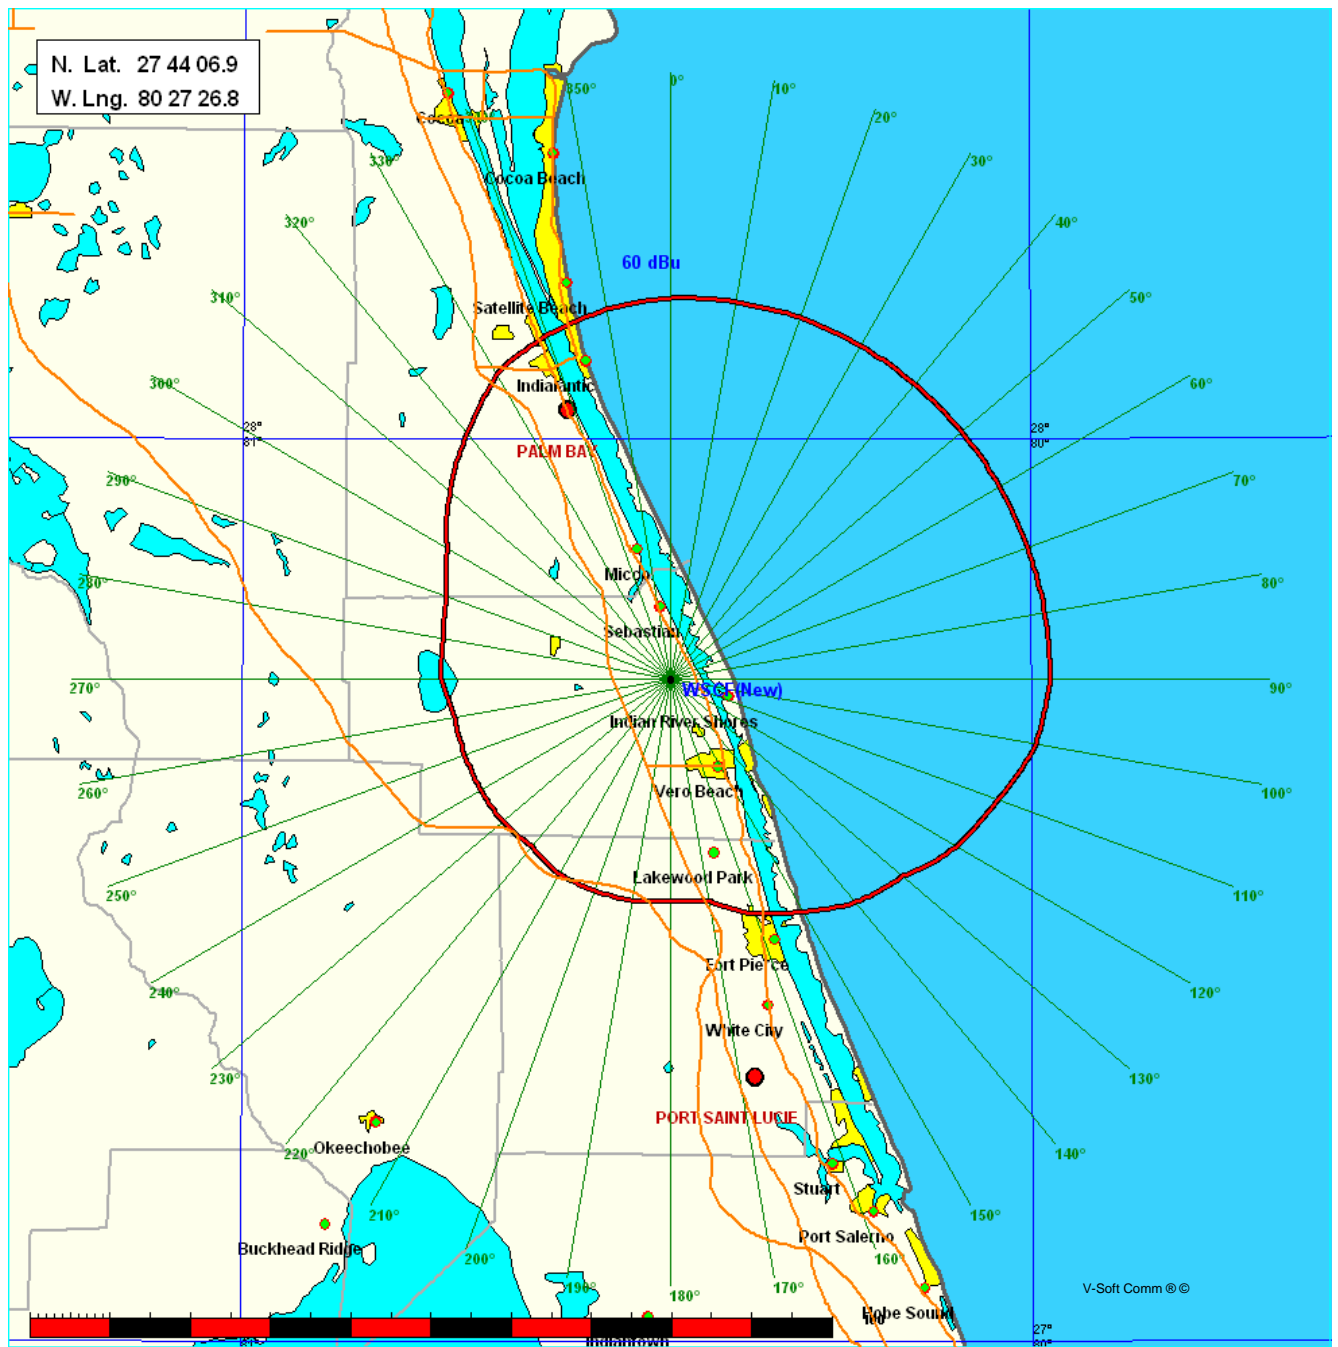

N. Lat. = 274406.9 W. Lng. = 802726.8

HAAT and Distance to Contour - FCC Method - NGDC 30 SEC
WSCF (New) Distance to 60 dBu Contour

Azi.	AV EL	HAAT	ERP kW	dBk	Field	60-F5
000	1.2	128.7	38.4160	15.85	0.980	46.85
010	0.5	129.4	39.2040	15.93	0.990	47.13
020	0.2	129.7	40.0000	16.02	1.000	47.35
030	0.0	129.9	40.0000	16.02	1.000	47.38
040	0.0	129.9	40.0000	16.02	1.000	47.38
050	0.0	129.9	40.0000	16.02	1.000	47.38
060	0.0	129.9	40.0000	16.02	1.000	47.38
070	0.0	129.9	40.0000	16.02	1.000	47.38
080	0.0	129.9	40.0000	16.02	1.000	47.38
090	0.0	129.9	40.0000	16.02	1.000	47.38
100	0.1	129.8	35.3440	15.48	0.940	46.26
110	0.4	129.5	25.6000	14.08	0.800	43.46
120	0.7	129.2	19.6000	12.92	0.700	41.20
130	1.4	128.5	12.9960	11.14	0.570	37.78
140	2.4	127.5	10.4040	10.17	0.510	35.88
150	3.0	126.9	7.3960	8.69	0.430	33.10
160	6.0	123.9	5.7760	7.62	0.380	30.86
170	6.0	123.9	3.6000	5.56	0.300	27.71
180	6.0	123.9	3.3640	5.27	0.290	27.30
190	6.0	123.9	3.6000	5.56	0.300	27.71
200	6.0	123.9	3.6000	5.56	0.300	27.71
210	6.0	123.9	3.6000	5.56	0.300	27.71
220	6.0	123.9	3.1360	4.96	0.280	26.88
230	6.0	123.9	3.3640	5.27	0.290	27.30
240	6.0	123.9	3.3640	5.27	0.290	27.30
250	6.0	123.9	3.3640	5.27	0.290	27.30
260	6.0	123.9	3.3640	5.27	0.290	27.30
270	6.0	123.9	4.0960	6.12	0.320	28.53
280	6.2	123.7	4.2250	6.26	0.325	28.71
290	6.0	123.9	4.8720	6.88	0.349	29.67
300	5.1	124.8	6.7240	8.28	0.410	32.10
310	4.6	125.3	10.6562	10.28	0.516	35.81
320	5.1	124.8	16.8889	12.28	0.650	39.43
330	1.8	128.1	25.6000	14.08	0.800	43.27
340	2.4	127.5	31.6840	15.01	0.890	45.01
350	2.9	127.0	36.8640	15.67	0.960	46.26

Ave El= 3.23 M HAAT= 126.67 M AMSL= 129.9