

MINOR CHANGE APPLICATION
RADIO POWER, INC.
W261AX FM TRANSLATOR
CH 261D - 100.1 MHZ - 0.050 KW
OAKDALE, PENNSYLVANIA
July 2010

EXHIBIT B

The proposed operation of W261AX, with an effective radiated power of 0.050 kilowatt at 9.45 meters above ground level, will not cause interference to any existing, applied for, or proposed facility, as noted on Exhibit B1. However, the proposed W261AX site is inside the protected 54 dBu contours of three adjacent channel stations: WSHH, Channel 259B, Pittsburgh, Pennsylvania; WZPT, Channel 264B, New Kensington, Pennsylvania; and WYJK-FM, Channel 263B, Bellaire, Ohio. Due to the channel relationship between W261AX and WSHH, WZPT and WYJK-FM, a 40 dB ratio of the protected and interfering contours applies. As the signal level of WSHH, WZPT and WYJK-FM is above 54 dB at the proposed tower site for W261AX, we have applied the 40 dB ratio to the contour of WSHH, WZPT and WYJK-FM, based on the relevant protected contour at the site. A map showing the relative contours of WSHH, WZPT and WYJK-FM at the proposed W261AX site is attached as Exhibit B2

We have calculated that the signal of WSHH at the proposed W261AX site is greater than 74.66 dBu (50/10). As such, the interfering contour of the translator would need to be above 114.66 dBu (50/10) to cause interference to WSHH. The proposed W261AX interfering contour extends 0.09 kilometer from the tower. The signal of WZPT at the proposed W261AX site is greater than 63.60 dBu (50/10). As such, the interfering contour of the translator would need to

be above 103.60 dBu (50/10) to cause interference to WZPT. The proposed W261AX interfering contour extends 0.33 kilometer from the tower. The signal of WYJK-FM at the proposed W261AX site is greater than 57.92 dBu (50/10). As such, the interfering contour of the translator would need to be above 97.92 dBu (50/10) to cause interference to WYJK-FM. The proposed W261AX signal extends 0.63 kilometer from the tower.

The property on which the proposed W261AX site located is private property (a former coal cleaning facility) of 1000+ acres, which is fenced and gated. The property has no structures, buildings, public roads or population within its boundaries, as noted on Exhibit B3. Therefore, no interference will be delivered to any of the stations noted above within any public area or area with public access. Since the interference from W261AX is over an unpopulated area, it is believed that the proposed W261AX is in compliance with §74.1204(d) of the Commission's rules. If a waiver of the rule is needed, one is respectfully requested.

MINOR CHANGE APPLICATION
RADIO POWER, INC.
W261AX FM TRANSLATOR
CH 261D - 100.1 MHZ - 0.050 KW
OAKDALE, PENNSYLVANIA
July 2010

EXHIBIT B1

Interference Review for W261AX, Oakdale, Pennsylvania
Using Proposed Site as Reference

REFERENCE CH# 261D - 100.1 MHz, Pwr= 0.05 kW, HAAT= 78.0 M, COR= 418.5 M DISPLAY DATES
 40 25 00.0 N. Average Protected F(50-50)= 7.6 km DATA 07-23-10
 80 18 05.0 W. Omni-directional SEARCH 07-23-10

| CH CITY | CALL | TYPE ANT STATE | AZI. <-- | DIST FILE # | LAT. LNG. | Pwr (kW) HAAT (M) | INT (km) COR (M) | PRO (km) LICENSEE | *IN* (Overlap in km) | *OUT* |
|--------------------------|---------|-------------------|----------------|--------------------------|--------------------------|----------------------|---------------------|-------------------------------------|-------------------------|---------|
| 261D Weirton | W261AX | LIC V WV | 264.9 84.8 | 13.9 BLFT20100719ADJ | 40 24 20.0 80 27 52.0 | 0.075 | 20.0 388 | 6.0 Radio Power Inc. | -13.5*< | -16.9< |
| * 259B Pittsburgh | WSHH | LIC CX PA | 78.2 258.4 | 25.7 BLH20060810AFK | 40 27 48.0 80 00 16.0 | 15.500 274 | 5.6 584 | 65.3 Renda Broadcasting Corp. | 12.7 | -40.6*< |
| * 264B New Kensington | WZPT | LIC DCN PA | 76.5 256.7 | 26.7 BLH20000204ABI | 40 28 20.0 79 59 41.0 | 14.500 280 | 2.2 592 | 43.4 Cbs Radio Holdings Inc. | 17.2 | -17.6*< |
| * 263B Bellaire | WYJK-FM | LIC CN OH | 223.4 43.1 | 58.2 BLH19881118KB | 40 02 09.0 80 46 16.0 | 48.000 152 | 6.2 470 | 66.8 Keymarket Licenses, Llc | 45.5 | -9.5*< |
| 261A Morgantown | WCLG-FM | LIC CN WV | 162.0 342.3 | 92.1 BLH19901214KG | 39 37 40.0 79 58 11.0 | 6.000 91 | 92.3 464 | 32.5 Bowers Broadcasting Corp. | -6.8*< | 37.7 |
| 261A Kent | WNIR | LIC NC OH | 311.2 130.5 | 117.5 BLH20000118ABB | 41 06 28.0 81 21 19.0 | 4.200 120 | 83.4 456 | 27.7 Media-com, Inc. | 25.9 | 62.2 |
| 260A Uhrichsville | WTUZ | LIC C OH | 271.8 91.1 | 96.1 BLH20000612AAQ | 40 26 19.0 81 26 01.0 | 5.300 106 | 43.9 412 | 28.5 Wtuz Radio, Inc. | 44.8 | 57.0 |
| 262D Mount Pleasant | 641351 | APP C PA | 108.6 289.0 | 63.5 BNPFT20030317EKH | 40 14 00.0 79 35 39.0 | 0.010 | 8.7 440 | 6.2 Educational Media Foundation | 46.6 | 45.7 |
| 262D Mount Pleasant | 1044208 | APP C PA | 108.6 289.0 | 63.5 BNPFT20030826AQA | 40 14 00.0 79 35 39.0 | 0.006 | 7.9 454 | 5.6 Educational Media Foundation | 47.4 | 46.3 |

Terrain database is NGDC 30 SEC, R= 73.215 qualifying spacings or FCC minimum spacings in KM, M= Margin in KM
 Contour distances are on direct line to and from reference station. Reference Zone = 1, Co to 3rd adjacent.
 Ant Column: (D= DA Standard, Z= DA 73.215, N= Not DA 73.215, _= Omni), Polarization (C,H,V,E), Beamtilt (Y,N,X)
 "*"affixed to 'IN' or 'OUT' values = site inside protected contour.
 "<" = Contour Overlap

* See Exhibit B for details regarding this predicted interference.

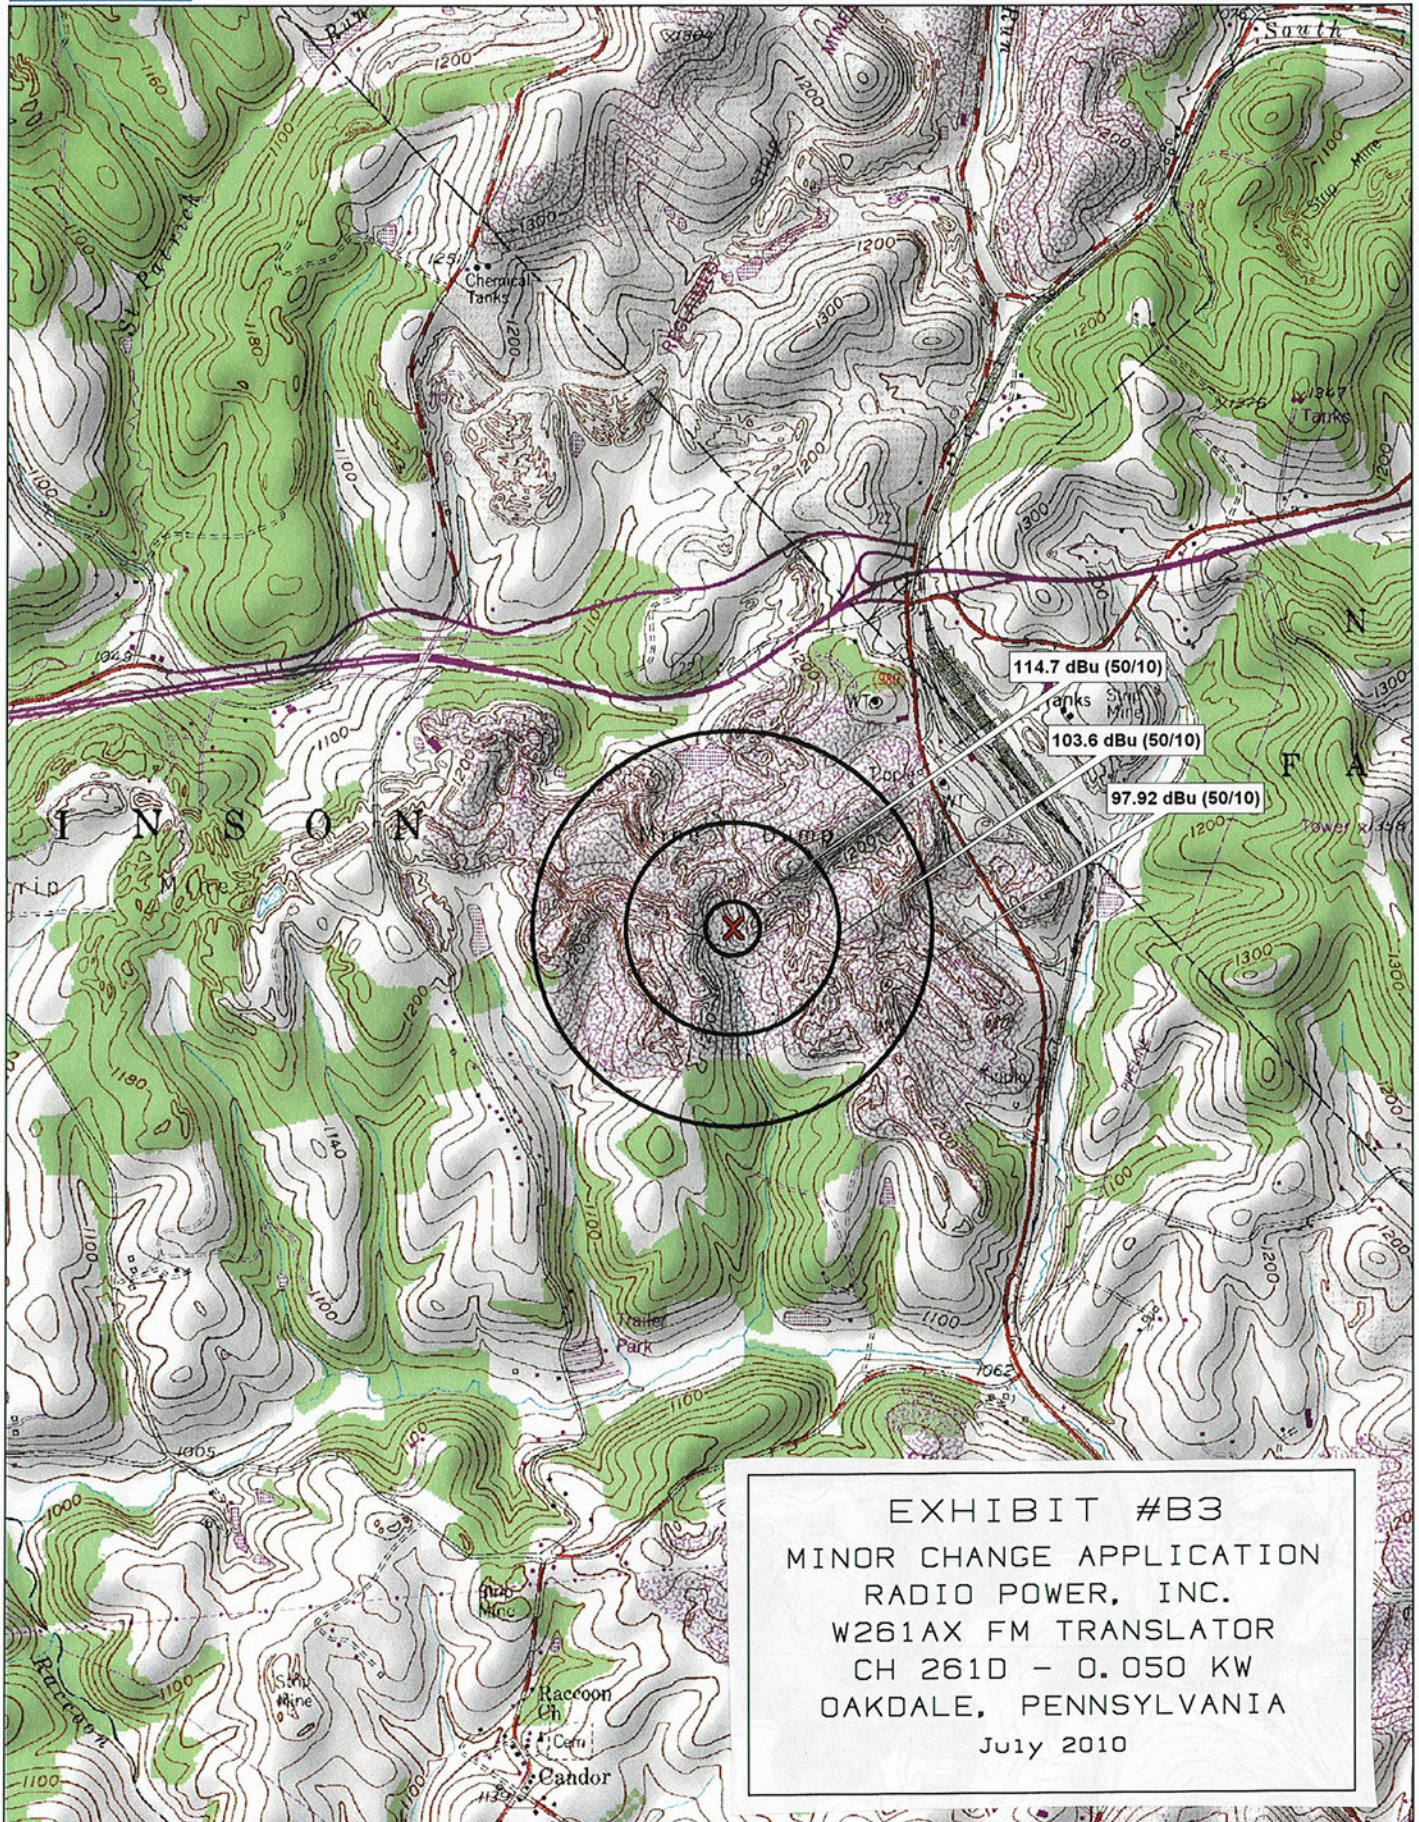


EXHIBIT #B3
 MINOR CHANGE APPLICATION
 RADIO POWER, INC.
 W261AX FM TRANSLATOR
 CH 261D - 0.050 KW
 OAKDALE, PENNSYLVANIA
 July 2010

MINOR CHANGE APPLICATION
RADIO POWER, INC.
W261AX FM TRANSLATOR
CH 261D - 100.1 MHZ - 0.050 KW
OAKDALE, PENNSYLVANIA
July 2010

EXHIBIT B4

Predicted contours:

North Latitude: 40° 25' 00" - Tabulated Protected and Interfering Contour Data
West Longitude: 80° 18' 05" - W261AX FM Translator Station, Oakdale, Pennsylvania

| HAAT and Distance to Contour - NGDC 30 Second terrain database | | | | | | | | | | | |
|--|------|--------|--------|-------|-------|-------|-------|--------|---------|----------|----------|
| Azi. | HAAT | ERP kW | dBk | Field | 60-F5 | 40-F1 | 54-F1 | 100-F1 | 97.9-F1 | 103.6-F1 | 114.7-F1 |
| 000 | 98.7 | 0.0500 | -13.01 | 1.000 | 8.63 | 28.79 | 12.10 | 0.50 | 0.63 | 0.33 | 0.09 |
| 010 | 67.9 | 0.0500 | -13.01 | 1.000 | 7.08 | 23.72 | 10.17 | 0.50 | 0.63 | 0.33 | 0.09 |
| 020 | 77.7 | 0.0500 | -13.01 | 1.000 | 7.57 | 25.34 | 10.81 | 0.50 | 0.63 | 0.33 | 0.09 |
| 030 | 79.4 | 0.0500 | -13.01 | 1.000 | 7.67 | 25.63 | 10.92 | 0.50 | 0.63 | 0.33 | 0.09 |
| 040 | 85.6 | 0.0500 | -13.01 | 1.000 | 7.98 | 26.67 | 11.31 | 0.50 | 0.63 | 0.33 | 0.09 |
| 050 | 96.8 | 0.0500 | -13.01 | 1.000 | 8.53 | 28.48 | 11.98 | 0.50 | 0.63 | 0.33 | 0.09 |
| 060 | 97.3 | 0.0500 | -13.01 | 1.000 | 8.56 | 28.56 | 12.01 | 0.50 | 0.63 | 0.33 | 0.09 |
| 070 | 82.8 | 0.0500 | -13.01 | 1.000 | 7.84 | 26.20 | 11.14 | 0.50 | 0.63 | 0.33 | 0.09 |
| 080 | 78.4 | 0.0500 | -13.01 | 1.000 | 7.61 | 25.46 | 10.86 | 0.50 | 0.63 | 0.33 | 0.09 |
| 090 | 90.6 | 0.0500 | -13.01 | 1.000 | 8.23 | 27.48 | 11.62 | 0.50 | 0.63 | 0.33 | 0.09 |
| 100 | 97.3 | 0.0500 | -13.01 | 1.000 | 8.56 | 28.57 | 12.02 | 0.50 | 0.63 | 0.33 | 0.09 |
| 110 | 84.0 | 0.0500 | -13.01 | 1.000 | 7.90 | 26.40 | 11.21 | 0.50 | 0.63 | 0.33 | 0.09 |
| 120 | 81.9 | 0.0500 | -13.01 | 1.000 | 7.79 | 26.05 | 11.08 | 0.50 | 0.63 | 0.33 | 0.09 |
| 130 | 73.1 | 0.0500 | -13.01 | 1.000 | 7.34 | 24.58 | 10.51 | 0.50 | 0.63 | 0.33 | 0.09 |
| 140 | 67.3 | 0.0500 | -13.01 | 1.000 | 7.05 | 23.63 | 10.13 | 0.50 | 0.63 | 0.33 | 0.09 |
| 150 | 66.6 | 0.0500 | -13.01 | 1.000 | 7.01 | 23.50 | 10.07 | 0.50 | 0.63 | 0.33 | 0.09 |
| 160 | 60.3 | 0.0500 | -13.01 | 1.000 | 6.70 | 22.47 | 9.63 | 0.50 | 0.63 | 0.33 | 0.09 |
| 170 | 55.9 | 0.0500 | -13.01 | 1.000 | 6.46 | 21.65 | 9.28 | 0.50 | 0.63 | 0.33 | 0.09 |
| 180 | 46.2 | 0.0500 | -13.01 | 1.000 | 5.87 | 19.50 | 8.33 | 0.50 | 0.63 | 0.33 | 0.09 |
| 190 | 51.2 | 0.0500 | -13.01 | 1.000 | 6.19 | 20.68 | 8.85 | 0.50 | 0.63 | 0.33 | 0.09 |
| 200 | 58.5 | 0.0500 | -13.01 | 1.000 | 6.60 | 22.15 | 9.49 | 0.50 | 0.63 | 0.33 | 0.09 |
| 210 | 59.0 | 0.0500 | -13.01 | 1.000 | 6.63 | 22.24 | 9.53 | 0.50 | 0.63 | 0.33 | 0.09 |
| 220 | 59.8 | 0.0500 | -13.01 | 1.000 | 6.67 | 22.37 | 9.59 | 0.50 | 0.63 | 0.33 | 0.09 |
| 230 | 69.4 | 0.0500 | -13.01 | 1.000 | 7.16 | 23.97 | 10.27 | 0.50 | 0.63 | 0.33 | 0.09 |
| 240 | 69.1 | 0.0500 | -13.01 | 1.000 | 7.14 | 23.92 | 10.25 | 0.50 | 0.63 | 0.33 | 0.09 |
| 250 | 97.3 | 0.0500 | -13.01 | 1.000 | 8.56 | 28.57 | 12.02 | 0.50 | 0.63 | 0.33 | 0.09 |
| 260 | 79.7 | 0.0500 | -13.01 | 1.000 | 7.68 | 25.68 | 10.94 | 0.50 | 0.63 | 0.33 | 0.09 |
| 270 | 69.8 | 0.0500 | -13.01 | 1.000 | 7.18 | 24.04 | 10.30 | 0.50 | 0.63 | 0.33 | 0.09 |
| 280 | 75.7 | 0.0500 | -13.01 | 1.000 | 7.47 | 25.01 | 10.68 | 0.50 | 0.63 | 0.33 | 0.09 |
| 290 | 82.8 | 0.0500 | -13.01 | 1.000 | 7.84 | 26.19 | 11.13 | 0.50 | 0.63 | 0.33 | 0.09 |
| 300 | 80.0 | 0.0500 | -13.01 | 1.000 | 7.69 | 25.73 | 10.96 | 0.50 | 0.63 | 0.33 | 0.09 |
| 310 | 88.1 | 0.0500 | -13.01 | 1.000 | 8.11 | 27.07 | 11.46 | 0.50 | 0.63 | 0.33 | 0.09 |
| 320 | 87.8 | 0.0500 | -13.01 | 1.000 | 8.09 | 27.03 | 11.45 | 0.50 | 0.63 | 0.33 | 0.09 |
| 330 | 97.3 | 0.0500 | -13.01 | 1.000 | 8.56 | 28.56 | 12.01 | 0.50 | 0.63 | 0.33 | 0.09 |
| 340 | 79.3 | 0.0500 | -13.01 | 1.000 | 7.66 | 25.62 | 10.92 | 0.50 | 0.63 | 0.33 | 0.09 |
| 350 | 92.0 | 0.0500 | -13.01 | 1.000 | 8.30 | 27.71 | 11.70 | 0.50 | 0.63 | 0.33 | 0.09 |

AMSL= 418.5