

[Exhibit 12]

## **Non-Interference Compliance**

Regarding FCC File Number: BNPFT-20030317JFW

Channel: 271

### **Description of Exhibit 12 Contents**

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all the applicable rule sections and that this application for a construction permit is in full compliance with 47 CFR 74.1204.

Page 2 of this exhibit is an explanation of the tabulated data, which is included as evidence on page 4 of this exhibit.

Page 3 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference protection provisions based on 47 CFR 74.1204(d), which states:

*"an application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable."*

In addition, page 3 includes a tabulation of the second and third adjacent stations which this application is required to protect and the field strengths of those stations in the vicinity of the proposed translator. The field strengths given were based on contours predicted using FCC contour algorithms and 3 arc second terrain data.

**Let it be noted that should any actual real world interference occur, the applicant certifies that it will promptly suspend operation of this translator in accordance with 47 CFR 74.1203.**

Page 4 of this exhibit is the tabulated data from the interference analysis, which shows all stations that this application had to consider for contour protection. These tabulated values were generated using high resolution 3 arc second terrain data for the best possible accuracy.

Page 5 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 min quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using a free-space calculation (see FCC 98-117, Appendix A, pg. 41 for reference to the equation used).

## **Explanation of Frequency Finder Results**

The interference analysis for this application was performed using the "Frequency Finder" module in RadioSoft's Comstudy, version 2.2.

Frequency Finder analyzes data taken directly from the FCC's FM database and looks for prohibited overlap with contours of adjacent stations and prohibited proximity to stations 53 or 54 channels from the proposed station (IF) using 3 arc second terrain data and the FCC's contour algorithms. The results tabulated are the stations returned from that analysis. (Note: Because Comstudy was looking at the FCC's FM database, it took into account the proposed translator when doing the analysis and returned it in the tabulated results. For the sake of simplicity, that record has been deleted from all tabulated results.)

The first several columns of the table are self-explanatory. They give various data on the stations in question. The column labeled "Clr" gives the proposed translator's "clearance" with respect to the tabulated station, either in dB or km. The values listed with no units are given in km and are for stations located on an IF to the proposed site's channel.

**A negative value in the "Clr" column does NOT necessarily represent prohibited contour overlap, as explained below.**

A negative value listed in the "Clr" column would indicate either overlap of interference and protected contours or prohibited proximity to an IF station except in the following situations:

-Since the proposed station's Effective Radiated Power (ERP) is 34 watts, a negative value in km (no units listed in the table) does not represent a violation of the CFR, according to 47 CFR 1204(g), which states that "FM translator stations and booster stations operating with less than 100 watts ERP will be treated as class D stations and will not be subject to intermediate frequency separation requirements."

- A second or third adjacent LP100 station cannot represent a violation of the CFR, as 47 CFR 74.1204(a)(4) requires protection of only co-channel and first adjacent LP100 stations.

- 47 CFR 74.1204(a) requires only the protection of "AUTHORIZED commercial or noncommercial educational FM broadcast stations, FM translators, ..." Any entry with a status listed as "RSV," "USE" or "APP" does not represent an authorized station and therefore is not protected under 47 CFR 74.1204. The one exception is the case of LP100 applications. The note to 47 CFR 74.1204(a)(4) states that "LPFM applications and permits that have not yet been licensed must be considered as operating with the maximum permitted facilities." Therefore, any first adjacent or co-channel LP100 station, no matter the status, is protected.

-Entries highlighted in red are those stations where there is overlap of predicted contours and lack of population has been demonstrated within the area of interference.

## Compliance with 47 CFR 74.1204(d)

The proposed translator's Maximum Effective Radiated Power (ERP) is 0.034kW at 15 meters above ground level. According to 47 CFR, 74.1204(a), the desired to undesired ratio between 2nd/3rd adjacent stations is 40dB, making the proposed translator's interfering contour 107.4dBu F(50,10).

Using a free-space calculation (equation referenced in FCC 98-117, Appendix A, pg. 41), this proposed translator's F(50,10) interference contour was calculated and plotted on the pertinent portion of a USGS quadrangle (page 5 of this exhibit). As demonstrated on the quadrangle, there are no populated structures or highways within the calculated area of interference (Note: FCC 02-244, II, A, 6 states that USGS quadrangles are sufficient for demonstrating lack of population). Hence, in accordance with 47 CFR 74.1204(d) and the clarification provided by the FCC in the decision Re: Living Way Ministries (FCC 02-244), a lack of population has been demonstrated within the area of interference and therefore this application is in full compliance with 47 CFR 74.1204.

CORAGL: 15m  
Maximum ERP: 0.034kW

Antenna Manufacturer: SWR  
Antenna Model: FM1


F(50,10) Interfering Contour: 107.4dBu  
F(50,10) Max Distance: 174.5m

The F(50,50) signal strength of all relevant second and third adjacent stations have been examined, and are tabulated below. Column three shows the station's signal level at the proposed translator's tower site, and column four gives the minimum value within the entire proposed translator's standard F(50,10) contour (100 dBu for most classes, 94 dBu for class B's, 97 dBu for class B1's). For signal levels too great to determine, 999 was entered. The minimum F(50,50) contour within the proposed translator's standard F(50,10) contour was used to calculate the proposed translator's interference contour, thereby assuring a minimum undesired-to-desired ratio of 40dB for all relevant adjacent stations, as required in 47 CFR, 74.1204(a).

FCC File Number	Call Sign	F(50,50) Contour at Tower	Min. F(50,50) Contour
BLH19940818KE	KCVI	67.7dBu	67.4dBu
Minimum F(50,50) Protected Contour of Adjacent Station Within Proposed Translator's standard F(50,10) Contour:			<b>67.4dBu</b>

Frequency Finder

Callsign	State	City	Channel	ERP_w	Licensee	ARN	Class	Status	Distance_km	Clr	Facility_id
KCHQ	ID	DRIGGS	271	15000	TED W. AUSTIN, JR.	BPH20030214ABC	C1	APP	47.23	-19.93 dB	87925
KCHQ	ID	DRIGGS	271	15000	TED W. AUSTIN, JR.	BPH20030214ABC	C1	APP	47.23	-19.93 dB	87925
KCVI	ID	BLACKFOOT	268	100000	WESTERN COMMUNICATIONS, INC.	BLH19940818KE	C	LIC	62.88	-8.01 dB	71785
K217EJ	ID	IDAHO FALLS	217	41	EDUCATIONAL MEDIA FOUNDATION	BPFT20010330AER	D	CP	0.1	0.1	88556
KMGI	ID	POCATELLO	273	100000	PACIFIC EMPIRE COMMUNICATIONS C	BLH19871216KF	C	LIC	90.86	3.23 dB	51215
NEW	ID	POCATELLO	270	50	RADIO ASSIST MINISTRY INC.	BNPFT20030317EQN	D	APP	83.04	8.51 dB	150674
981215MK	ID	RIRIE	217	90	FAITH COMMUNICATIONS CORP.	BPED19990527MF	A	APP	24.15	14.1	92376
KCHQ	ID	DRIGGS	271	7000	TED W. AUSTIN, JR.	BLH20030424ABM	C3	LIC	64.24	19.27 dB	87925
NEW	WY	TETON VILLAGE	269	10	TED W. AUSTIN, JR.	BNPFT20030317CRL	D	APP	82.31	20.46 dB	145808
NEW	ID	POCATELLO	271	50	RADIO ASSIST MINISTRY, INC	BNPFT20030317JHJ	D	APP	83.04	22.51 dB	148647
NEW	ID	POCATELLO	271	10	CALVARY CHAPEL OF TWIN FALLS, INC	BNPFT20030310AYJ	D	APP	95.06	22.82 dB	139306
NEW	WY	WILSON	269	10	TED W. AUSTIN, JR.	BNPFT20030317CLU	D	APP	75.55	28.48 dB	145863
NEW	ID	BURLEY	270	250	RADIO ASSIST MINISTRY INC.	BNPFT20030317EOD	D	APP	177.03	28.93 dB	150672
KCHQ	ID	DRIGGS	271	0	TED W. AUSTIN, JR.		C1	RSV	65.23	29.26 dB	87925
970805MC	ID	DRIGGS	271	0	SCOTT DARYL PARKER		C3	USE	65.23	29.26 dB	87847
KCHQ	ID	DRIGGS	271	0	TED W. AUSTIN, JR.		C1	RSV	65.23	29.26 dB	87925
NEW	WY	HOBACK JUNCTIC	267	10	TED W. AUSTIN, JR.	BNPFT20030314BDT	D	APP	99.95	32.74 dB	145929
KMGI	ID	POCATELLO	273	0	PACIFIC EMPIRE COMMUNICATIONS CORP.		C	USE	90.86	36.00 dB	51215
KCVI	ID	BLACKFOOT	268	0	WESTERN COMMUNICATIONS, INC.		C	USE	54.15	39.76 dB	71785
NEW	ID	MONTPELIER	269	250	MAX T. NICHOLS	BNPFT20030317EBR	D	APP	144.32	39.89 dB	146563
NEW	UT	WELLSVILLE	271	250	SUN VALLEY RADIO, INC.	BNPFT20030317KWG	D	APP	221.33	39.96 dB	157293
NEW	ID	MONTPELIER	271	250	MAX T. NICHOLS	BNPFT20030317EAT	D	APP	144.32	39.89 dB	146567

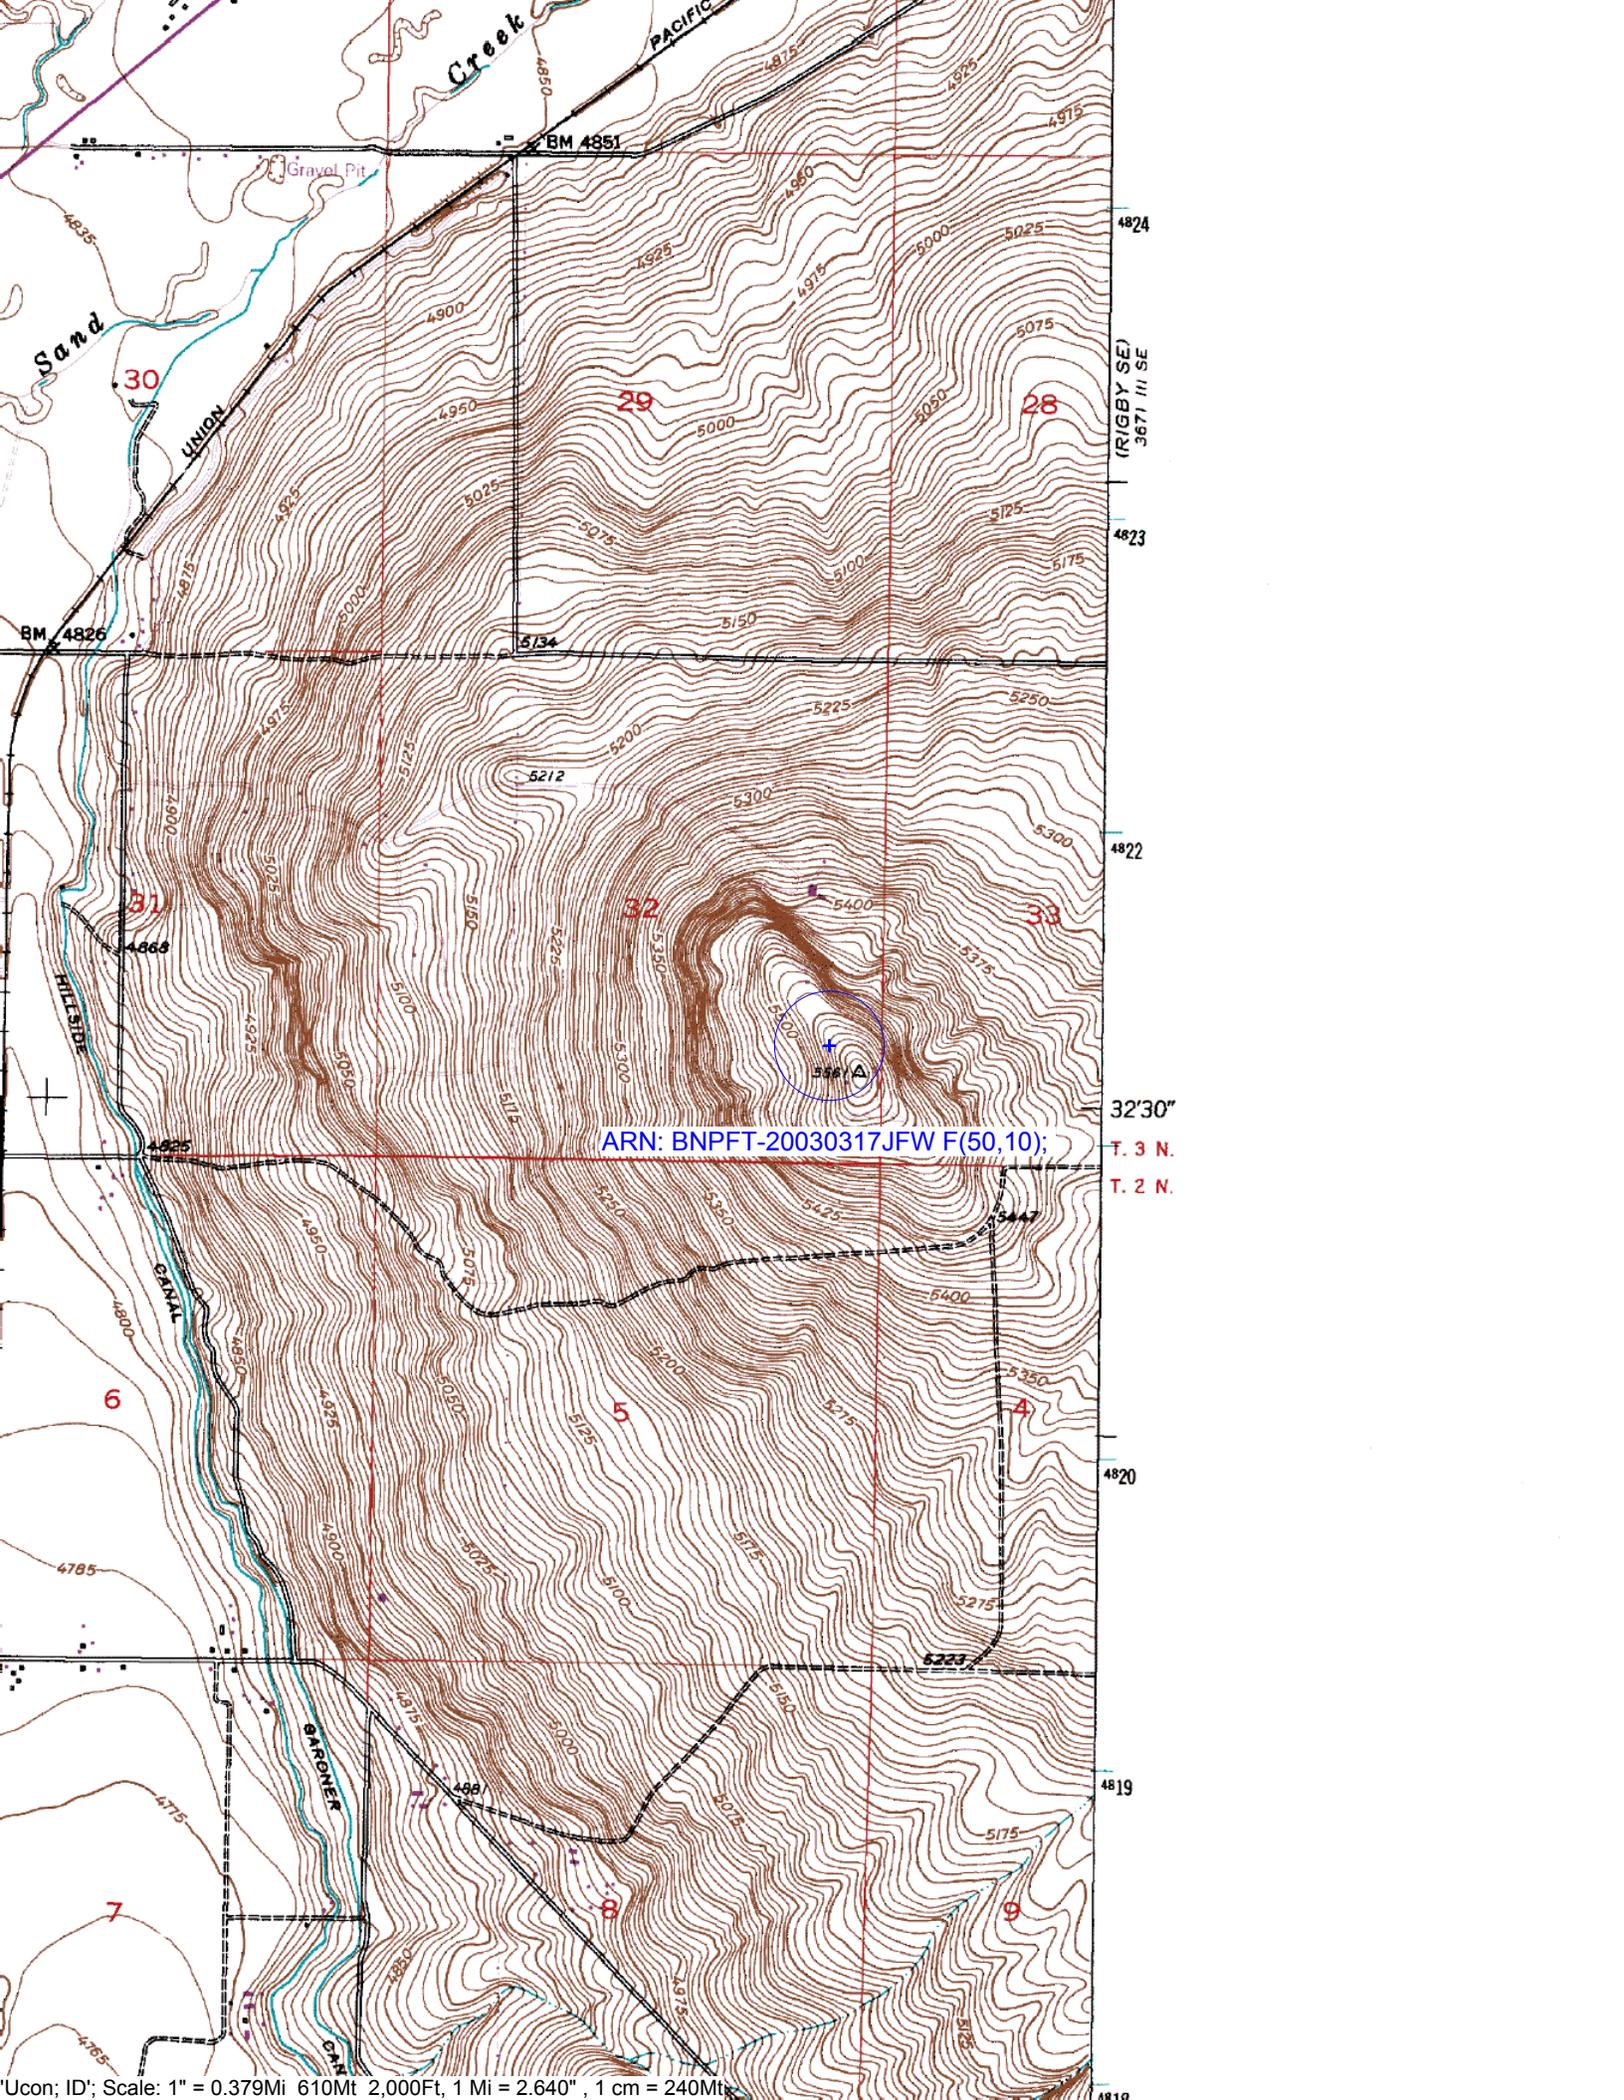

ARN: BNPFT-20030317JFW F(50,10);

4824  
(RIGBY SE)  
3671 III SE

4823

4822

32'30"

T. 3 N.

T. 2 N.

4820

4819