

Proposed Minor Modification

This minor modification specifies changes as indicated below:

	CONSTRUCTION PERMIT	PROPOSED
CHANNEL	247	247
CLASS	D	D
ERP	.010 kW (Circular, non-directional)	.010 kW (Circular, non-directional)
HAAT	430 M	137 M
COORDINATES	38 03 07 / 117 13 30	38 04 08 / 117 13 29
SITE AMSL	2164 M	1867 M
COR AGL	3 M	17 M
COR AMSL	2167 M	1884 M
Tower AGL	9 M	18 M
Tower AMSL	2173 M	1885 M

The proposed modification also specifies a change in the antenna from a Scala GPFM to a Nicom BKG77.

The proposed modification complies with all requirements of Section 74.1204 of the Commission's rules. The proposed 1 mV/m contour will overlap the existing 1 m/vm contour. The below listed pages of this Exhibit contains information as indicated.

Page 2	Tabulation of HAAT / ERP / Distance to 1 mV/m Contour
Page 3	Proposed and Existing 1 mV/m Contour Map
Page 4	Allocation Study


Tabulation of HAAT / ERP / Distance to 1 mV/m Contour

.010 kW ERP non-da 38 04 08 / 117 13 29 1884 M COR AMSL 137 M HAAT

Azi.	AV EL	HAAT	ERP kW	dBk	Field	60-F5
000	1940.7	-56.7	0.0100	-20.00	1.000	3.15
010	1980.8	-96.8	0.0100	-20.00	1.000	3.15
020	1978.1	-94.1	0.0100	-20.00	1.000	3.15
030	1925.5	-41.5	0.0100	-20.00	1.000	3.15
040	1858.2	25.8	0.0100	-20.00	1.000	3.15
050	1824.9	59.1	0.0100	-20.00	1.000	4.49
060	1779.4	104.6	0.0100	-20.00	1.000	5.99
070	1744.2	139.8	0.0100	-20.00	1.000	6.85
080	1717.3	166.7	0.0100	-20.00	1.000	7.49
090	1704.5	179.5	0.0100	-20.00	1.000	7.78
100	1703.0	181.0	0.0100	-20.00	1.000	7.81
110	1706.5	177.5	0.0100	-20.00	1.000	7.74
120	1713.6	170.4	0.0100	-20.00	1.000	7.58
130	1723.6	160.4	0.0100	-20.00	1.000	7.34
140	1751.7	132.3	0.0100	-20.00	1.000	6.68
150	1809.0	75.0	0.0100	-20.00	1.000	5.04
160	1850.2	33.8	0.0100	-20.00	1.000	3.33
170	1836.1	47.9	0.0100	-20.00	1.000	4.01
180	1796.6	87.4	0.0100	-20.00	1.000	5.45
190	1744.8	139.2	0.0100	-20.00	1.000	6.84
200	1697.8	186.2	0.0100	-20.00	1.000	7.92
210	1676.0	208.0	0.0100	-20.00	1.000	8.40
220	1672.8	211.2	0.0100	-20.00	1.000	8.47
230	1693.4	190.6	0.0100	-20.00	1.000	8.01
240	1691.1	192.9	0.0100	-20.00	1.000	8.07
250	1675.8	208.2	0.0100	-20.00	1.000	8.40
260	1652.9	231.1	0.0100	-20.00	1.000	8.88
270	1632.3	251.7	0.0100	-20.00	1.000	9.27
280	1617.4	266.6	0.0100	-20.00	1.000	9.55
290	1610.5	273.5	0.0100	-20.00	1.000	9.67
300	1610.2	273.8	0.0100	-20.00	1.000	9.68
310	1619.4	264.6	0.0100	-20.00	1.000	9.51
320	1643.7	240.3	0.0100	-20.00	1.000	9.06
330	1689.8	194.2	0.0100	-20.00	1.000	8.09
340	1754.4	129.6	0.0100	-20.00	1.000	6.62
350	1841.0	43.0	0.0100	-20.00	1.000	3.78

Average HAAT was determined by the above highlighted radials

Proposed and Existing 1 mV/m Contour

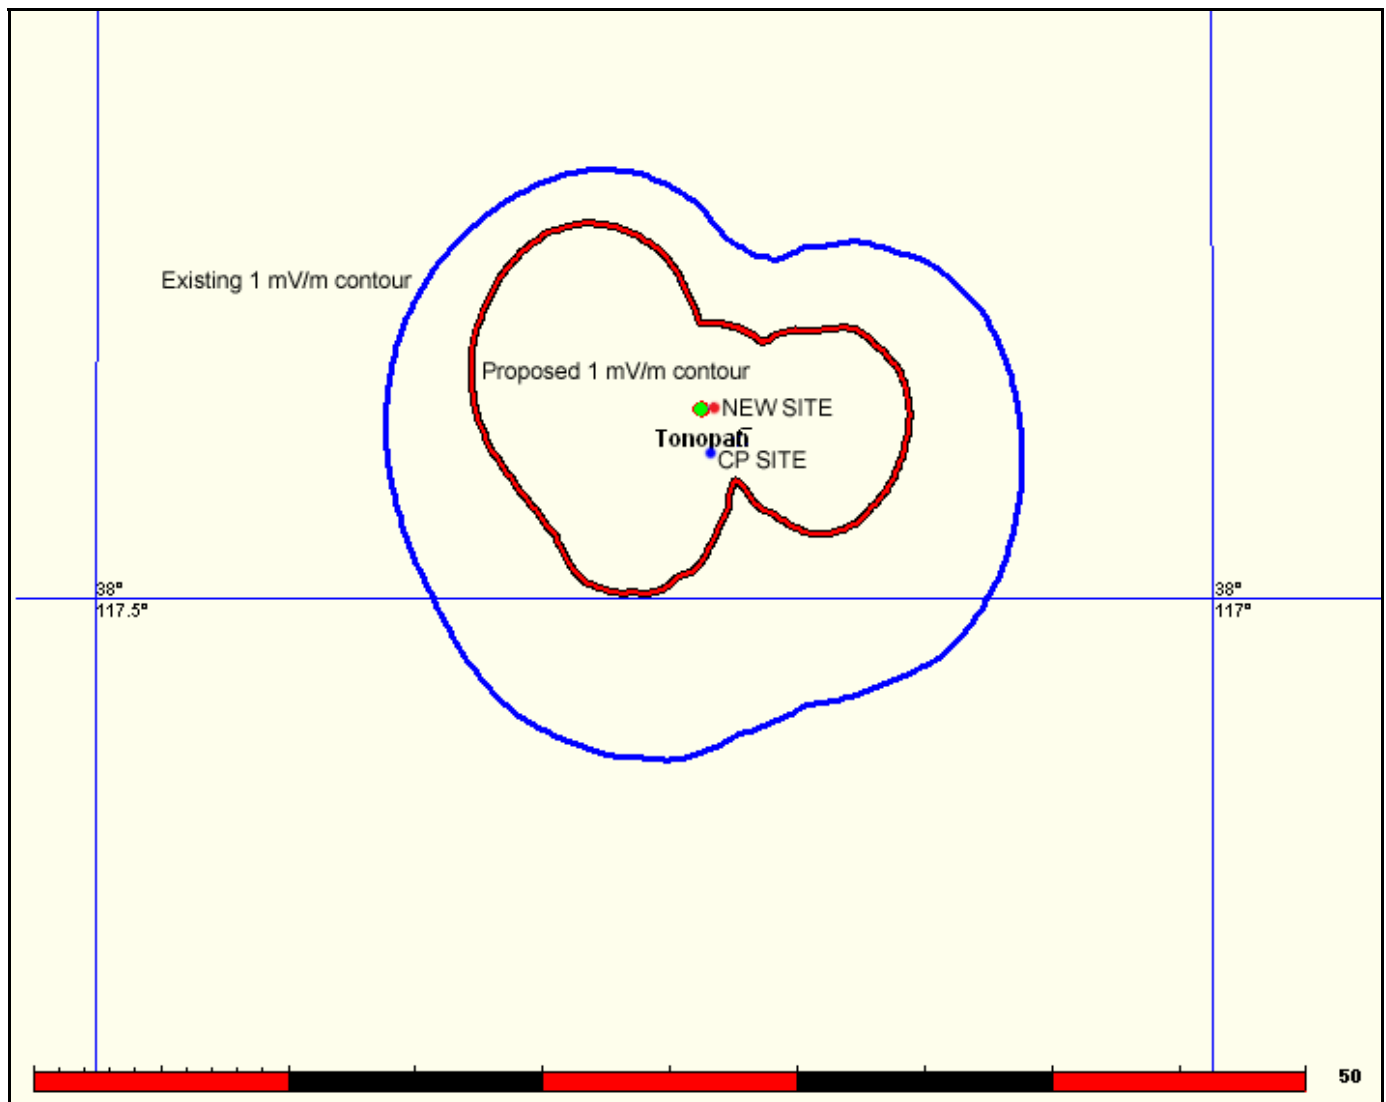

Allocation Study

CH 247 D 38 04 08 / 117 13 29 .010 kW ERP 1884 M COR AMSL 137 M HAAT

CH	CALL	TYPE	AZI.	DIST	LAT.	Pwr(kW)	COR(M)	PRO(km)	*IN*	*OUT*
CITY		STATE	<--	FILE #	LNG.	HAAT(M)	INT(km)	LICENSEE	(Overlap in km)	
Reference station CP:										
247D	K247AX	CP C	180.7	1.88	38 03 07	0.010	2167	9.0	-33.74*	-25.47*
Tonopah		NV	0.7	BNPFT20030828AKT	117 13 30	238	30.0	American Educational Broad		

There are no first, second, or third adjacent stations or i.f. channel stations to be considered.

ERP and HAAT on direct-line with reference station.

***affixed to 'IN' or 'Out' values = site inside protected contour.