

EXHIBIT 43
ENVIRONMENTAL STATEMENT
KSNW-DT 891 KW 312.2 M HAAT CH. 45
WICHITA, KANSAS

The applicant, Emmis Television License, LLC, requests authority to modify its outstanding construction permit for digital television (DTV) station KSNW-DT, Channel 45, Wichita, Kansas for a reduction in effective radiated power (ERP). The applicant is also correcting the site coordinates and ASR information for antenna supporting structure referenced on the underlying construction permit, FCC File No. BMPCDT-20030930BCK. The instant request for minor modification of construction permit is categorically excluded from environmental processing by Section 1.1306 of the Commission's rules since the specified antenna structure (ASRN 1244913) is an existing tower and the safety standards for human exposure to radio-frequency (RF) energy in Section 1.1307(b) will not be exceeded as described below.

The DTV Channel 45 facility of KSNW-DT will not result in RF contributions exceeding the *RF Radiation Exposure Limits* specified in Section 1.1310 of the Commission's rules. The specified modification involves a Dielectric Model TFU-30GTH-R-04 nondirectional antenna that will be positioned 318 meters above ground level (AGL). This horizontally polarized antenna will have 0.75 degree of electrical beam tilt and effective radiated power (ERP) at the main beam elevation will be 891 kW. The maximum permissible exposure (MPE) limits for Channel 45, at the bottom frequency of 656 MHz, are 437.33 $\mu\text{W}/\text{cm}^2$ for general (uncontrolled) exposure and 2,186.67 $\mu\text{W}/\text{cm}^2$ for occupational (controlled) exposure. Compliance with these limits was established based on a "worst case" estimation of ground level power density using the EPA prediction method adopted by the Commission.

The “worst case” power density level accessible at two meters above ground as a result of the KSNW-DT facility modification is calculated to be $2.98 \mu\text{W}/\text{cm}^2$. In reference to the manufacturer’s elevation pattern and tabulation attached as Figures 1 and 2, the antenna relative field does not exceed 0.1 at any angle greater than 10° below the horizontal. Therefore, an antenna relative field value of 0.1 was assumed in determining the above worst case scenario. Since the estimated contribution for the KSNW-DT facility is less than 5% of both the uncontrolled and controlled MPE guidelines, the applicant is not required to further evaluate the antenna location with respect other RF contributors.

It has been demonstrated that the proposal complies with the occupational exposure limit at any ground-level location. At higher elevations on the antenna structure, however, all site users will be protected from excessive exposure to RF fields in accordance with the methods recommended in *OET Bulletin No. 65, Version 97-01*, which includes scheduling tower work in coordination with periods of reduced power operation or while the facility is shut down.

Respectfully submitted,

LOHNES AND CULVER

8309 Cherry Lane
Laurel, MD 20707
301-776-4488

By: D. Scott Turpie


September 2004



Date	23 Sep 2004	
Call Letters	KSNW-DT	Channel 45
Location	Wichita, KS	
Customer	Emmis Television License, LLC	
Antenna Type	TFU-30GTH O4	

ELEVATION PATTERN

RMS Gain at Main Lobe	27.0 (14.31 dB)	Beam Tilt	0.75 Degrees
RMS Gain at Horizontal	18.7 (12.72 dB)	Frequency	659.00 MHz
Calculated / Measured	Calculated	Drawing #	30G270075-90

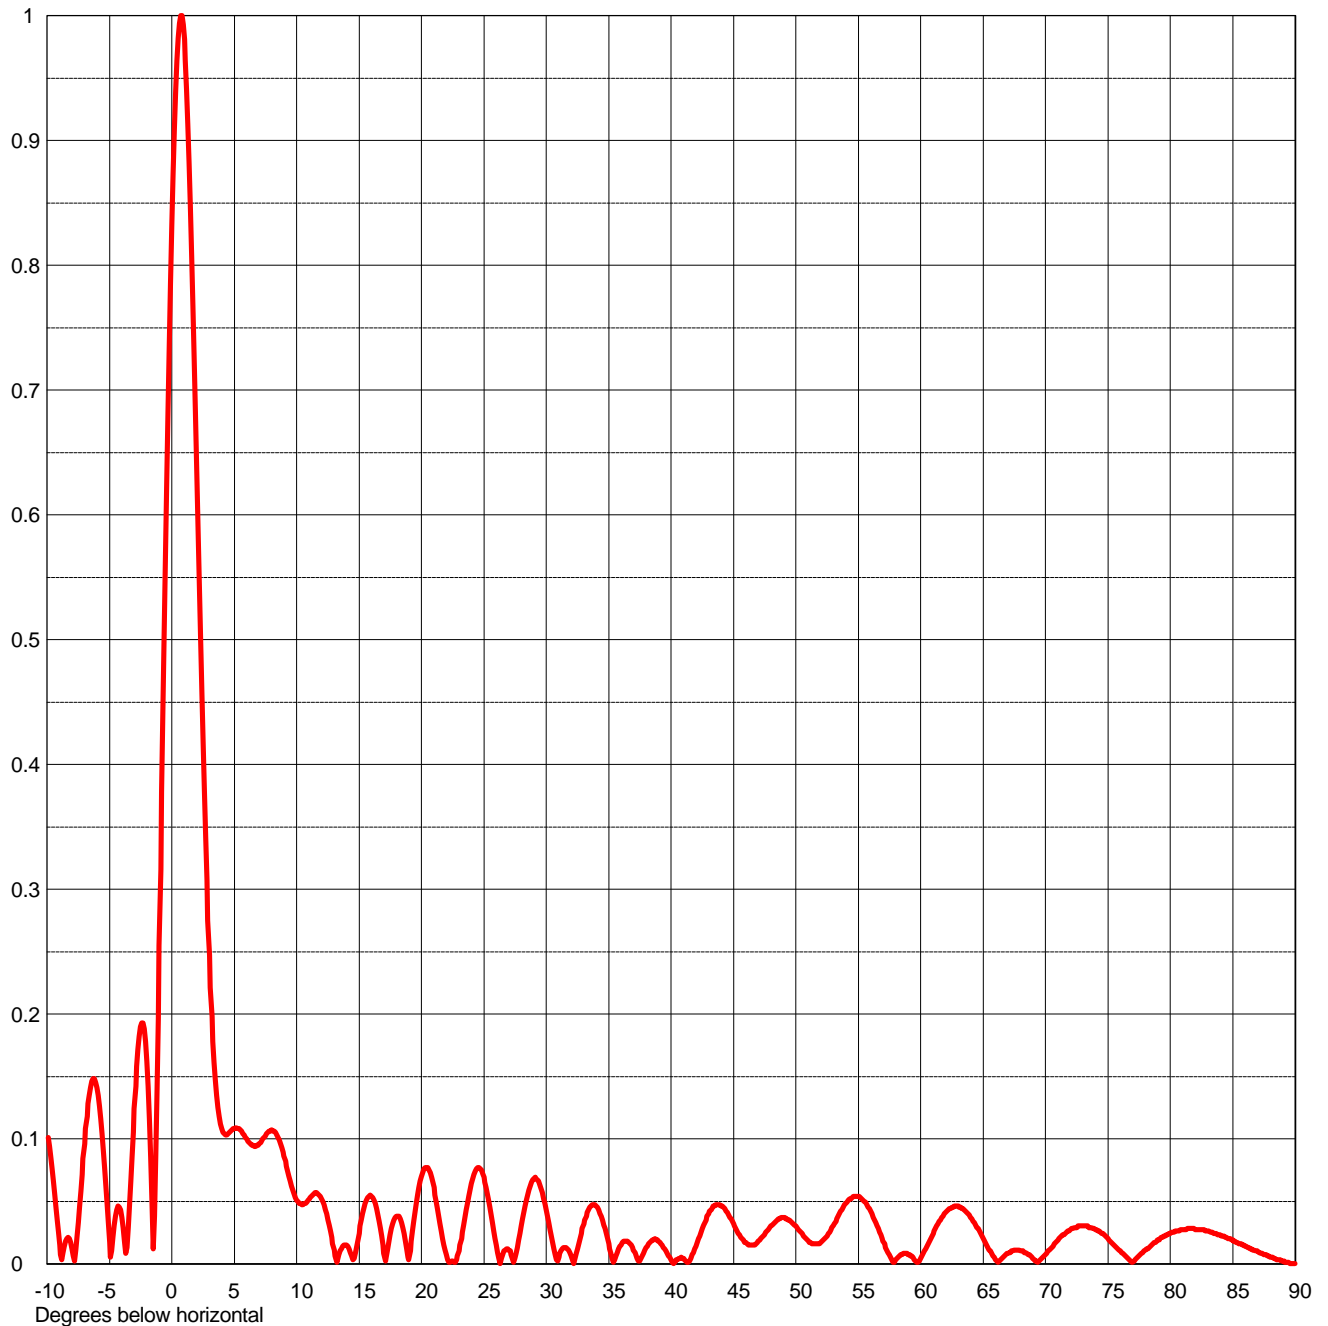

Remarks:



Date	23 Sep 2004	
Call Letters	KSNW-DT	Channel 45
Location	Wichita, KS	
Customer	Emmis Television License, LLC	
Antenna Type	TFU-30GTH O4	

TABULATION OF ELEVATION PATTERN

Elevation Pattern Drawing # **30G270075-90**

Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field
-10.0	0.108	2.4	0.458	10.6	0.048	30.5	0.017	51.0	0.018	71.5	0.023
-9.5	0.066	2.6	0.378	10.8	0.049	31.0	0.005	51.5	0.016	72.0	0.027
-9.0	0.015	2.8	0.307	11.0	0.052	31.5	0.013	52.0	0.017	72.5	0.029
-8.5	0.018	3.0	0.247	11.5	0.057	32.0	0.006	52.5	0.022	73.0	0.030
-8.0	0.012	3.2	0.198	12.0	0.052	32.5	0.012	53.0	0.031	73.5	0.029
-7.5	0.033	3.4	0.161	12.5	0.035	33.0	0.032	53.5	0.040	74.0	0.027
-7.0	0.096	3.6	0.135	13.0	0.011	33.5	0.045	54.0	0.048	74.5	0.024
-6.5	0.141	3.8	0.118	13.5	0.010	34.0	0.046	54.5	0.053	75.0	0.020
-6.0	0.141	4.0	0.108	14.0	0.015	34.5	0.035	55.0	0.054	75.5	0.015
-5.5	0.091	4.2	0.104	14.5	0.003	35.0	0.016	55.5	0.050	76.0	0.010
-5.0	0.017	4.4	0.103	15.0	0.024	35.5	0.003	56.0	0.042	76.5	0.005
-4.5	0.038	4.6	0.105	15.5	0.048	36.0	0.015	56.5	0.030	77.0	0.001
-4.0	0.037	4.8	0.107	16.0	0.054	36.5	0.018	57.0	0.018	77.5	0.006
-3.5	0.029	5.0	0.108	16.5	0.039	37.0	0.011	57.5	0.007	78.0	0.011
-3.0	0.124	5.2	0.109	17.0	0.008	37.5	0.002	58.0	0.003	78.5	0.015
-2.8	0.158	5.4	0.108	17.5	0.023	38.0	0.013	58.5	0.007	79.0	0.019
-2.6	0.182	5.6	0.106	18.0	0.038	38.5	0.019	59.0	0.007	79.5	0.022
-2.4	0.193	5.8	0.103	18.5	0.029	39.0	0.018	59.5	0.003	80.0	0.024
-2.2	0.188	6.0	0.100	19.0	0.003	39.5	0.012	60.0	0.004	80.5	0.026
-2.0	0.162	6.2	0.097	19.5	0.041	40.0	0.003	60.5	0.014	81.0	0.027
-1.8	0.116	6.4	0.095	20.0	0.070	40.5	0.003	61.0	0.024	81.5	0.028
-1.6	0.050	6.6	0.094	20.5	0.077	41.0	0.004	61.5	0.034	82.0	0.027
-1.4	0.038	6.8	0.095	21.0	0.061	41.5	0.002	62.0	0.041	82.5	0.027
-1.2	0.140	7.0	0.096	21.5	0.032	42.0	0.014	62.5	0.045	83.0	0.026
-1.0	0.255	7.2	0.098	22.0	0.007	42.5	0.028	63.0	0.046	83.5	0.024
-0.8	0.378	7.4	0.101	22.5	0.002	43.0	0.040	63.5	0.043	84.0	0.023
-0.6	0.503	7.6	0.104	23.0	0.010	43.5	0.046	64.0	0.037	84.5	0.021
-0.4	0.624	7.8	0.106	23.5	0.037	44.0	0.046	64.5	0.029	85.0	0.019
-0.2	0.735	8.0	0.107	24.0	0.064	44.5	0.041	65.0	0.020	85.5	0.016
0.0	0.832	8.2	0.106	24.5	0.077	45.0	0.032	65.5	0.011	86.0	0.014
0.2	0.909	8.4	0.103	25.0	0.069	45.5	0.023	66.0	0.003	86.5	0.012
0.4	0.964	8.6	0.099	25.5	0.045	46.0	0.017	66.5	0.004	87.0	0.010
0.6	0.994	8.8	0.093	26.0	0.015	46.5	0.015	67.0	0.008	87.5	0.007
0.8	1.000	9.0	0.086	26.5	0.007	47.0	0.018	67.5	0.011	88.0	0.005
1.0	0.981	9.2	0.078	27.0	0.011	47.5	0.023	68.0	0.010	88.5	0.003
1.2	0.941	9.4	0.070	27.5	0.004	48.0	0.030	68.5	0.008	89.0	0.002
1.4	0.882	9.6	0.062	28.0	0.030	48.5	0.035	69.0	0.004	89.5	0.001
1.6	0.808	9.8	0.056	28.5	0.055	49.0	0.037	69.5	0.002	90.0	0.000
1.8	0.724	10.0	0.051	29.0	0.068	49.5	0.035	70.0	0.007		
2.0	0.635	10.2	0.048	29.5	0.063	50.0	0.030	70.5	0.013		
2.2	0.545	10.4	0.047	30.0	0.043	50.5	0.024	71.0	0.019		

Remarks: