
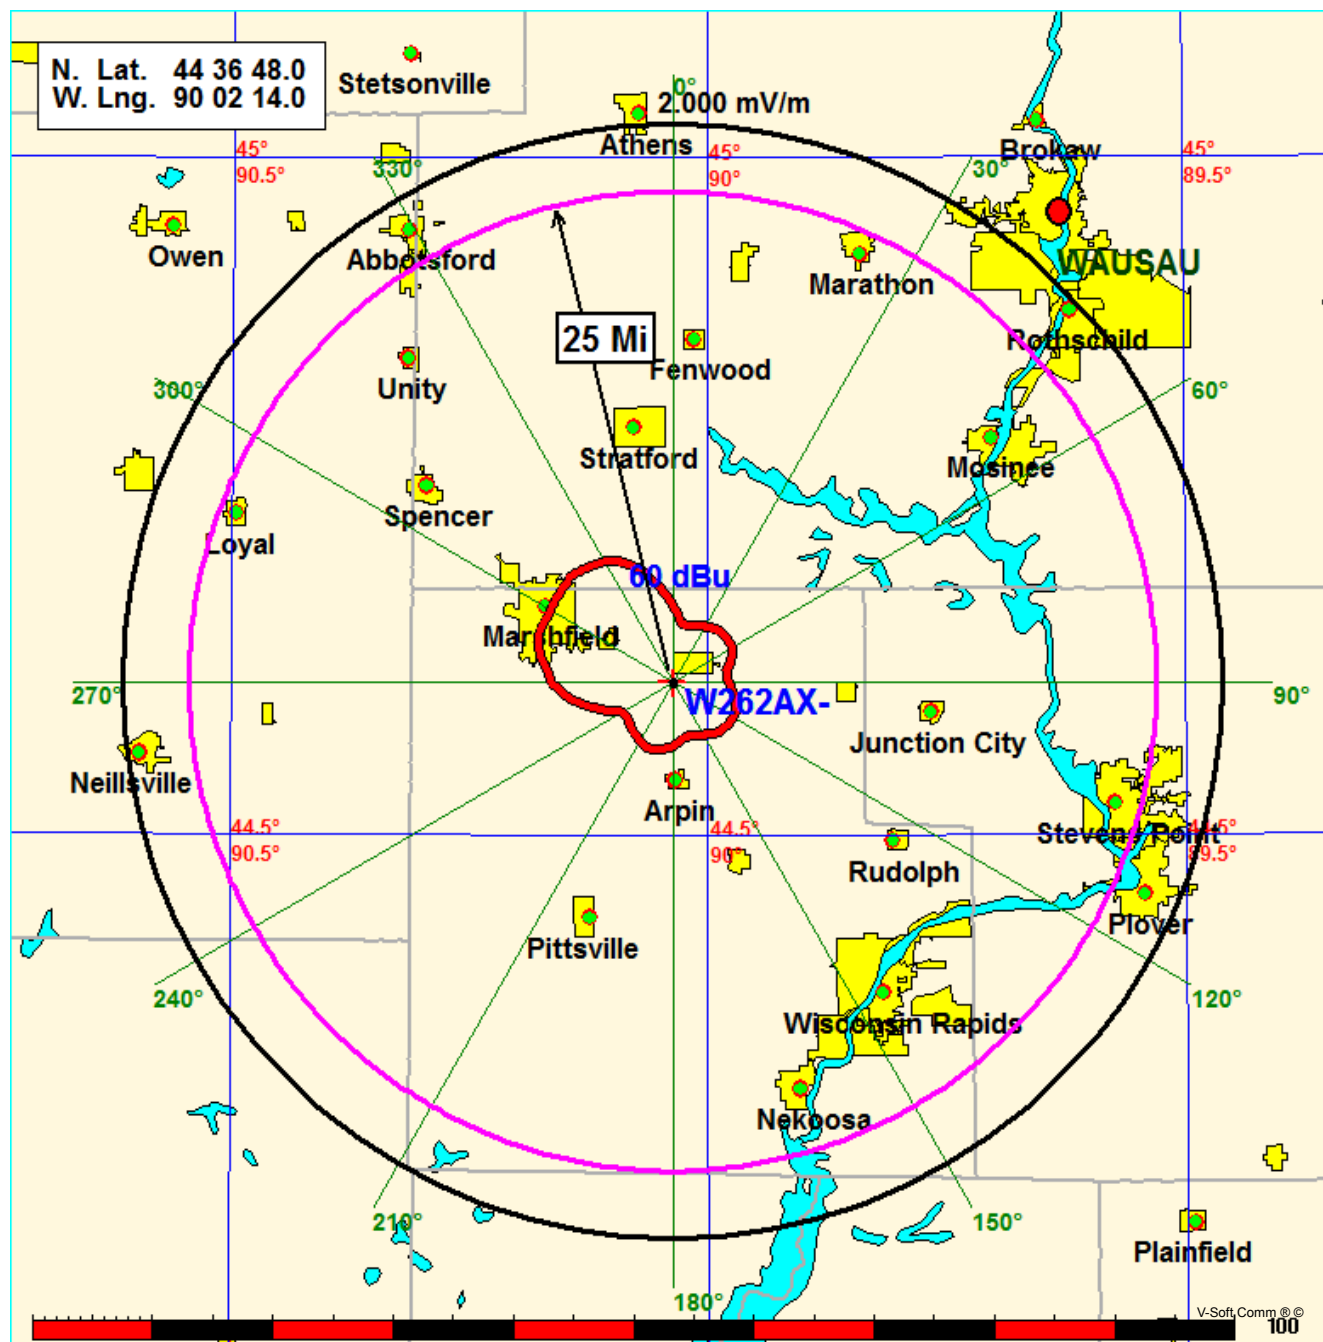


AM Fill-in Map - Primary is WLBL

Coverage Study - GLOBE 30 Sec
11-17-2015

W262AX- CH265 D , 0.16 kW, 127.9m HAAT, 490.7m COR AMSL
Service Contour = 60 dBu. Population = 9,618



N. Lat. = 443648.0 W. Lng. = 900214.0
 HAAT and Distance to Contour,
 FCC, FM 2-10 Mi, 51 pts Method - GLOBE 30 SEC

Proposed 60 dBu Coverage Distance to Contours

Azi.	AV EL	HAAT	ERP kw	dBk	Field	60-F1
000	367.8	122.9	0.0088	-20.54	0.235	6.27
010	368.6	122.1	0.0031	-25.04	0.140	4.76
020	362.2	128.5	0.0030	-25.29	0.136	4.80
030	357.7	133.0	0.0037	-24.32	0.152	5.19
040	357.1	133.6	0.0047	-23.25	0.172	5.56
050	360.0	130.7	0.0057	-22.48	0.188	5.76
060	356.1	134.6	0.0052	-22.85	0.180	5.71
070	358.1	132.6	0.0037	-24.32	0.152	5.18
080	359.0	131.7	0.0024	-26.16	0.123	4.58
090	361.4	129.3	0.0026	-25.81	0.128	4.65
100	358.9	131.8	0.0035	-24.55	0.148	5.09
110	351.7	139.0	0.0047	-23.25	0.172	5.66
120	358.2	132.5	0.0057	-22.43	0.189	5.81
130	358.4	132.3	0.0056	-22.52	0.187	5.78
140	352.0	138.7	0.0045	-23.45	0.168	5.59
150	351.9	138.8	0.0033	-24.85	0.143	5.13
160	350.1	140.6	0.0025	-25.95	0.126	4.81
170	350.2	140.5	0.0026	-25.88	0.127	4.83
180	356.0	134.7	0.0040	-23.99	0.158	5.33
190	359.2	131.5	0.0054	-22.66	0.184	5.71
200	355.5	135.2	0.0056	-22.52	0.187	5.84
210	353.4	137.3	0.0045	-23.45	0.168	5.56
220	353.8	136.9	0.0035	-24.55	0.148	5.19
230	359.1	131.6	0.0029	-25.35	0.135	4.83
240	364.4	126.3	0.0036	-24.38	0.151	5.04
250	369.1	121.6	0.0111	-19.56	0.263	6.59
260	370.2	120.5	0.0315	-15.01	0.444	8.48
270	373.5	117.2	0.0668	-11.75	0.646	10.08
280	377.7	113.0	0.1050	-9.79	0.810	11.06
290	377.9	112.8	0.1360	-8.66	0.922	11.76
300	386.2	104.5	0.1540	-8.13	0.981	11.69
310	381.1	109.6	0.1509	-8.21	0.971	11.89
320	373.2	117.5	0.1310	-8.83	0.905	11.88
330	367.4	123.3	0.0973	-10.12	0.780	11.30
340	365.8	124.9	0.0591	-12.28	0.608	10.08
350	367.4	123.3	0.0262	-15.81	0.405	8.18

Ave EL= 362.51 M HAAT= 128.19 M AMSL= 490.7

AUBURNDALE ,WI

Call: WLBL.L

Coordinates: N 44 36 48 W 90 2 14

Frequency: 930 kHz Number of contours: 1

Azimuth	Radiation (mV/m at one km)	Distances to Contours in Kilometers : Contour levels in mV/m. 2.000
-----	-----	-----
0.0	784.50	45.74
5.0	784.50	45.74
10.0	784.50	45.74
15.0	784.50	45.74
20.0	784.50	45.74
25.0	784.50	45.74
30.0	784.50	45.74
35.0	784.50	45.74
40.0	784.50	45.74
45.0	784.50	45.74
50.0	784.50	45.74
55.0	784.50	45.74
60.0	784.50	45.74
65.0	784.50	45.74
70.0	784.50	45.74
75.0	784.50	45.74
80.0	784.50	45.74
85.0	784.50	45.74
90.0	784.50	45.74
95.0	784.50	45.74
100.0	784.50	45.74
105.0	784.50	45.74
110.0	784.50	45.74
115.0	784.50	45.74
120.0	784.50	45.74
125.0	784.50	45.74
130.0	784.50	45.74
135.0	784.50	45.74
140.0	784.50	45.74
145.0	784.50	45.74
150.0	784.50	45.74
155.0	784.50	45.74
160.0	784.50	45.74
165.0	784.50	45.74
170.0	784.50	45.74
175.0	784.50	45.74
180.0	784.50	45.74
185.0	784.50	45.74
190.0	784.50	45.74
195.0	784.50	45.74
200.0	784.50	45.74
205.0	784.50	45.74
210.0	784.50	45.74
215.0	784.50	45.74
220.0	784.50	45.74
225.0	784.50	45.74
230.0	784.50	45.74
235.0	784.50	45.74
240.0	784.50	45.74
245.0	784.50	45.74
250.0	784.50	45.74
255.0	784.50	45.74
260.0	784.50	45.74
265.0	784.50	45.74
270.0	784.50	45.74
275.0	784.50	45.74
280.0	784.50	45.74
285.0	784.50	45.74
290.0	784.50	45.74
295.0	784.50	45.74
300.0	784.50	45.74
305.0	784.50	45.74
310.0	784.50	45.74
315.0	784.50	45.74
320.0	784.50	45.74
325.0	784.50	45.74
330.0	784.50	45.74

335.0	784.50	45.74
340.0	784.50	45.74
345.0	784.50	45.74
350.0	784.50	45.74
355.0	784.50	45.74