


Proposal Number	DCA-8008	Revision:	1
Date	10-Aug-98		
Call Letters	KSBI	Channel	52/DT51
Location	Oklahoma City, OK		
Customer			
Antenna Type	TFU-30GBH-R O6 DC		

ELEVATION PATTERN


RMS Gain at Main Lobe	26.0 (14.15 dB)	Beam Tilt	0.75 deg
RMS Gain at Horizontal	18.0 (12.55 dB)	Frequency	701.00 MHz
Calculated / Measured	Calculated	Drawing #	30G270075

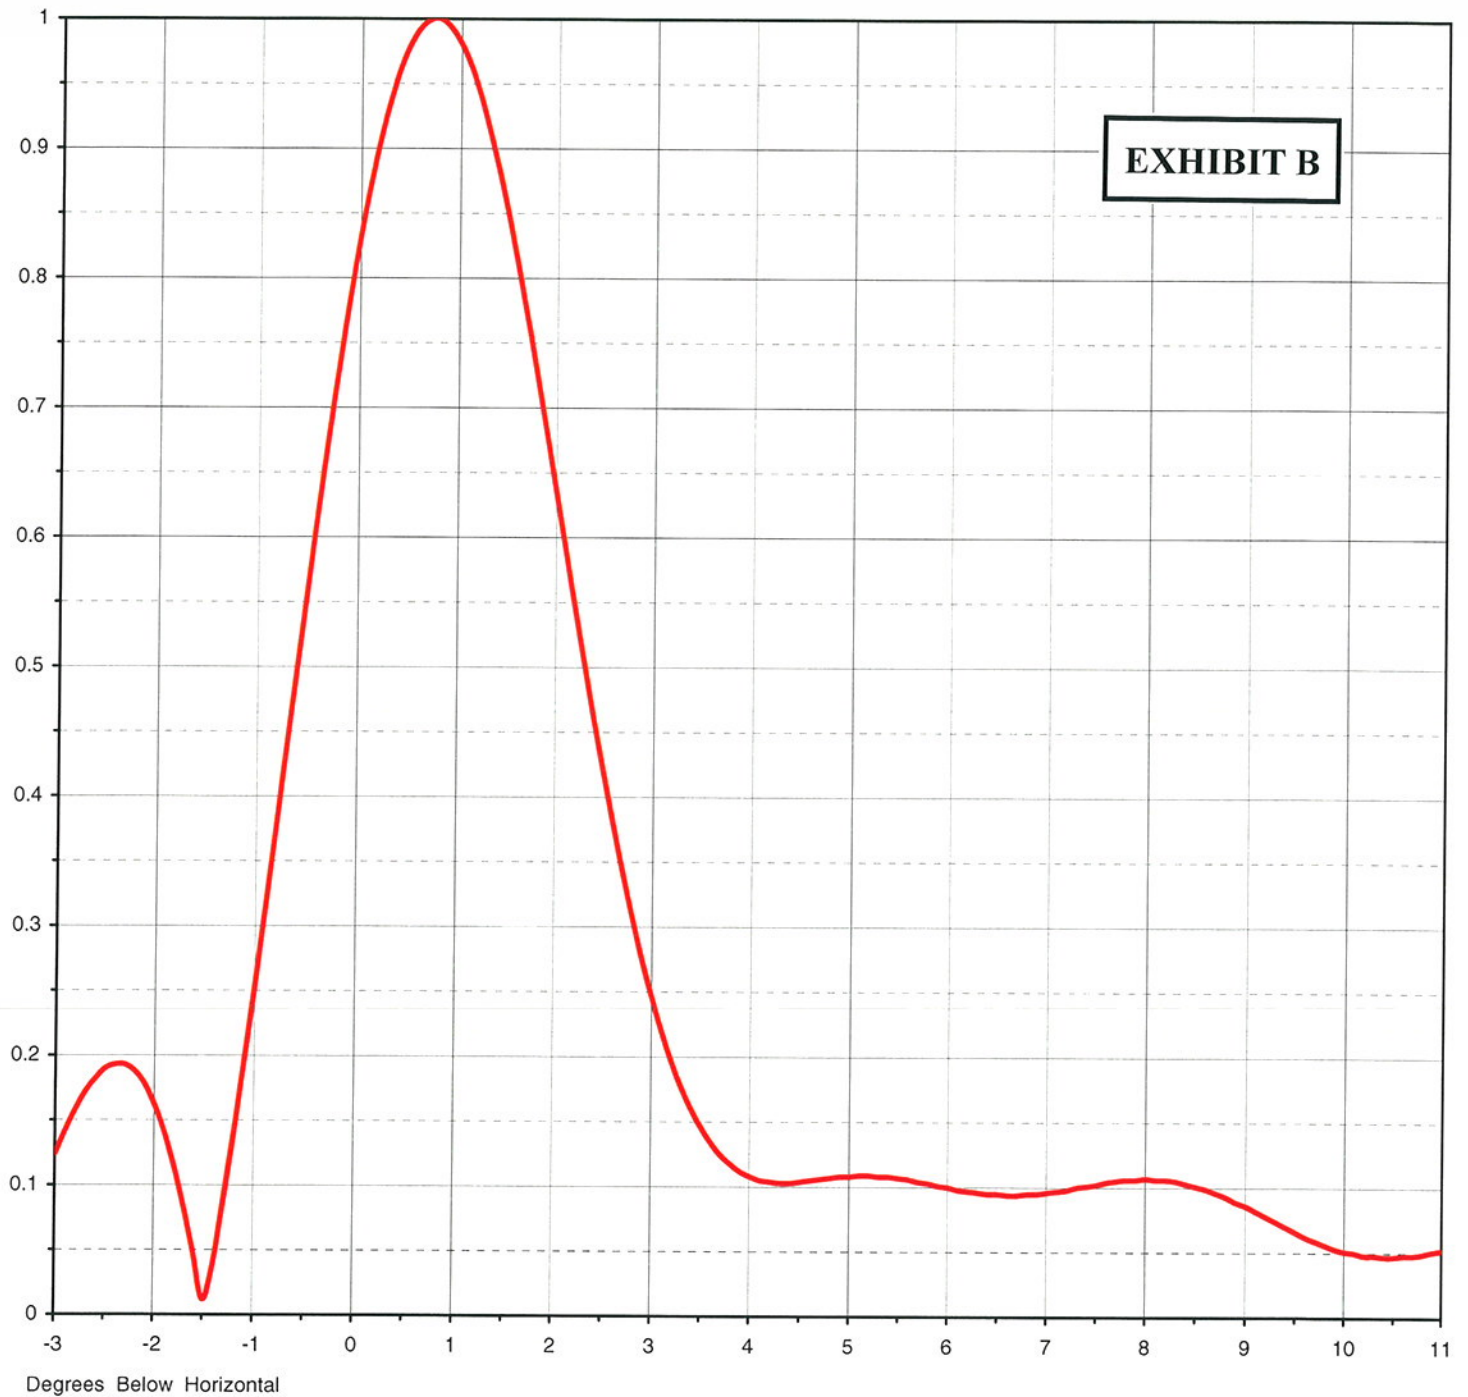

Proposal Number	DCA-8008	Revision:	1
Date	10-Aug-98		
Call Letters	KSBI	Channel	52/DT51
Location	Oklahoma City, OK		
Customer			
Antenna Type	TFU-30GBH-R 06 DC		

ELEVATION PATTERN

RMS Gain at Main Lobe	26.0 (14.15 dB)	Beam Tilt	0.75 deg
RMS Gain at Horizontal	18.0 (12.55 dB)	Frequency	701.00 MHz
Calculated / Measured	Calculated	Drawing #	30G27007-90

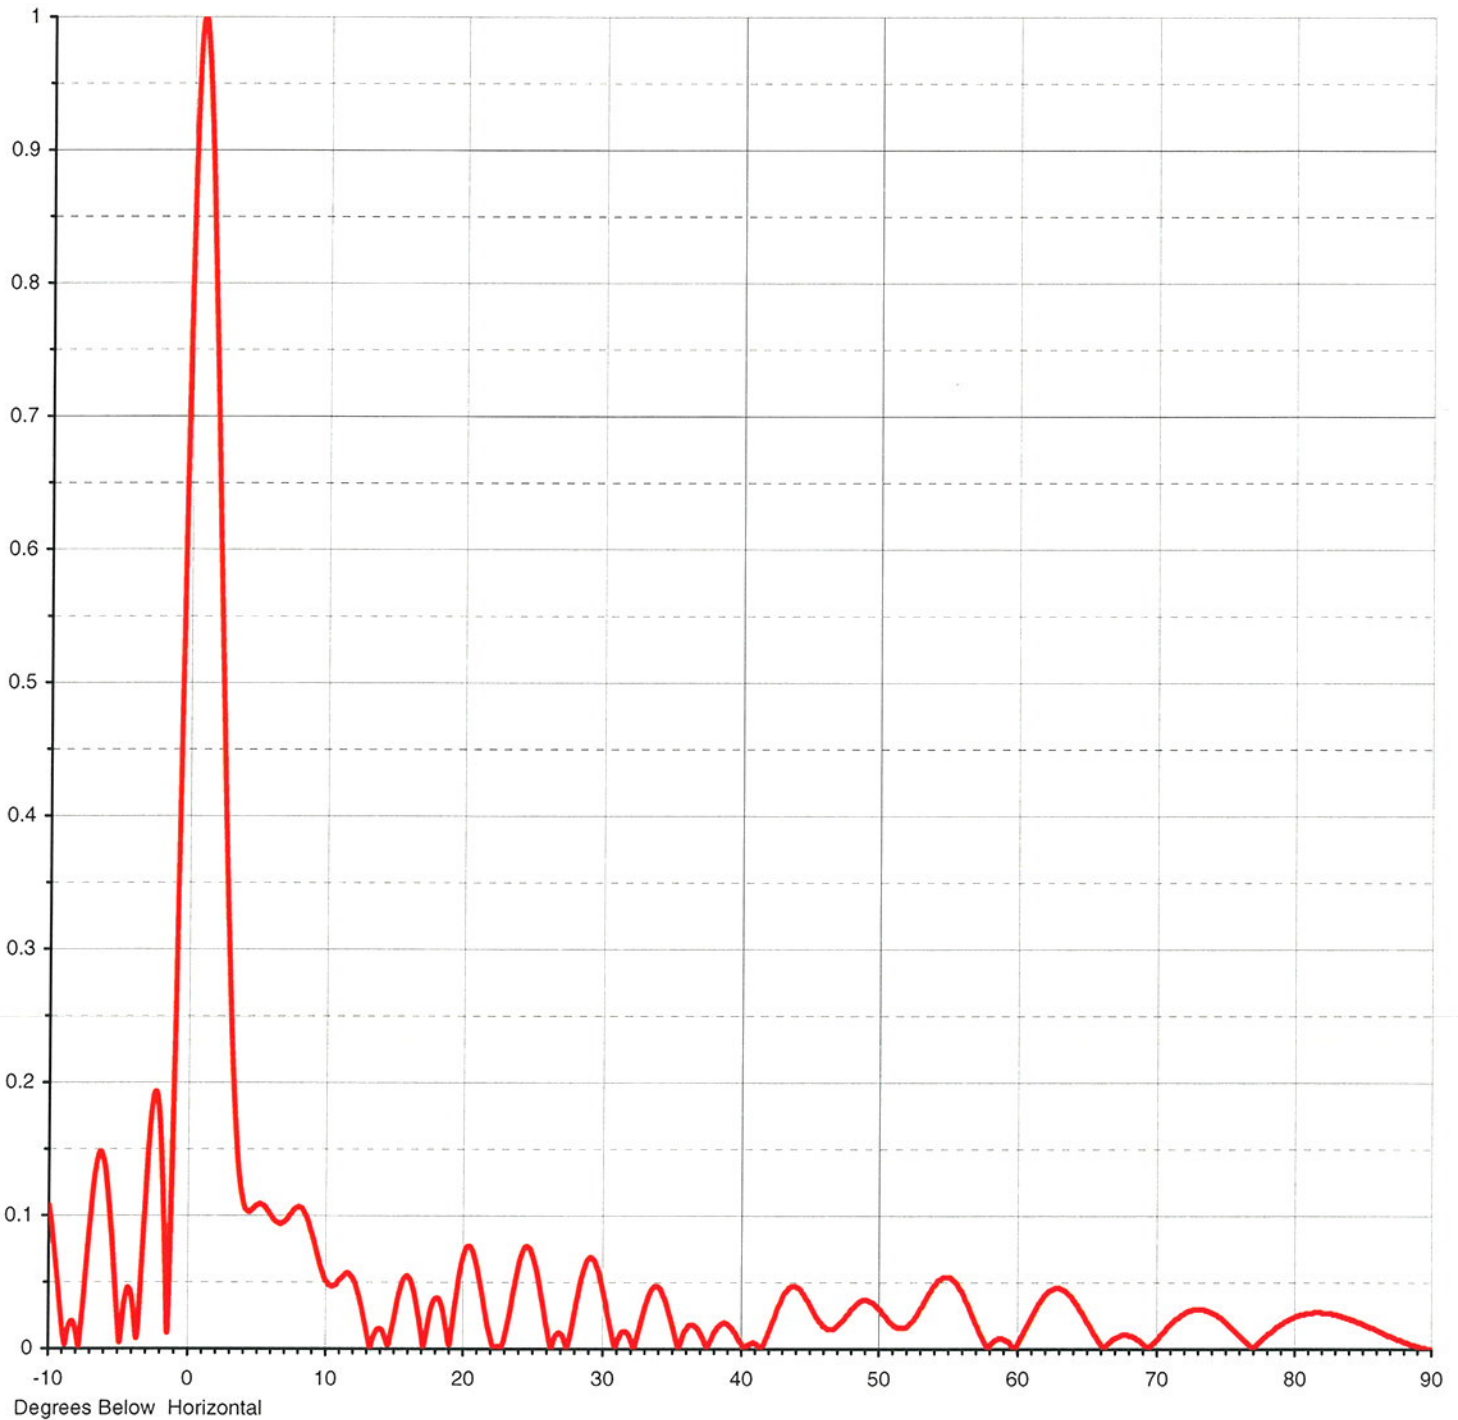

Proposal Number **DCA-8008** Revision: **1**
 Date **10-Aug-98**
 Call Letters **KSBI** Channel **52/DT51**
 Location **Oklahoma City, OK**
 Customer
 Antenna Type **TFU-30GBH-R O6 DC**

TABULATION OF ELEVATION PATTERN

Elevation Pattern Drawing #: **30G27007-90**

Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field
-10.0	0.108	2.4	0.458	10.6	0.047	30.5	0.022	51.0	0.019	71.5	0.023
-9.5	0.066	2.6	0.378	10.8	0.048	31.0	0.002	51.5	0.016	72.0	0.027
-9.0	0.015	2.8	0.307	11.0	0.051	31.5	0.013	52.0	0.016	72.5	0.029
-8.5	0.018	3.0	0.247	11.5	0.056	32.0	0.009	52.5	0.021	73.0	0.030
-8.0	0.012	3.2	0.198	12.0	0.054	32.5	0.008	53.0	0.029	73.5	0.029
-7.5	0.033	3.4	0.161	12.5	0.040	33.0	0.028	53.5	0.038	74.0	0.027
-7.0	0.096	3.6	0.135	13.0	0.016	33.5	0.043	54.0	0.047	74.5	0.024
-6.5	0.141	3.8	0.118	13.5	0.007	34.0	0.047	54.5	0.052	75.0	0.020
-6.0	0.141	4.0	0.108	14.0	0.015	34.5	0.038	55.0	0.054	75.5	0.015
-5.5	0.091	4.2	0.104	14.5	0.006	35.0	0.020	55.5	0.051	76.0	0.010
-5.0	0.017	4.4	0.103	15.0	0.019	35.5	0.001	56.0	0.044	76.5	0.005
-4.5	0.038	4.6	0.105	15.5	0.044	36.0	0.014	56.5	0.033	77.0	0.001
-4.0	0.037	4.8	0.107	16.0	0.055	36.5	0.018	57.0	0.020	77.5	0.006
-3.5	0.029	5.0	0.108	16.5	0.044	37.0	0.013	57.5	0.009	78.0	0.011
-3.0	0.124	5.2	0.109	17.0	0.015	37.5	0.002	58.0	0.001	78.5	0.015
-2.8	0.158	5.4	0.108	17.5	0.017	38.0	0.011	58.5	0.007	79.0	0.019
-2.6	0.182	5.6	0.106	18.0	0.037	38.5	0.018	59.0	0.008	79.5	0.022
-2.4	0.193	5.8	0.103	18.5	0.033	39.0	0.019	59.5	0.005	80.0	0.024
-2.2	0.188	6.0	0.100	19.0	0.005	39.5	0.013	60.0	0.002	80.5	0.026
-2.0	0.162	6.2	0.097	19.5	0.034	40.0	0.005	60.5	0.012	81.0	0.027
-1.8	0.116	6.4	0.095	20.0	0.066	40.5	0.003	61.0	0.022	81.5	0.028
-1.6	0.050	6.6	0.094	20.5	0.077	41.0	0.004	61.5	0.032	82.0	0.027
-1.4	0.038	6.8	0.095	21.0	0.065	41.5	0.001	62.0	0.040	82.5	0.027
-1.2	0.140	7.0	0.096	21.5	0.038	42.0	0.012	62.5	0.044	83.0	0.026
-1.0	0.255	7.2	0.098	22.0	0.011	42.5	0.025	63.0	0.046	83.5	0.024
-0.8	0.378	7.4	0.101	22.5	0.002	43.0	0.038	63.5	0.044	84.0	0.023
-0.6	0.503	7.6	0.104	23.0	0.006	43.5	0.046	64.0	0.039	84.5	0.021
-0.4	0.624	7.8	0.106	23.5	0.031	44.0	0.047	64.5	0.029	85.0	0.019
-0.2	0.735	8.0	0.107	24.0	0.059	44.5	0.042	65.0	0.020	85.5	0.016
0.0	0.832	8.2	0.106	24.5	0.076	45.0	0.034	65.5	0.011	86.0	0.014
0.2	0.909	8.4	0.103	25.0	0.072	45.5	0.024	66.0	0.003	86.5	0.012
0.4	0.964	8.6	0.099	25.5	0.051	46.0	0.017	66.5	0.004	87.0	0.010
0.6	0.994	8.8	0.093	26.0	0.020	46.5	0.015	67.0	0.008	87.5	0.007
0.8	1.000	9.0	0.086	26.5	0.004	47.0	0.017	67.5	0.011	88.0	0.005
1.0	0.981	9.2	0.078	27.0	0.012	47.5	0.022	68.0	0.010	88.5	0.003
1.2	0.941	9.4	0.070	27.5	0.001	48.0	0.029	68.5	0.008	89.0	0.002
1.4	0.882	9.6	0.062	28.0	0.024	48.5	0.034	69.0	0.004	89.5	0.001
1.6	0.808	9.8	0.059	28.5	0.051	49.0	0.037	69.5	0.002	90.0	0.000
1.8	0.724	10.0	0.053	29.0	0.067	49.5	0.035	70.0	0.007		
2.0	0.635	10.2	0.050	29.5	0.066	50.0	0.031	70.5	0.013		
2.2	0.545	10.4	0.048	30.0	0.048	50.5	0.025	71.0	0.019		