

EXHIBIT 7
(Page 1 of 6)


NONIONIZING RADIATION COMPLIANCE
Digital TV of Orlando, LLC
Orlando, FL

The proposed modified WHDO-CA facilities will fully comply with the current FCC Standard with regard to human exposure to nonionizing radiation. These facilities will operate with a maximum peak visual effective radiated power of 108 kilowatts and a maximum aural effective radiated power of 10.8 kilowatts using an SWR SWEDM 16WLS/38N-42D directional antenna which will be shared with paired digital companion channel WHDO-LD. This antenna will be installed with its center of radiation located 135 meters above ground level on a 140.2 meter tower. This tower also supports the antennas for a number of non-broadcast radio facilities.

Table 7.0 and Figure 7.0 present the vertical radiation pattern for the proposed antenna, which was supplied by the manufacturer. Equation (2), found on Page 30 of Supplement A to FCC OET Bulletin No. 65, details the calculation technique for determining the power density levels at the base of a TV broadcast tower. Using this vertical radiation pattern in conjunction with this equation yields a predicted worst case maximum power density of $1.52 \mu\text{W}/\text{cm}^2$ at two meters above ground level, which will occur at a depression angle of 83° . Since the permitted power density for uncontrolled exposure on Channel 38 is $409.3 \mu\text{W}/\text{cm}^2$, this amounts to only 0.37% of the permitted level for uncontrolled exposure. Since this value is less than 5% of the permitted level, the proposed modified WHDO-CA facilities are excluded from environmental processing under this standard and need not be considered in conjunction with other co-located or nearby facilities in evaluating compliance with this standard.

EXHIBIT 7
(Page 2 of 6)

WHDO-CA, in conjunction with the other co-located facilities, will take appropriate steps to insure that workers that must be on this tower will not be exposed to levels of nonionizing radiation that are in excess of the permitted level for controlled exposure. These steps will include the cessation of operation or a reduction in power, as appropriate, by one or more of these stations, when work becomes necessary in areas on this tower where the total power density levels are in excess of the permitted level for controlled exposure.

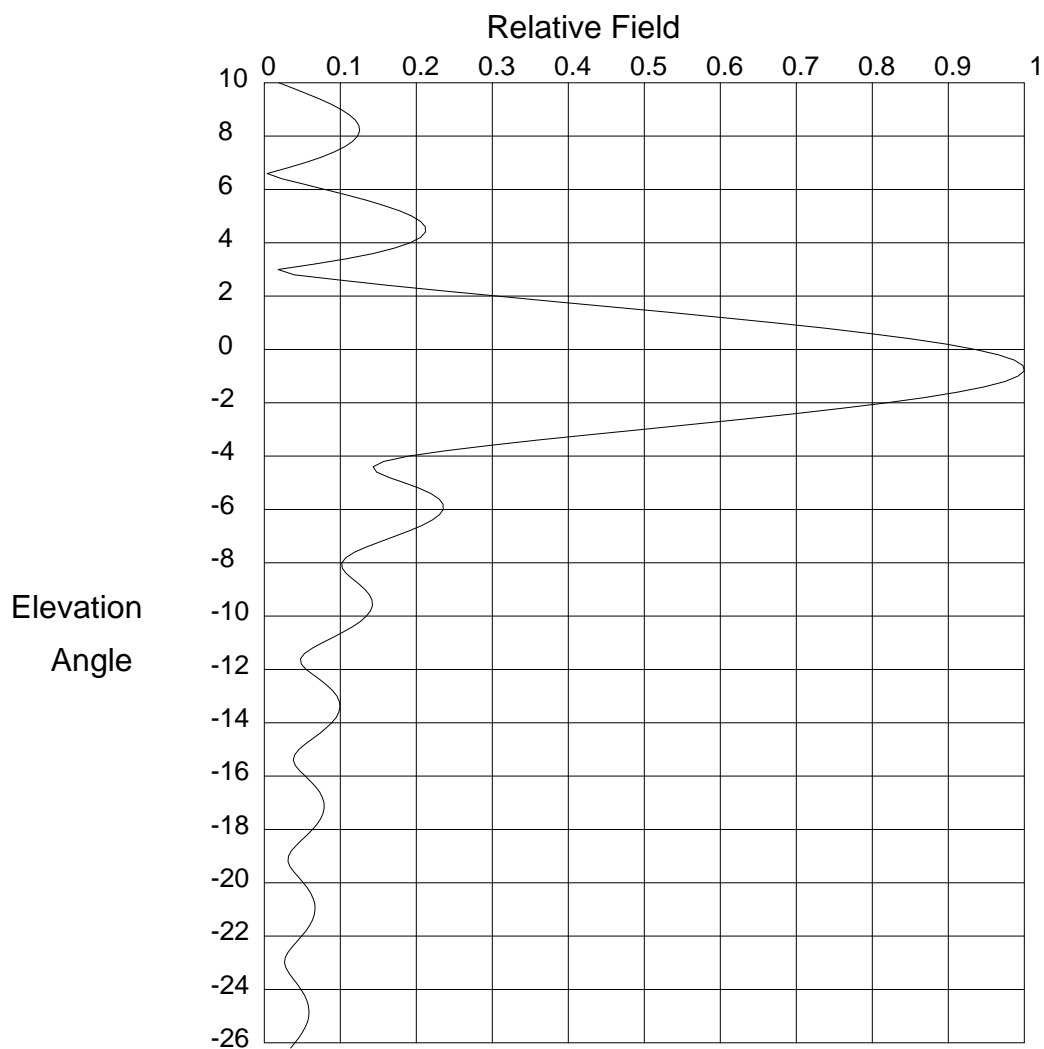

Elevation Pattern

Scale: Linear

Units: Field, Relative

Systems With Reliability Inc

CLIENT: *WHDO*

Date: 8/4/2008

ANTENNA TYPE: SWEDL16WLS / 38N-42D (CH 38)

FREQUENCY: 617 MHz

PATTERN POL.: Horizontal

DIRECTIVITY(Peak): 17.118/12.334 dBd

Beam Tilt (Deg.) : -75

DIRECTIVITY(Horiz): 14.993/11.759 dBd

Null Fill(s)(%) : 15, 10, 5

Micro-Tek Eng. Ver. 2.5

FIGURE 7.0

VERTICAL RADIATION PATTERN

Relative Field Tabulation

Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)
90.0	.095 (-20.411)	52.0	.078 (-22.185)	14.0	.006 (-44.088)
89.0	.11 (-19.151)	51.0	.083 (-21.583)	13.0	.06 (-24.478)
88.0	.125 (-18.051)	50.0	.07 (-23.039)	12.0	.092 (-20.731)
87.0	.14 (-17.084)	49.0	.045 (-26.956)	11.0	.062 (-24.154)
86.0	.154 (-16.228)	48.0	.033 (-29.717)	10.0	.019 (-34.328)
85.0	.168 (-15.472)	47.0	.054 (-25.413)	9.8	.038 (-28.518)
84.0	.182 (-14.812)	46.0	.071 (-22.99)	9.6	.055 (-25.131)
83.0	.194 (-14.246)	45.0	.069 (-23.245)	9.4	.072 (-22.817)
82.0	.205 (-13.78)	44.0	.048 (-26.333)	9.2	.088 (-21.141)
81.0	.213 (-13.422)	43.0	.029 (-30.611)	9.0	.101 (-19.909)
80.0	.219 (-13.184)	42.0	.047 (-26.612)	8.8	.112 (-19.023)
79.0	.222 (-13.082)	41.0	.065 (-23.685)	8.6	.12 (-18.429)
78.0	.22 (-13.138)	40.0	.064 (-23.916)	8.4	.124 (-18.1)
77.0	.214 (-13.375)	39.0	.042 (-27.49)	8.2	.126 (-18.026)
76.0	.204 (-13.824)	38.0	.029 (-30.856)	8.0	.123 (-18.214)
75.0	.188 (-14.514)	37.0	.051 (-25.849)	7.8	.116 (-18.691)
74.0	.168 (-15.469)	36.0	.065 (-23.678)	7.6	.106 (-19.505)
73.0	.147 (-16.674)	35.0	.056 (-24.994)	7.4	.092 (-20.751)
72.0	.126 (-17.99)	34.0	.033 (-29.709)	7.2	.074 (-22.607)
71.0	.112 (-19.018)	33.0	.038 (-28.467)	7.0	.053 (-25.475)
70.0	.11 (-19.196)	32.0	.058 (-24.68)	6.8	.03 (-30.551)
69.0	.119 (-18.478)	31.0	.057 (-24.906)	6.6	.004 (-47.969)
68.0	.134 (-17.45)	30.0	.029 (-30.702)	6.4	.023 (-32.592)
67.0	.147 (-16.637)	29.0	.015 (-36.727)	6.2	.052 (-25.734)
66.0	.153 (-16.292)	28.0	.046 (-26.697)	6.0	.08 (-21.938)
65.0	.149 (-16.547)	27.0	.052 (-25.648)	5.8	.108 (-19.361)
64.0	.133 (-17.509)	26.0	.028 (-31.204)	5.6	.134 (-17.476)
63.0	.109 (-19.287)	25.0	.015 (-36.447)	5.4	.157 (-16.059)
62.0	.081 (-21.781)	24.0	.049 (-26.156)	5.2	.178 (-14.997)
61.0	.066 (-23.607)	23.0	.055 (-25.241)	5.0	.194 (-14.23)
60.0	.074 (-22.618)	22.0	.026 (-31.663)	4.8	.206 (-13.725)
59.0	.092 (-20.697)	21.0	.021 (-33.732)	4.6	.212 (-13.47)
58.0	.104 (-19.649)	20.0	.057 (-24.952)	4.4	.212 (-13.468)
57.0	.102 (-19.842)	19.0	.057 (-24.81)	4.2	.206 (-13.74)
56.0	.085 (-21.457)	18.0	.02 (-34.033)	4.0	.192 (-14.33)
55.0	.059 (-24.656)	17.0	.035 (-29.233)	3.8	.171 (-15.32)
54.0	.043 (-27.234)	16.0	.07 (-23.084)	3.6	.143 (-16.869)
53.0	.058 (-24.699)	15.0	.06 (-24.409)	3.4	.108 (-19.316)

Systems With Reliability Inc

Page 1 of 3

CLIENT: WHDO

Date: 8/4/2008

ANTENNA TYPE: SWEDL16WLS / 38N-42D (CH 38)

FREQUENCY: 617 MHz

PATTERN POL.: Horizontal

DIRECTIVITY(Peak): 17.118/12.334 dBd

Beam Tilt (Deg.) : -.75

DIRECTIVITY(Horiz): 14.993/11.759 dBd

Null Fill(s)(%) : 15, 10, 5

Micro-Tek Eng. Ver. 2.5

TABLE 7.0

VERTICAL RADIATION PATTERN

Relative Field Tabulation

Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)
3.2	.066 (-23.605)	-4.4	.143 (-16.883)	-12.0	.055 (-25.142)
3.0	.018 (-34.818)	-4.6	.148 (-16.595)	-12.2	.064 (-23.82)
2.8	.039 (-28.112)	-4.8	.164 (-15.686)	-12.4	.074 (-22.609)
2.6	.10 (-20.032)	-5.0	.185 (-14.68)	-12.6	.083 (-21.625)
2.4	.165 (-15.647)	-5.2	.204 (-13.822)	-12.8	.09 (-20.887)
2.2	.234 (-12.601)	-5.4	.219 (-13.183)	-13.0	.096 (-20.384)
2.0	.307 (-10.268)	-5.6	.23 (-12.767)	-13.2	.099 (-20.101)
1.8	.381 (-8.389)	-5.8	.235 (-12.565)	-13.4	.10 (-20.027)
1.6	.455 (-6.833)	-6.0	.235 (-12.562)	-13.6	.098 (-20.156)
1.4	.529 (-5.523)	-6.2	.23 (-12.748)	-13.8	.095 (-20.487)
1.2	.602 (-4.41)	-6.4	.221 (-13.115)	-14.0	.089 (-21.024)
1.0	.671 (-3.462)	-6.6	.207 (-13.66)	-14.2	.082 (-21.775)
.8	.737 (-2.656)	-6.8	.191 (-14.378)	-14.4	.073 (-22.749)
.6	.797 (-1.974)	-7.0	.173 (-15.26)	-14.6	.063 (-23.948)
.4	.851 (-1.406)	-7.2	.153 (-16.283)	-14.8	.054 (-25.339)
.2	.897 (-0.942)	-7.4	.135 (-17.396)	-15.0	.046 (-26.789)
.0	.936 (-0.575)	-7.6	.119 (-18.486)	-15.2	.04 (-27.954)
-.2	.966 (-0.301)	-7.8	.108 (-19.367)	-15.4	.038 (-28.329)
-.4	.987 (-0.115)	-8.0	.102 (-19.827)	-15.6	.041 (-27.744)
-.6	.998 (-0.015)	-8.2	.103 (-19.775)	-15.8	.047 (-26.605)
-.8	1.00 (0)	-8.4	.108 (-19.328)	-16.0	.054 (-25.375)
-1.0	.992 (-0.069)	-8.6	.116 (-18.702)	-16.2	.061 (-24.285)
-1.2	.975 (-0.224)	-8.8	.125 (-18.075)	-16.4	.068 (-23.407)
-1.4	.948 (-0.464)	-9.0	.133 (-17.548)	-16.6	.073 (-22.754)
-1.6	.913 (-0.794)	-9.2	.139 (-17.171)	-16.8	.077 (-22.318)
-1.8	.869 (-1.215)	-9.4	.142 (-16.963)	-17.0	.079 (-22.088)
-2.0	.819 (-1.734)	-9.6	.142 (-16.933)	-17.2	.079 (-22.057)
-2.2	.762 (-2.356)	-9.8	.14 (-17.085)	-17.4	.077 (-22.222)
-2.4	.701 (-3.09)	-10.0	.134 (-17.426)	-17.6	.074 (-22.584)
-2.6	.635 (-3.945)	-10.2	.126 (-17.964)	-17.8	.07 (-23.15)
-2.8	.567 (-4.935)	-10.4	.116 (-18.711)	-18.0	.064 (-23.929)
-3.0	.497 (-6.075)	-10.6	.104 (-19.683)	-18.2	.057 (-24.93)
-3.2	.427 (-7.384)	-10.8	.09 (-20.895)	-18.4	.049 (-26.151)
-3.4	.36 (-8.883)	-11.0	.076 (-22.346)	-18.6	.042 (-27.546)
-3.6	.296 (-10.584)	-11.2	.063 (-23.968)	-18.8	.036 (-28.949)
-3.8	.238 (-12.47)	-11.4	.053 (-25.511)	-19.0	.032 (-29.966)
-4.0	.19 (-14.421)	-11.6	.048 (-26.424)	-19.2	.031 (-30.107)
-4.2	.157 (-16.084)	-11.8	.049 (-26.215)	-19.4	.034 (-29.332)

Systems With Reliability Inc

Page 2 of 3

CLIENT: WHDO

Date: 8/4/2008

ANTENNA TYPE: SWEDL16WLS / 38N-42D (CH 38)

FREQUENCY: 617 MHz

PATTERN POL.: Horizontal

DIRECTIVITY(Peak): 17.118/12.334 dBd

Beam Tilt (Deg.) : -.75

DIRECTIVITY(Horiz): 14.993/11.759 dBd

Null Fill(s)(%) : 15, 10, 5

Micro-Tek Eng. Ver. 2.5

TABLE 7.0

VERTICAL RADIATION PATTERN

Relative Field Tabulation

Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)
-19.6	.039 (-28.107)	-27.2	.026 (-31.819)	-54.0	.068 (-23.344)
-19.8	.045 (-26.854)	-27.4	.03 (-30.402)	-55.0	.049 (-26.18)
-20.0	.052 (-25.762)	-27.6	.035 (-29.038)	-56.0	.019 (-34.463)
-20.2	.057 (-24.886)	-27.8	.04 (-27.876)	-57.0	.021 (-33.726)
-20.4	.061 (-24.231)	-28.0	.045 (-26.946)	-58.0	.053 (-25.572)
-20.6	.065 (-23.786)	-28.2	.049 (-26.24)	-59.0	.076 (-22.393)
-20.8	.067 (-23.541)	-28.4	.052 (-25.746)	-60.0	.086 (-21.354)
-21.0	.067 (-23.489)	-28.6	.053 (-25.451)	-61.0	.08 (-21.917)
-21.2	.066 (-23.626)	-28.8	.054 (-25.349)	-62.0	.061 (-24.26)
-21.4	.063 (-23.954)	-29.0	.053 (-25.437)	-63.0	.032 (-29.823)
-21.6	.06 (-24.478)	-29.2	.052 (-25.723)	-64.0	.007 (-42.79)
-21.8	.055 (-25.208)	-29.4	.049 (-26.221)	-65.0	.039 (-28.078)
-22.0	.049 (-26.153)	-29.6	.045 (-26.957)	-66.0	.071 (-22.947)
-22.2	.043 (-27.314)	-29.8	.04 (-27.975)	-67.0	.096 (-20.337)
-22.4	.037 (-28.657)	-30.0	.034 (-29.349)	-68.0	.112 (-19.002)
-22.6	.031 (-30.05)	-31.0	.007 (-42.857)	-69.0	.118 (-18.531)
-22.8	.028 (-31.154)	-32.0	.041 (-27.7)	-70.0	.115 (-18.756)
-23.0	.027 (-31.479)	-33.0	.058 (-24.801)	-71.0	.105 (-19.614)
-23.2	.029 (-30.856)	-34.0	.046 (-26.723)	-72.0	.088 (-21.096)
-23.4	.033 (-29.679)	-35.0	.013 (-37.677)	-73.0	.069 (-23.178)
-23.6	.038 (-28.401)	-36.0	.027 (-31.484)	-74.0	.053 (-25.522)
-23.8	.043 (-27.251)	-37.0	.053 (-25.439)	-75.0	.046 (-26.697)
-24.0	.048 (-26.305)	-38.0	.056 (-24.977)	-76.0	.053 (-25.489)
-24.2	.053 (-25.575)	-39.0	.035 (-29.197)	-77.0	.068 (-23.385)
-24.4	.056 (-25.053)	-40.0	.003 (-50.906)	-78.0	.084 (-21.558)
-24.6	.058 (-24.729)	-41.0	.038 (-28.464)	-79.0	.098 (-20.198)
-24.8	.059 (-24.594)	-42.0	.058 (-24.677)	-80.0	.109 (-19.25)
-25.0	.059 (-24.645)	-43.0	.056 (-25.013)	-81.0	.117 (-18.637)
-25.2	.057 (-24.882)	-44.0	.033 (-29.762)	-82.0	.122 (-18.3)
-25.4	.054 (-25.309)	-45.0	.005 (-46.48)	-83.0	.123 (-18.196)
-25.6	.05 (-25.938)	-46.0	.039 (-28.21)	-84.0	.122 (-18.294)
-25.8	.046 (-26.781)	-47.0	.061 (-24.289)	-85.0	.118 (-18.577)
-26.0	.04 (-27.853)	-48.0	.063 (-23.979)	-86.0	.112 (-19.033)
-26.2	.035 (-29.155)	-49.0	.045 (-26.882)	-87.0	.104 (-19.662)
-26.4	.029 (-30.633)	-50.0	.013 (-37.51)	-88.0	.095 (-20.47)
-26.6	.025 (-32.081)	-51.0	.024 (-32.505)	-89.0	.084 (-21.475)
-26.8	.022 (-33.01)	-52.0	.054 (-25.361)	-90.0	.073 (-22.709)
-27.0	.023 (-32.885)	-53.0	.07 (-23.096)	90.0	.00 (-50)

Systems With Reliability Inc

Page 3 of 3

CLIENT: WHDO

Date: 8/4/2008

ANTENNA TYPE: SWEDL16WLS / 38N-42D (CH 38)

FREQUENCY: 617 MHz

PATTERN POL.: Horizontal

DIRECTIVITY(Peak): 17.118/12.334 dBd

Beam Tilt (Deg.) : -.75

DIRECTIVITY(Horiz): 14.993/11.759 dBd

Null Fill(s)(%) : 15, 10, 5

Micro-Tek Eng. Ver. 2.5

TABLE 7.0

VERTICAL RADIATION PATTERN