


Measured Pattern Envelope at 2.9 kW

- Relative Field -

North
0°

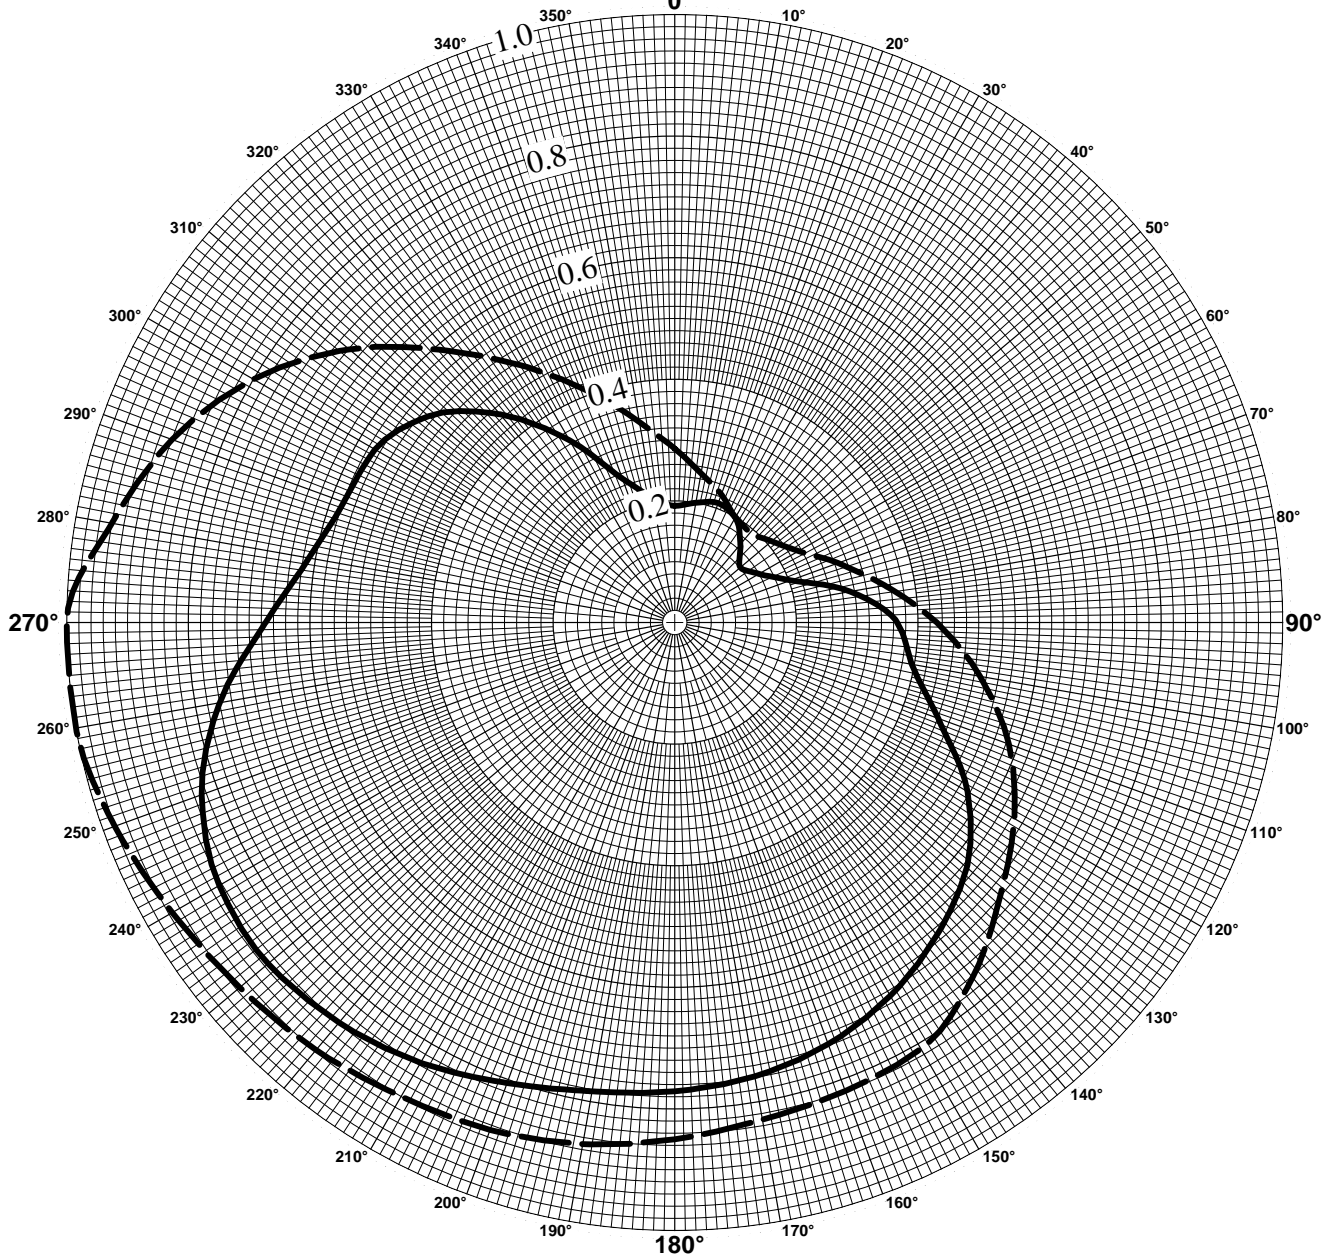

———— Measured Pattern Envelope - Relative Field Scaled to 2.9 kW

- - - - Permitted Pattern Envelope at 3.8 kW

Effective relative field for measured pattern envelope at 2.9 kW.

0°T	0.192	10°T	0.200	20°T	0.209	30°T	0.199	40°T	0.168	50°T	0.141
60°T	0.160	70°T	0.203	80°T	0.293	90°T	0.366	100°T	0.396	110°T	0.461
120°T	0.556	130°T	0.627	140°T	0.671	150°T	0.709	160°T	0.738	170°T	0.758
180°T	0.771	190°T	0.783	200°T	0.806	210°T	0.836	220°T	0.859	230°T	0.873
240°T	0.865	250°T	0.828	260°T	0.760	270°T	0.673	280°T	0.611	290°T	0.579
300°T	0.569	310°T	0.528	320°T	0.447	330°T	0.346	340°T	0.252	350°T	0.209
232°T	0.874										

