

DELAWDER COMMUNICATIONS, INC.

P.O. Box 1095
Ashburn, Virginia 20146-1095
(703) 299-9222

ENGINEERING REPORT

K210DF, to Angleton, TX, Channel 207D Minor Amendment

ENGINEERING STATEMENT

PROTECTION TO KUHF

All contour non-overlap protection requirements are met with the exception of KUHF, Houston, TX (204C), discussed below.

KUHF (40.3 kilometers at 352 degrees True) is third adjacent-channel to the proposed channel 207D facility. The 60 dBu F50,50 service contour of KUHF extends well beyond the proposed 207D transmitter site. Using the well-established *Living Way Ministries* Methodology, no actual interference to any population is predicted to exist to KUHF.

Note that a rule waiver of Section 74.1204 for this second/third adjacent-channel protection using the well-established *Living Way Ministries* Methodology is respectfully requested if such a rule waiver is deemed necessary for protection to any station.

The F50,50 signal strength from KUHF at the proposed 207D transmitter site is at least 80 dBu (the "desired" signal). The second/third adjacent-channel protection of Section 74.1204 is an undesired-to-desired ("U/D") dB signal strength ratio of 40:1. Therefore, predicted interference to KUHF from the proposed 207D facility is a signal of greater than or equal to 120 dBu.

Figure EE1 is the vertical plane relative field pattern for the proposed Nicom BKG-77 two-bay (halfwave spaced) antenna. By adjusting for the vertical plane downward relative field values of the proposed antenna, it is herein demonstrated that the 120 dBu interfering signal (using a free space field determination) does not exist at any point at ground level. (Actually, the study is made to 2 meters above ground level to account for a person's height.)

Attached as Figure EE2 is a tabulation of various points (at 2 meters above ground level) from the proposed translator tower base. (Column B is the different distances from the tower base to each studied point.) The actual distance from the antenna to each point is listed in Column C, the hypotenuse of the vertical height


(Column A) and the horizontal distance (Column B). Also, the vertical distance from the antenna bottom to the calculated interference signal for each studied point is provided in Column K. Because the calculated distance to the free space interfering signal (Column J) is less than the hypotenuse distance (Column C) and the interfering signal vertical distance (Column K) is less than the vertical distance (Column A) for each studied point, the interfering signal does not reach any studied point. (In other words, the interfering signal does not make it to 2 meters any point.) The clearance is at least 45 meters. Therefore, pursuant to Section 74.1204(d) of the FCC Rules, KUHF is adequately protected by the proposed facility.

TX station: BKG77/2 GENERIC
Frequency: 98.10 MHz

Site name: 1/2 WAVE SEPARATION

FIGURE EE1 (1 of 2)

Vertical diagram

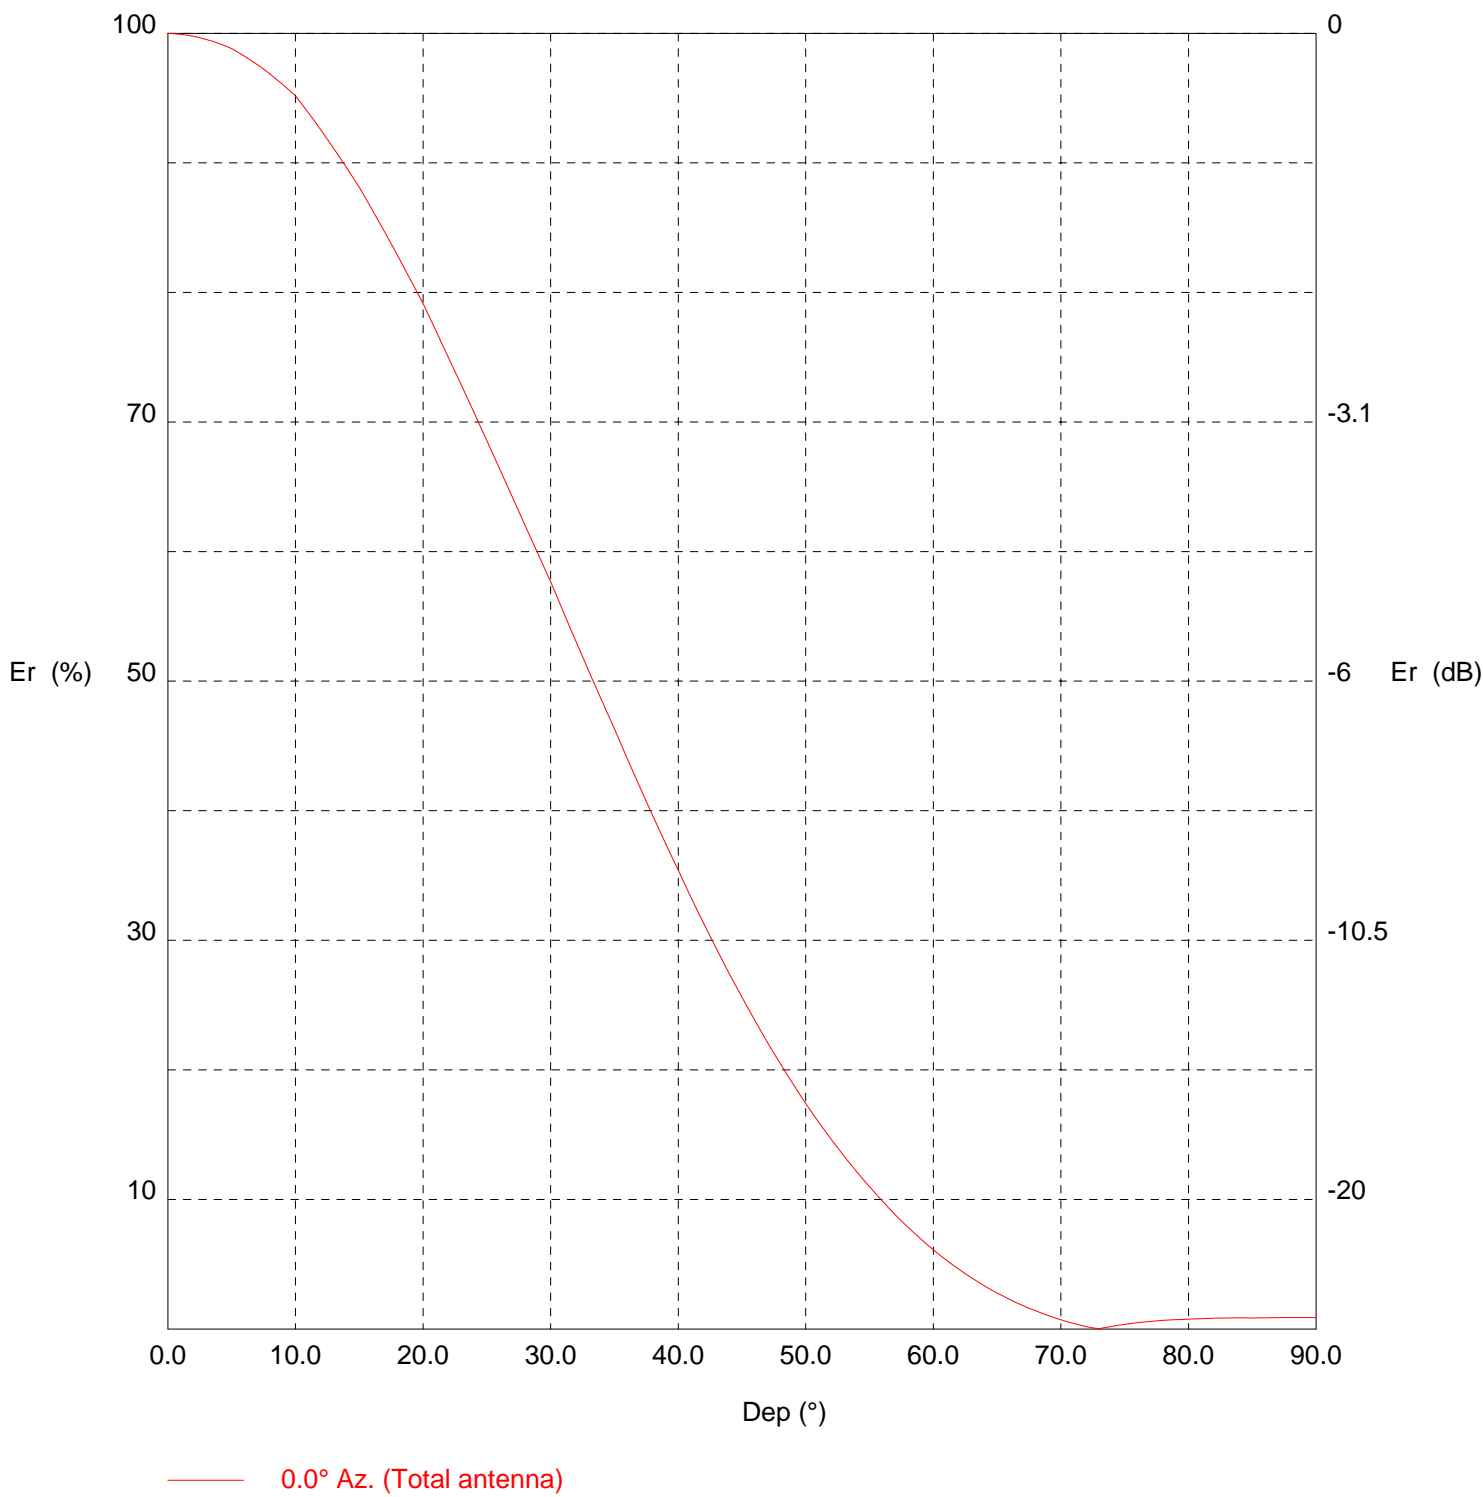

TX station: BKG77/2 GENERIC

Site name: 1/2 WAVE SEPARATION

Frequency: 98.10 MHz

FIGURE EE1 (2 of 2)

Vertical diagram at an azimuth of 0° degrees

Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)
0.0	100.0	914.2	30.0	57.7	304.2	60.0	6.1	3.4
0.5	100.0	913.7	30.5	56.5	292.0	60.5	5.7	3.0
1.0	99.9	912.9	31.0	55.3	280.1	61.0	5.3	2.6
1.5	99.9	911.6	31.5	54.2	268.5	61.5	5.0	2.3
2.0	99.8	910.0	32.0	53.0	257.2	62.0	4.6	1.9
2.5	99.7	908.1	32.5	51.9	246.3	62.5	4.3	1.7
3.0	99.5	905.7	33.0	50.8	235.6	63.0	3.9	1.4
3.5	99.4	903.0	33.5	49.6	225.3	63.5	3.6	1.2
4.0	99.2	899.9	34.0	48.5	215.3	64.0	3.3	1.0
4.5	99.0	896.5	34.5	47.4	205.5	64.5	3.1	0.9
5.0	98.8	892.7	35.0	46.3	196.1	65.0	2.8	0.7
5.5	98.5	887.7	35.5	45.2	186.5	65.5	2.5	0.6
6.0	98.2	882.4	36.0	44.0	177.3	66.0	2.3	0.5
6.5	97.9	876.7	36.5	42.9	168.4	66.5	2.0	0.4
7.0	97.6	870.7	37.0	41.8	159.8	67.0	1.8	0.3
7.5	97.2	864.3	37.5	40.7	151.5	67.5	1.6	0.2
8.0	96.9	857.7	38.0	39.6	143.5	68.0	1.4	0.2
8.5	96.5	850.8	38.5	38.5	135.8	68.5	1.2	0.1
9.0	96.1	843.5	39.0	37.5	128.5	69.0	1.0	0.1
9.5	95.6	836.0	39.5	36.4	121.4	69.5	0.9	0.1
10.0	95.2	828.2	40.0	35.4	114.6	70.0	0.7	0.0
10.5	94.5	817.1	40.5	34.4	107.9	70.5	0.6	0.0
11.0	93.9	805.8	41.0	33.3	101.5	71.0	0.4	0.0
11.5	93.2	794.4	41.5	32.3	95.4	71.5	0.3	0.0
12.0	92.5	782.7	42.0	31.3	89.5	72.0	0.2	0.0
12.5	91.8	770.9	42.5	30.3	84.0	72.5	0.1	0.0
13.0	91.1	759.0	43.0	29.3	78.7	73.0	0.0	0.0
13.5	90.4	746.9	43.5	28.4	73.6	73.5	0.1	0.0
14.0	89.6	734.6	44.0	27.4	68.8	74.0	0.2	0.0
14.5	88.9	722.3	44.5	26.5	64.3	74.5	0.3	0.0
15.0	88.1	709.8	45.0	25.6	59.9	75.0	0.4	0.0
15.5	87.3	696.2	45.5	24.7	55.8	75.5	0.4	0.0
16.0	86.4	682.5	46.0	23.8	51.9	76.0	0.5	0.0
16.5	85.5	668.7	46.5	23.0	48.2	76.5	0.5	0.0
17.0	84.6	655.0	47.0	22.1	44.7	77.0	0.6	0.0
17.5	83.8	641.2	47.5	21.3	41.5	77.5	0.6	0.0
18.0	82.8	627.4	48.0	20.5	38.4	78.0	0.7	0.0
18.5	81.9	613.7	48.5	19.7	35.4	78.5	0.7	0.0
19.0	81.0	599.9	49.0	18.9	32.7	79.0	0.7	0.0
19.5	80.1	586.2	49.5	18.2	30.1	79.5	0.7	0.1
20.0	79.1	572.5	50.0	17.4	27.7	80.0	0.8	0.1
20.5	78.1	557.6	50.5	16.7	25.5	80.5	0.8	0.1
21.0	77.1	542.9	51.0	16.0	23.4	81.0	0.8	0.1
21.5	76.0	528.2	51.5	15.3	21.4	81.5	0.8	0.1
22.0	75.0	513.7	52.0	14.6	19.6	82.0	0.8	0.1
22.5	73.9	499.3	52.5	14.0	17.9	82.5	0.8	0.1
23.0	72.8	485.1	53.0	13.3	16.3	83.0	0.8	0.1
23.5	71.8	471.1	53.5	12.7	14.8	83.5	0.9	0.1
24.0	70.7	457.2	54.0	12.1	13.4	84.0	0.9	0.1
24.5	69.6	443.5	54.5	11.5	12.2	84.5	0.9	0.1
25.0	68.6	429.9	55.0	11.0	11.0	85.0	0.8	0.1
25.5	67.5	416.4	55.5	10.4	9.9	85.5	0.9	0.1
26.0	66.4	403.0	56.0	9.9	8.9	86.0	0.9	0.1
26.5	65.3	389.8	56.5	9.3	8.0	86.5	0.9	0.1
27.0	64.2	376.9	57.0	8.8	7.1	87.0	0.9	0.1
27.5	63.1	364.2	57.5	8.3	6.4	87.5	0.9	0.1
28.0	62.0	351.7	58.0	7.9	5.6	88.0	0.9	0.1
28.5	60.9	339.4	58.5	7.4	5.0	88.5	0.9	0.1
29.0	59.8	327.4	59.0	7.0	4.4	89.0	0.9	0.1
29.5	58.8	315.7	59.5	6.5	3.9	89.5	0.9	0.1

FIGURE EE2

FREE SPACE FIELD STRENGTH AT A DISTANCE STUDY RESULTS

PROJECT: ANGLETON, TX, CHANNEL 207D

18-Aug-17

Pt	Column A Vert Dist From Ant Bottom (meters)	Column B Horiz Dist From Tower Base (meters)	Column C Hypot- enuse Dist fr Ant Bottom (meters)	Column D Down- ward Angle fr Ant Bottom (degrees)	Column E Max ERP (watts)	Column F Max ERP (dBmW)	Column G Pattern Relative Field at Down- ward Angle	Column H Free Space Inter- ferring Signal (dBu)	Column I Adjusted ERP in Down- ward Angle (dBmW)	Column J Interf Distance along Hypot- enuse (meters)	Column K Vert Interf Distance below Antenna (meters)
1	77	0.1	77.0	89.9	250	53.98	0.010	120.0	13.98	1.1	1.1
2	77	5	77.2	86.3	250	53.98	0.010	120.0	13.98	1.1	1.1
3	77	10	77.6	82.6	250	53.98	0.010	120.0	13.98	1.1	1.1
4	77	20	79.6	75.4	250	53.98	0.010	120.0	13.98	1.1	1.1
5	77	30	82.6	68.7	250	53.98	0.012	120.0	15.56	1.3	1.2
6	77	40	86.8	62.5	250	53.98	0.043	120.0	26.65	4.8	4.2
7	77	50	91.8	57.0	250	53.98	0.088	120.0	32.87	9.8	8.2
8	77	60	97.6	52.1	250	53.98	0.146	120.0	37.27	16.2	12.8
9	77	70	104.1	47.7	250	53.98	0.213	120.0	40.55	23.7	17.5
10	77	80	111.0	43.9	250	53.98	0.284	120.0	43.05	31.6	21.9
11	77	90	118.4	40.5	250	53.98	0.344	120.0	44.71	38.3	24.9
12	77	100	126.2	37.6	250	53.98	0.407	120.0	46.17	45.3	27.6
13	77	110	134.3	35.0	250	53.98	0.463	120.0	47.29	51.5	29.5
14	77	112	135.9	34.5	250	53.98	0.474	120.0	47.49	52.8	29.9

NOTE: Study point at 2 meters above ground (or rooftop, see write-up) level.

RESULTS: COLUMN J DISTANCES ARE LESS THAN COLUMN C AND COLUMN K DISTANCES ARE LESS THAN COLUMN A DISTANCES IN ALL INSTANCES; THEREFORE, INTERFERRING SIGNAL DOES NOT EXIST AT ANY LOCATION (TWO METERS OR LESS ABOVE GROUND LEVEL)