


Exhibit 12 - Allocation Study Map & List of Facilities

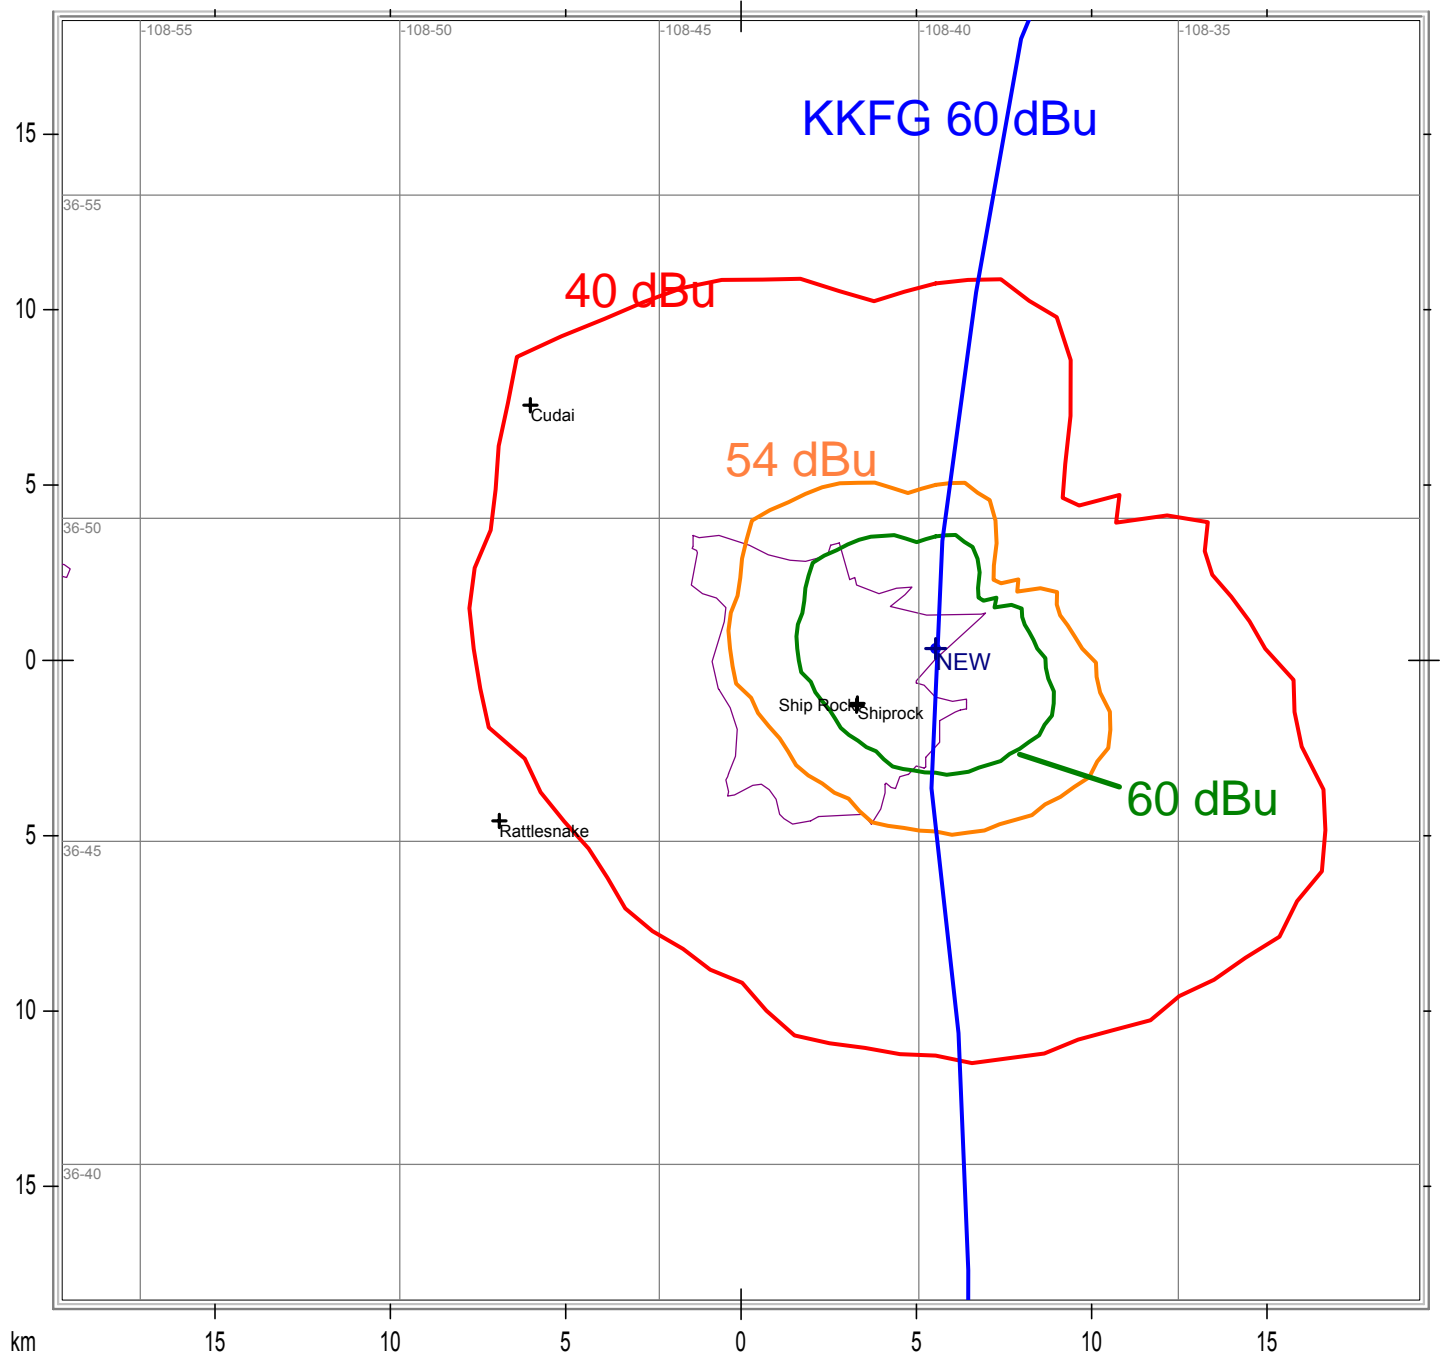

List of Facilities.TXT

Callsign : NEW
 Coordinates : 36-47-59.0 N, 108-39-40.7 W
 Frequency (MHz): 104.10000
 HAAT (m): 119.36 AMSL (m): 1687.00
 Elevation (m): 1574.00 Tower AGL (m): 113.00
 ERP (w): 1
 TX power (w): 0 Gain (dB): 0.00
 City/State : SHIPROCK, NM
 ARN :
 Distance (km): 5
 Licensee : EDGEWATER BROADCASTING INC.

Contour type : F(50,10)
 Signal strength : 54.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 121.4

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	1584	103	4.7	90	1604	83	4.2	180	1557	130	5.2	270	1523	164	5.9
5	1581	106	4.8	95	1588	99	4.6	185	1557	130	5.2	275	1519	168	5.9
10	1578	109	4.8	100	1585	102	4.7	190	1558	129	5.2	280	1519	168	5.9
15	1587	100	4.6	105	1576	111	4.9	195	1556	131	5.3	285	1524	163	5.9
20	1591	96	4.5	110	1554	133	5.3	200	1554	133	5.3	290	1519	168	5.9
25	1609	78	4.0	115	1543	144	5.5	205	1562	125	5.1	295	1509	178	6.1
30	1631	56	3.5	120	1533	154	5.7	210	1571	116	5.0	300	1500	187	6.2
35	1647	40	2.9	125	1536	151	5.6	215	1567	120	5.0	305	1489	198	6.4
40	1661	26	2.6	130	1531	156	5.7	220	1567	120	5.0	310	1504	183	6.2
45	1655	32	2.6	135	1538	149	5.6	225	1562	125	5.1	315	1519	168	5.9
50	1642	45	3.1	140	1541	146	5.6	230	1559	128	5.2	320	1528	159	5.8
55	1649	38	2.8	145	1546	141	5.5	235	1562	125	5.1	325	1536	151	5.6
60	1632	55	3.5	150	1543	144	5.5	240	1562	125	5.1	330	1545	142	5.5
65	1618	69	3.8	155	1548	139	5.4	245	1556	131	5.3	335	1557	130	5.2
70	1624	63	3.7	160	1551	136	5.4	250	1549	138	5.4	340	1566	121	5.1
75	1624	63	3.7	165	1549	138	5.4	255	1546	141	5.5	345	1581	106	4.8
80	1618	69	3.8	170	1551	136	5.4	260	1528	159	5.8	350	1591	96	4.5
85	1611	76	4.0	175	1551	136	5.4	265	1526	161	5.8	355	1588	99	4.6

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 121.4

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	1584	103	3.2	90	1604	83	2.9	180	1557	130	3.6	270	1523	164	4.0
5	1581	106	3.3	95	1588	99	3.2	185	1557	130	3.6	275	1519	168	4.0
10	1578	109	3.3	100	1585	102	3.2	190	1558	129	3.6	280	1519	168	4.0
15	1587	100	3.2	105	1576	111	3.3	195	1556	131	3.6	285	1524	163	3.9
20	1591	96	3.1	110	1554	133	3.6	200	1554	133	3.6	290	1519	168	4.0
25	1609	78	2.8	115	1543	144	3.7	205	1562	125	3.5	295	1509	178	4.1
30	1631	56	2.5	120	1533	154	3.8	210	1571	116	3.4	300	1500	187	4.2
35	1647	40	2.1	125	1536	151	3.8	215	1567	120	3.4	305	1489	198	4.3
40	1661	26	1.9	130	1531	156	3.9	220	1567	120	3.4	310	1504	183	4.2
45	1655	32	1.9	135	1538	149	3.8	225	1562	125	3.5	315	1519	168	4.0
50	1642	45	2.3	140	1541	146	3.8	230	1559	128	3.5	320	1528	159	3.9
55	1649	38	2.1	145	1546	141	3.7	235	1562	125	3.5	325	1536	151	3.8
60	1632	55	2.5	150	1543	144	3.7	240	1562	125	3.5	330	1545	142	3.7
65	1618	69	2.7	155	1548	139	3.7	245	1556	131	3.6	335	1557	130	3.6
70	1624	63	2.6	160	1551	136	3.6	250	1549	138	3.7	340	1566	121	3.5
75	1624	63	2.6	165	1549	138	3.7	255	1546	141	3.7	345	1581	106	3.3
80	1618	69	2.7	170	1551	136	3.6	260	1528	159	3.9	350	1591	96	3.1
85	1611	76	2.8	175	1551	136	3.6	265	1526	161	3.9	355	1588	99	3.2

Contour type : F(50,10)
 Signal strength : 100.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 121.4

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	1584	103	0.1	90	1604	83	0.1	180	1557	130	0.1	270	1523	164	0.1
5	1581	106	0.1	95	1588	99	0.1	185	1557	130	0.1	275	1519	168	0.1

List of Facilities.TXT

10	1578	109	0.1	100	1585	102	0.1	190	1558	129	0.1	280	1519	168	0.1
15	1587	100	0.1	105	1576	111	0.1	195	1556	131	0.1	285	1524	163	0.1
20	1591	96	0.1	110	1554	133	0.1	200	1554	133	0.1	290	1519	168	0.1
25	1609	78	0.1	115	1543	144	0.1	205	1562	125	0.1	295	1509	178	0.1
30	1631	56	0.1	120	1533	154	0.1	210	1571	116	0.1	300	1500	187	0.1
35	1647	40	0.1	125	1536	151	0.1	215	1567	120	0.1	305	1489	198	0.1
40	1661	26	0.1	130	1531	156	0.1	220	1567	120	0.1	310	1504	183	0.1
45	1655	32	0.1	135	1538	149	0.1	225	1562	125	0.1	315	1519	168	0.1
50	1642	45	0.1	140	1541	146	0.1	230	1559	128	0.1	320	1528	159	0.1
55	1649	38	0.1	145	1546	141	0.1	235	1562	125	0.1	325	1536	151	0.1
60	1632	55	0.1	150	1543	144	0.1	240	1562	125	0.1	330	1545	142	0.1
65	1618	69	0.1	155	1548	139	0.1	245	1556	131	0.1	335	1557	130	0.1
70	1624	63	0.1	160	1551	136	0.1	250	1549	138	0.1	340	1566	121	0.1
75	1624	63	0.1	165	1549	138	0.1	255	1546	141	0.1	345	1581	106	0.1
80	1618	69	0.1	170	1551	136	0.1	260	1528	159	0.1	350	1591	96	0.1
85	1611	76	0.1	175	1551	136	0.1	265	1526	161	0.1	355	1588	99	0.1

Contour type : F(50,10)
Signal strength : 40.000 dBu
Area covered : 0.000 sq. km
Population covered: 0 persons
Contour HAAT (m) : 121.4

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	1584	103	10.5	90	1604	83	9.4	180	1557	130	11.7	270	1523	164	13.2
5	1581	106	10.6	95	1588	99	10.3	185	1557	130	11.7	275	1519	168	13.4
10	1578	109	10.8	100	1585	102	10.4	190	1558	129	11.6	280	1519	168	13.4
15	1587	100	10.3	105	1576	111	10.8	195	1556	131	11.7	285	1524	163	13.2
20	1591	96	10.1	110	1554	133	11.8	200	1554	133	11.8	290	1519	168	13.4
25	1609	78	9.1	115	1543	144	12.3	205	1562	125	11.5	295	1509	178	13.8
30	1631	56	7.7	120	1533	154	12.8	210	1571	116	11.1	300	1500	187	14.1
35	1647	40	6.5	125	1536	151	12.6	215	1567	120	11.2	305	1489	198	14.6
40	1661	26	5.6	130	1531	156	12.8	220	1567	120	11.2	310	1504	183	13.9
45	1655	32	5.8	135	1538	149	12.5	225	1562	125	11.5	315	1519	168	13.4
50	1642	45	6.9	140	1541	146	12.4	230	1559	128	11.6	320	1528	159	13.0
55	1649	38	6.3	145	1546	141	12.2	235	1562	125	11.5	325	1536	151	12.6
60	1632	55	7.6	150	1543	144	12.3	240	1562	125	11.5	330	1545	142	12.2
65	1618	69	8.6	155	1548	139	12.1	245	1556	131	11.7	335	1557	130	11.7
70	1624	63	8.2	160	1551	136	11.9	250	1549	138	12.0	340	1566	121	11.3
75	1624	63	8.2	165	1549	138	12.0	255	1546	141	12.2	345	1581	106	10.6
80	1618	69	8.6	170	1551	136	11.9	260	1528	159	13.0	350	1591	96	10.1
85	1611	76	9.0	175	1551	136	11.9	265	1526	161	13.1	355	1588	99	10.3

Contour type : F(50,10)
Signal strength : 90.000 dBu
Area covered : 0.000 sq. km
Population covered: 0 persons
Contour HAAT (m) : 121.4

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	1584	103	0.4	90	1604	83	0.4	180	1557	130	0.4	270	1523	164	0.4
5	1581	106	0.4	95	1588	99	0.4	185	1557	130	0.4	275	1519	168	0.4
10	1578	109	0.4	100	1585	102	0.4	190	1558	129	0.4	280	1519	168	0.4
15	1587	100	0.4	105	1576	111	0.4	195	1556	131	0.4	285	1524	163	0.4
20	1591	96	0.4	110	1554	133	0.4	200	1554	133	0.4	290	1519	168	0.4
25	1609	78	0.4	115	1543	144	0.4	205	1562	125	0.4	295	1509	178	0.4
30	1631	56	0.4	120	1533	154	0.4	210	1571	116	0.4	300	1500	187	0.4
35	1647	40	0.4	125	1536	151	0.4	215	1567	120	0.4	305	1489	198	0.4
40	1661	26	0.4	130	1531	156	0.4	220	1567	120	0.4	310	1504	183	0.4
45	1655	32	0.4	135	1538	149	0.4	225	1562	125	0.4	315	1519	168	0.4
50	1642	45	0.4	140	1541	146	0.4	230	1559	128	0.4	320	1528	159	0.4
55	1649	38	0.4	145	1546	141	0.4	235	1562	125	0.4	325	1536	151	0.4
60	1632	55	0.4	150	1543	144	0.4	240	1562	125	0.4	330	1545	142	0.4
65	1618	69	0.4	155	1548	139	0.4	245	1556	131	0.4	335	1557	130	0.4
70	1624	63	0.4	160	1551	136	0.4	250	1549	138	0.4	340	1566	121	0.4
75	1624	63	0.4	165	1549	138	0.4	255	1546	141	0.4	345	1581	106	0.4
80	1618	69	0.4	170	1551	136	0.4	260	1528	159	0.4	350	1591	96	0.4
85	1611	76	0.4	175	1551	136	0.4	265	1526	161	0.4	355	1588	99	0.4

Callsign : K278AD
Coordinates : 37-22-45.0 N, 108-46-04.0 W
Comments :
Frequency (MHz): 103.50000

List of Facilities.TXT

HAAT (m): 228.97 AMSL (m): 2143.00
 Elevation (m): 2130.00 Tower AGL (m): 13.00
 ERP (w): 10
 TX power (w): 0 Gain (dB): 0.00
 City/State : CORTEZ, ETC., CO
 ARN :
 Distance (km): 64
 Licensee : PROCLAIMING CHRIST'S LOVE MINISTRIES

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 221.1

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2033	110	6.1	90	1913	230	8.9	180	2099	44	3.8	270	1801	342	10.8
5	2039	104	6.0	95	1911	232	8.9	185	2187	-44	3.2	275	1865	278	9.8
10	2030	113	6.2	100	1903	240	9.1	190	2169	-26	3.2	280	1879	264	9.5
15	2008	135	6.7	105	1894	249	9.2	195	2204	-61	3.2	285	1884	259	9.4
20	2032	111	6.2	110	1892	251	9.3	200	2190	-47	3.2	290	1874	269	9.6
25	2035	108	6.1	115	1883	260	9.4	205	2061	82	5.3	295	1891	252	9.3
30	2032	111	6.2	120	1856	287	9.9	210	1945	198	8.2	300	1909	234	8.9
35	2026	117	6.3	125	1824	319	10.4	215	1868	275	9.7	305	1916	227	8.8
40	2022	121	6.4	130	1811	332	10.6	220	1789	354	11.0	310	1927	216	8.6
45	2015	128	6.6	135	1777	366	11.1	225	1752	391	11.5	315	1923	220	8.7
50	1998	145	7.0	140	1787	356	11.0	230	1723	420	11.8	320	1897	246	9.2
55	1986	157	7.3	145	1782	361	11.1	235	1712	431	11.9	325	1917	226	8.8
60	1973	170	7.6	150	1804	339	10.7	240	1681	462	12.3	330	1956	187	7.9
65	1956	187	7.9	155	1838	305	10.2	245	1718	425	11.9	335	1962	181	7.8
70	1942	201	8.2	160	1864	279	9.8	250	1743	400	11.6	340	1986	157	7.3
75	1939	204	8.3	165	1904	239	9.0	255	1777	366	11.1	345	2001	142	6.9
80	1929	214	8.5	170	1953	190	8.0	260	1798	345	10.8	350	2019	124	6.5
85	1923	220	8.7	175	2028	115	6.3	265	1789	354	11.0	355	2020	123	6.5

Contour type : F(50,10)
 Signal strength : 100.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 221.1

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2033	110	0.4	90	1913	230	0.4	180	2099	44	0.4	270	1801	342	0.4
5	2039	104	0.4	95	1911	232	0.4	185	2187	-44	0.4	275	1865	278	0.4
10	2030	113	0.4	100	1903	240	0.4	190	2169	-26	0.4	280	1879	264	0.4
15	2008	135	0.4	105	1894	249	0.4	195	2204	-61	0.4	285	1884	259	0.4
20	2032	111	0.4	110	1892	251	0.4	200	2190	-47	0.4	290	1874	269	0.4
25	2035	108	0.4	115	1883	260	0.4	205	2061	82	0.4	295	1891	252	0.4
30	2032	111	0.4	120	1856	287	0.4	210	1945	198	0.4	300	1909	234	0.4
35	2026	117	0.4	125	1824	319	0.4	215	1868	275	0.4	305	1916	227	0.4
40	2022	121	0.4	130	1811	332	0.4	220	1789	354	0.4	310	1927	216	0.4
45	2015	128	0.4	135	1777	366	0.4	225	1752	391	0.4	315	1923	220	0.4
50	1998	145	0.4	140	1787	356	0.4	230	1723	420	0.4	320	1897	246	0.4
55	1986	157	0.4	145	1782	361	0.4	235	1712	431	0.4	325	1917	226	0.4
60	1973	170	0.4	150	1804	339	0.4	240	1681	462	0.4	330	1956	187	0.4
65	1956	187	0.4	155	1838	305	0.4	245	1718	425	0.4	335	1962	181	0.4
70	1942	201	0.4	160	1864	279	0.4	250	1743	400	0.4	340	1986	157	0.4
75	1939	204	0.4	165	1904	239	0.4	255	1777	366	0.4	345	2001	142	0.4
80	1929	214	0.4	170	1953	190	0.4	260	1798	345	0.4	350	2019	124	0.4
85	1923	220	0.4	175	2028	115	0.4	265	1789	354	0.4	355	2020	123	0.4

Callsign : K278AD
 Coordinates : 37-20-56.0 N, 108-33-07.0 W
 Comments :
 Frequency (MHz): 103.50000
 HAAT (m): -107.97 AMSL (m): 1888.00
 Elevation (m): 1840.00 Tower AGL (m): 48.00
 ERP (w): 250
 TX power (w): 0 Gain (dB): 0.00
 City/State : CORTEZ, ETC., CO
 ARN :
 Distance (km): 63
 Licensee : PROCLAIMING CHRIST'S LOVE MINISTRIES

List of Facilities.TXT

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : -105.5

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2020	-132	1.6	90	1994	-106	1.6	180	2124	-236	4.4	270	1893	-5	6.4
5	2021	-133	1.6	95	1998	-110	1.6	185	2111	-223	4.8	275	1907	-19	6.2
10	2032	-144	1.6	100	2008	-120	1.6	190	2143	-255	5.2	280	1892	-4	5.9
15	2033	-145	1.6	105	2027	-139	1.6	195	2116	-228	5.6	285	1906	-18	5.6
20	2026	-138	1.6	110	2058	-170	1.6	200	2076	-188	5.9	290	1916	-28	5.2
25	2039	-151	1.6	115	2110	-222	1.6	205	2019	-131	6.2	295	1908	-20	4.8
30	2038	-150	1.6	120	2139	-251	1.6	210	1934	-46	6.4	300	1906	-18	4.4
35	2038	-150	1.6	125	2121	-233	1.6	215	1850	38	7.4	305	1906	-18	3.8
40	2034	-146	1.6	130	2177	-289	1.6	220	1817	71	10.5	310	1905	-17	3.1
45	2022	-134	1.6	135	2203	-315	1.6	225	1800	88	11.8	315	1912	-24	2.5
50	2023	-135	1.6	140	2163	-275	1.6	230	1789	99	12.7	320	1924	-36	1.8
55	2023	-135	1.6	145	2153	-265	1.6	235	1785	103	13.0	325	1932	-44	1.7
60	2022	-134	1.6	150	2151	-263	1.6	240	1782	106	13.2	330	1939	-51	1.6
65	2032	-144	1.6	155	2144	-256	1.7	245	1787	101	12.9	335	1949	-61	1.6
70	2028	-140	1.6	160	2147	-259	1.8	250	1804	84	11.7	340	1964	-76	1.6
75	2018	-130	1.6	165	2140	-252	2.5	255	1804	84	11.5	345	1976	-88	1.6
80	2004	-116	1.6	170	2148	-260	3.1	260	1796	92	11.8	350	1995	-107	1.6
85	1987	-99	1.6	175	2112	-224	3.8	265	1830	58	9.3	355	2004	-116	1.6

Contour type : F(50,10)
 Signal strength : 100.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : -105.5

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2020	-132	0.1	90	1994	-106	0.1	180	2124	-236	0.7	270	1893	-5	1.0
5	2021	-133	0.1	95	1998	-110	0.1	185	2111	-223	0.7	275	1907	-19	0.9
10	2032	-144	0.1	100	2008	-120	0.1	190	2143	-255	0.8	280	1892	-4	0.9
15	2033	-145	0.1	105	2027	-139	0.1	195	2116	-228	0.9	285	1906	-18	0.9
20	2026	-138	0.1	110	2058	-170	0.1	200	2076	-188	0.9	290	1916	-28	0.8
25	2039	-151	0.1	115	2110	-222	0.1	205	2019	-131	0.9	295	1908	-20	0.7
30	2038	-150	0.1	120	2139	-251	0.1	210	1934	-46	1.0	300	1906	-18	0.7
35	2038	-150	0.1	125	2121	-233	0.1	215	1850	38	1.0	305	1906	-18	0.6
40	2034	-146	0.1	130	2177	-289	0.1	220	1817	71	1.0	310	1905	-17	0.4
45	2022	-134	0.1	135	2203	-315	0.1	225	1800	88	1.0	315	1912	-24	0.2
50	2023	-135	0.1	140	2163	-275	0.1	230	1789	99	1.1	320	1924	-36	0.1
55	2023	-135	0.1	145	2153	-265	0.1	235	1785	103	1.1	325	1932	-44	0.1
60	2022	-134	0.1	150	2151	-263	0.1	240	1782	106	1.1	330	1939	-51	0.1
65	2032	-144	0.1	155	2144	-256	0.1	245	1787	101	1.1	335	1949	-61	0.1
70	2028	-140	0.1	160	2147	-259	0.1	250	1804	84	1.1	340	1964	-76	0.1
75	2018	-130	0.1	165	2140	-252	0.2	255	1804	84	1.0	345	1976	-88	0.1
80	2004	-116	0.1	170	2148	-260	0.4	260	1796	92	1.0	350	1995	-107	0.1
85	1987	-99	0.1	175	2112	-224	0.6	265	1830	58	1.0	355	2004	-116	0.1

Callsign : K280AE
 Coordinates : 37-54-53.0 N, 107-49-20.0 W
 Comments : Translator for KJYE, Grand Junction, CO.
 Frequency (MHz): 103.90000
 HAAT (m): 358.67 AMSL (m): 3637.00
 Elevation (m): 3460.00 Tower AGL (m): 177.00
 ERP (w): 48
 TX power (w): 0 Gain (dB): 0.00
 City/State : TELLURIDE, CO
 ARN :
 Distance (km): 147
 Licensee : PROFESSIONAL ANTENNA, TWR TRANS SEV.

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 329.2

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

List of Facilities.TXT

0	3203	434	17.9	90	3560	77	7.5	180	3641	-4	4.7	270	2864	773	24.4
5	3140	497	19.3	95	3569	68	7.0	185	3609	28	4.7	275	2856	781	24.5
10	3331	306	15.0	100	3547	90	8.1	190	3484	153	10.7	280	2842	795	24.7
15	3396	241	13.3	105	3618	19	4.7	195	3475	162	11.0	285	2811	826	25.2
20	3470	167	11.2	110	3627	10	4.7	200	3444	193	12.0	290	2727	910	26.3
25	3453	184	11.7	115	3614	23	4.7	205	3345	292	14.7	295	2613	1024	27.9
30	3538	99	8.6	120	3544	93	8.3	210	3174	463	18.5	300	2736	901	26.2
35	3536	101	8.6	125	3512	125	9.6	215	3183	454	18.3	305	2818	819	25.1
40	3443	194	12.0	130	3600	37	5.2	220	3213	424	17.7	310	2953	684	23.1
45	3279	358	16.3	135	3475	162	11.0	225	3235	402	17.2	315	2969	668	22.8
50	3125	512	19.6	140	3514	123	9.5	230	3248	389	17.0	320	3003	634	22.2
55	3294	343	15.9	145	3619	18	4.7	235	3331	306	15.0	325	3141	496	19.2
60	3449	188	11.8	150	3620	17	4.7	240	3243	394	17.1	330	3328	309	15.1
65	3509	128	9.7	155	3614	23	4.7	245	3190	447	18.2	335	3290	347	16.0
70	3446	191	11.9	160	3558	79	7.6	250	3129	508	19.5	340	3248	389	17.0
75	3439	198	12.1	165	3516	121	9.4	255	3050	587	21.3	345	3249	388	16.9
80	3454	183	11.7	170	3545	92	8.2	260	2965	672	22.9	350	3319	318	15.3
85	3512	125	9.6	175	3583	54	6.3	265	2906	731	23.8	355	3274	363	16.4

Contour type : F(50,10)
Signal strength : 54.000 dBu
Area covered : 0.000 sq. km
Population covered: 0 persons
Contour HAAT (m) : 329.2

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	3203	434	27.1	90	3560	77	10.7	180	3641	-4	6.6	270	2864	773	38.0
5	3140	497	29.0	95	3569	68	10.1	185	3609	28	6.6	275	2856	781	38.2
10	3331	306	22.5	100	3547	90	11.5	190	3484	153	15.1	280	2842	795	38.6
15	3396	241	20.0	105	3618	19	6.6	195	3475	162	15.7	285	2811	826	39.3
20	3470	167	16.1	110	3627	10	6.6	200	3444	193	17.6	290	2727	910	41.3
25	3453	184	17.1	115	3614	23	6.6	205	3345	292	22.0	295	2613	1024	43.8
30	3538	99	12.0	120	3544	93	11.7	210	3174	463	28.0	300	2736	901	41.0
35	3536	101	12.1	125	3512	125	13.4	215	3183	454	27.8	305	2818	819	39.1
40	3443	194	17.7	130	3600	37	7.3	220	3213	424	26.8	310	2953	684	35.7
45	3279	358	24.3	135	3475	162	15.7	225	3235	402	25.9	315	2969	668	35.2
50	3125	512	29.5	140	3514	123	13.3	230	3248	389	25.5	320	3003	634	34.0
55	3294	343	23.8	145	3619	18	6.6	235	3331	306	22.5	325	3141	496	29.0
60	3449	188	17.4	150	3620	17	6.6	240	3243	394	25.7	330	3328	309	22.6
65	3509	128	13.6	155	3614	23	6.6	245	3190	447	27.6	335	3290	347	23.9
70	3446	191	17.5	160	3558	79	10.8	250	3129	508	29.4	340	3248	389	25.5
75	3439	198	17.9	165	3516	121	13.2	255	3050	587	32.3	345	3249	388	25.4
80	3454	183	17.1	170	3545	92	11.6	260	2965	672	35.3	350	3319	318	22.9
85	3512	125	13.4	175	3583	54	9.0	265	2906	731	37.0	355	3274	363	24.5

Callsign : K281AC
Coordinates : 37-21-54.0 N, 108-08-46.0 W
Comments :
Frequency (MHz): 104.10000
HAAT (m): 402.76 AMSL (m): 3122.00
Elevation (m): 3020.00 Tower AGL (m): 102.00
ERP (w): 10
TX power (w): 0 Gain (dB): 0.00
City/State : MANCOS, CO
ARN :
Distance (km): 81
Licensee : SOUTHWEST COLORADO TV TRANSLATOR. ASSOCIATION

Contour type : F(50,50)
Signal strength : 60.000 dBu
Area covered : 0.000 sq. km
Population covered: 0 persons
Contour HAAT (m) : 424.2

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	3098	24	1.5	90	2977	145	2.9	180	2386	736	2.9	270	2293	829	15.8
5	3167	-45	1.4	95	2825	297	3.4	185	2388	734	3.5	275	2309	813	15.5
10	3185	-63	1.3	100	2809	313	3.1	190	2373	749	4.1	280	2337	785	15.0
15	3216	-94	1.4	105	2694	428	2.9	195	2373	749	3.5	285	2382	740	13.8
20	3274	-152	1.4	110	2588	534	2.5	200	2341	781	2.9	290	2419	703	12.8
25	3303	-181	1.5	115	2620	502	2.2	205	2293	829	2.7	295	2451	671	11.3
30	3330	-208	1.6	120	2621	501	1.8	210	2291	831	2.4	300	2474	648	9.9
35	3414	-292	1.5	125	2562	560	2.0	215	2362	760	3.1	305	2523	599	8.4

List of Facilities.TXT

40	3474	-352	1.5	130	2533	589	2.3	220	2339	783	3.8	310	2570	552	6.9
45	3464	-342	1.5	135	2559	563	2.6	225	2369	753	5.7	315	2607	515	5.4
50	3299	-177	1.4	140	2529	593	2.9	230	2396	726	7.3	320	2651	471	3.7
55	3287	-165	1.3	145	2493	629	3.0	235	2366	756	8.9	325	2719	403	2.9
60	3200	-78	1.3	150	2491	631	3.1	240	2364	758	10.4	330	2741	381	2.2
65	3165	-43	1.4	155	2452	670	2.8	245	2380	742	11.7	335	2790	332	2.5
70	3166	-44	1.5	160	2436	686	2.5	250	2361	761	13.2	340	2862	260	2.6
75	3228	-106	1.5	165	2432	690	2.1	255	2331	791	14.2	345	2918	204	2.9
80	3124	-2	1.6	170	2409	713	1.8	260	2269	853	15.4	350	3009	113	2.6
85	3048	74	2.1	175	2379	743	2.4	265	2275	847	15.7	355	3076	46	1.8

Contour type : F(50,10)
Signal strength : 40.000 dBu
Area covered : 0.000 sq. km
Population covered: 0 persons
Contour HAAT (m) : 424.2

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	3098	24	3.7	90	2977	145	10.0	180	2386	736	19.2	270	2293	829	58.4
5	3167	-45	3.3	95	2825	297	13.7	185	2388	734	21.8	275	2309	813	57.3
10	3185	-63	2.9	100	2809	313	13.4	190	2373	749	24.4	280	2337	785	55.8
15	3216	-94	3.1	105	2694	428	14.5	195	2373	749	22.2	285	2382	740	52.4
20	3274	-152	3.4	110	2588	534	14.4	200	2341	781	20.2	290	2419	703	49.2
25	3303	-181	3.6	115	2620	502	12.7	205	2293	829	19.2	295	2451	671	44.8
30	3330	-208	3.9	120	2621	501	11.2	210	2291	831	17.5	300	2474	648	40.5
35	3414	-292	3.8	125	2562	560	12.6	215	2362	760	20.5	305	2523	599	34.9
40	3474	-352	3.7	130	2533	589	14.0	220	2339	783	23.8	310	2570	552	28.9
45	3464	-342	3.5	135	2559	563	15.1	225	2369	753	29.7	315	2607	515	23.8
50	3299	-177	3.2	140	2529	593	17.2	230	2396	726	34.5	320	2651	471	17.9
55	3287	-165	3.0	145	2493	629	18.3	235	2366	756	39.9	325	2719	403	14.0
60	3200	-78	2.9	150	2491	631	18.7	240	2364	758	44.0	330	2741	381	11.8
65	3165	-43	3.2	155	2452	670	17.9	245	2380	742	47.2	335	2790	332	11.8
70	3166	-44	3.5	160	2436	686	16.6	250	2361	761	51.1	340	2862	260	11.2
75	3228	-106	3.8	165	2432	690	14.8	255	2331	791	54.1	345	2918	204	10.9
80	3124	-2	4.1	170	2409	713	13.0	260	2269	853	58.0	350	3009	113	8.7
85	3048	74	6.8	175	2379	743	16.6	265	2275	847	58.4	355	3076	46	5.1

Callsign : K281AJ
Coordinates : 38-31-43.0 N, 109-19-29.0 W
Comments :
Frequency (MHz): 104.10000
HAAT (m): 359.64 AMSL (m): 2637.00
Elevation (m): 2560.00 Tower AGL (m): 77.00
ERP (w): 10
TX power (w): 0 Gain (dB): 0.00
City/State : MOAB, UT
ARN :
Distance (km): 199
Licensee : ROYCE'S ELECTRONICS INC.

Contour type : F(50,50)
Signal strength : 60.000 dBu
Area covered : 0.000 sq. km
Population covered: 0 persons
Contour HAAT (m) : 362.9

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	1864	773	10.4	90	3079	-442	2.5	180	2244	393	11.2	270	1703	934	16.2
5	1922	715	10.0	95	3098	-461	2.5	185	2182	455	12.0	275	1693	944	16.1
10	1933	704	9.8	100	3099	-462	2.5	190	2133	504	12.4	280	1693	944	16.0
15	2092	545	9.0	105	3155	-518	2.5	195	2079	558	13.0	285	1699	938	15.8
20	2124	513	8.7	110	3027	-390	2.6	200	2004	633	14.0	290	1726	911	15.5
25	2162	475	8.5	115	2983	-346	2.6	205	1976	661	14.3	295	1751	886	15.1
30	2214	423	8.1	120	2936	-299	2.7	210	1945	692	14.7	300	1790	847	14.6
35	2306	331	7.4	125	2977	-340	2.7	215	1862	775	15.4	305	1833	804	14.1
40	2401	236	6.3	130	3026	-389	2.8	220	1842	795	15.6	310	1887	750	13.5
45	2500	137	4.9	135	3052	-415	2.8	225	1827	810	15.7	315	1950	687	12.8
50	2593	44	2.8	140	3061	-424	2.8	230	1818	819	15.8	320	1998	639	12.1
55	2640	-3	2.4	145	2984	-347	2.9	235	1824	813	15.7	325	1926	711	12.3
60	2723	-86	2.4	150	2983	-346	2.9	240	1818	819	15.8	330	1808	829	12.5
65	2807	-170	2.4	155	2883	-246	2.9	245	1808	829	15.8	335	1781	856	12.3
70	2884	-247	2.4	160	2776	-139	3.0	250	1799	838	15.8	340	1758	879	12.0

List of Facilities.TXT

75	2957	-320	2.4	165	2668	-31	3.0	255	1792	845	15.8	345	1822	815	11.4
80	3009	-372	2.4	170	2539	98	5.6	260	1752	885	16.0	350	1768	869	11.2
85	3042	-405	2.4	175	2369	268	9.3	265	1729	908	16.1	355	1848	789	10.7

Contour type : F(50,10)
 Signal strength : 40.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 362.9

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	1864	773	44.3	90	3079	-442	7.6	180	2244	393	38.5	270	1703	934	60.9
5	1922	715	42.1	95	3098	-461	7.7	185	2182	455	42.1	275	1693	944	60.9
10	1933	704	41.3	100	3099	-462	7.7	190	2133	504	44.9	280	1693	944	60.7
15	2092	545	35.1	105	3155	-518	7.9	195	2079	558	48.1	285	1699	938	60.1
20	2124	513	33.6	110	3027	-390	8.0	200	2004	633	51.3	290	1726	911	59.0
25	2162	475	32.0	115	2983	-346	8.2	205	1976	661	52.5	295	1751	886	57.8
30	2214	423	29.7	120	2936	-299	8.3	210	1945	692	53.7	300	1790	847	56.2
35	2306	331	25.9	125	2977	-340	8.5	215	1862	775	56.6	305	1833	804	54.2
40	2401	236	22.0	130	3026	-389	8.7	220	1842	795	57.3	310	1887	750	51.8
45	2500	137	15.9	135	3052	-415	8.9	225	1827	810	57.8	315	1950	687	48.9
50	2593	44	8.9	140	3061	-424	9.0	230	1818	819	58.1	320	1998	639	46.4
55	2640	-3	7.3	145	2984	-347	9.2	235	1824	813	57.9	325	1926	711	48.1
60	2723	-86	7.4	150	2983	-346	9.3	240	1818	819	58.1	330	1808	829	51.0
65	2807	-170	7.4	155	2883	-246	9.5	245	1808	829	58.3	335	1781	856	50.8
70	2884	-247	7.4	160	2776	-139	9.6	250	1799	838	58.6	340	1758	879	50.5
75	2957	-320	7.4	165	2668	-31	9.7	255	1792	845	58.7	345	1822	815	47.8
80	3009	-372	7.5	170	2539	98	18.2	260	1752	885	59.8	350	1768	869	48.5
85	3042	-405	7.5	175	2369	268	30.9	265	1729	908	60.3	355	1848	789	45.4

Callsign : KBAC
 Coordinates : 35-46-50.0 N, 106-31-35.0 W
 Comments :
 Frequency (MHz): 104.10000
 HAAT (m): 571.86 AMSL (m): 3057.00
 Elevation (m): 2960.00 Tower AGL (m): 97.00
 ERP (w): 100000
 TX power (w): 100 Gain (dB): 0.00
 City/State : SANTA FE, NM
 ARN :
 Distance (km): 227
 Licensee : CITICASTERS LICENSES, L.P.

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 574.0

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2790	267	69.7	90	2448	609	92.2	180	2368	689	95.2	270	2431	626	92.8
5	2739	318	73.7	95	2415	642	93.4	185	2449	608	92.2	275	2449	608	92.2
10	2686	371	77.6	100	2394	663	94.2	190	2477	580	91.0	280	2473	584	91.2
15	2648	409	80.4	105	2359	698	95.6	195	2494	563	90.3	285	2491	566	90.4
20	2663	394	79.3	110	2291	766	98.3	200	2453	604	92.0	290	2462	595	91.7
25	2695	362	77.0	115	2287	770	98.5	205	2416	641	93.4	295	2434	623	92.7
30	2708	349	76.0	120	2251	806	99.8	210	2434	623	92.7	300	2503	554	89.8
35	2681	376	78.0	125	2199	858	101.8	215	2434	623	92.7	305	2514	543	89.3
40	2737	320	73.9	130	2205	852	101.6	220	2406	651	93.8	310	2500	557	90.0
45	2820	237	67.2	135	2197	860	101.9	225	2321	736	97.1	315	2507	550	89.6
50	2787	270	69.9	140	2217	840	101.1	230	2318	739	97.3	320	2532	525	88.2
55	2717	340	75.3	145	2224	833	100.9	235	2338	719	96.5	325	2569	488	86.0
60	2642	415	80.8	150	2232	825	100.6	240	2367	690	95.3	330	2679	378	78.1
65	2597	460	84.1	155	2238	819	100.3	245	2387	670	94.5	335	2759	298	72.2
70	2543	514	87.6	160	2211	846	101.4	250	2417	640	93.4	340	2864	193	63.2
75	2496	561	90.2	165	2197	860	101.9	255	2393	664	94.3	345	2906	151	58.6
80	2457	600	91.8	170	2236	821	100.4	260	2402	655	93.9	350	2878	179	61.8
85	2431	626	92.8	175	2314	743	97.4	265	2411	646	93.6	355	2786	271	70.0

Callsign : KKFG
 Coordinates : 36-38-33.0 N, 107-46-54.0 W

List of Facilities.TXT

Comments :
 Frequency (MHz): 104.50000
 HAAT (m): 331.96 AMSL (m): 2188.00
 Elevation (m): 2130.00 Tower AGL (m): 58.00
 ERP (w): 100000
 TX power (w): 100 Gain (dB): 0.00
 City/State : BLOOMFIELD, NM
 ARN :
 Distance (km): 85
 Licensee : CAPSTAR TX LIMITED PARTNERSHIP

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 332.9

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	1764	424	81.5	90	1837	351	76.1	180	1952	236	67.1	270	1818	370	77.5
5	1766	422	81.4	95	1839	349	76.0	185	1949	239	67.3	275	1811	377	78.1
10	1781	407	80.3	100	1842	346	75.8	190	1955	233	66.8	280	1789	399	79.7
15	1804	384	78.6	105	1888	300	72.4	195	1971	217	65.4	285	1773	415	80.8
20	1822	366	77.2	110	1911	277	70.5	200	1977	211	64.8	290	1757	431	82.0
25	1852	336	75.1	115	1900	288	71.4	205	1985	203	64.1	295	1736	452	83.5
30	1857	331	74.7	120	1889	299	72.3	210	2008	180	61.9	300	1728	460	84.1
35	1884	304	72.7	125	1888	300	72.4	215	2006	182	62.1	305	1731	457	83.9
40	1886	302	72.5	130	1874	314	73.4	220	1954	234	66.9	310	1740	448	83.2
45	1889	299	72.3	135	1901	287	71.3	225	1931	257	68.8	315	1757	431	82.0
50	1882	306	72.8	140	1941	247	68.0	230	1898	290	71.6	320	1763	425	81.6
55	1886	302	72.5	145	1916	272	70.1	235	1879	309	73.1	325	1773	415	80.8
60	1884	304	72.7	150	1887	301	72.5	240	1865	323	74.1	330	1792	396	79.5
65	1871	317	73.7	155	1858	330	74.6	245	1852	336	75.1	335	1796	392	79.2
70	1855	333	74.8	160	1869	319	73.8	250	1848	340	75.3	340	1786	402	79.9
75	1862	326	74.3	165	1887	301	72.5	255	1821	367	77.3	345	1781	407	80.3
80	1865	323	74.1	170	1909	279	70.7	260	1809	379	78.2	350	1773	415	80.8
85	1864	324	74.2	175	1923	265	69.5	265	1813	375	77.9	355	1760	428	81.8

Callsign : KYVA
 Coordinates : 35-28-03.0 N, 108-14-25.0 W
 Comments :
 Frequency (MHz): 103.70000
 HAAT (m): 413.56 AMSL (m): 2698.00
 Elevation (m): 2620.00 Tower AGL (m): 78.00
 ERP (w): 100000
 TX power (w): 100 Gain (dB): 0.00
 City/State : GRANTS, NM
 ARN :
 Distance (km): 154
 Licensee : MILLENNIUM MEDIA, INC.

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 416.2

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2335	363	77.0	90	2344	354	76.4	180	2258	440	82.7	270	2216	482	85.6
5	2337	361	76.9	95	2327	371	77.6	185	2264	434	82.2	275	2217	481	85.5
10	2352	346	75.8	100	2314	384	78.6	190	2269	429	81.9	280	2216	482	85.6
15	2371	327	74.4	105	2314	384	78.6	195	2265	433	82.2	285	2236	462	84.3
20	2387	311	73.2	110	2261	437	82.4	200	2268	430	81.9	290	2276	422	81.4
25	2381	317	73.7	115	2221	477	85.3	205	2272	426	81.6	295	2312	386	78.7
30	2350	348	75.9	120	2211	487	85.9	210	2275	423	81.4	300	2362	336	75.1
35	2328	370	77.5	125	2189	509	87.3	215	2268	430	81.9	305	2409	289	71.5
40	2319	379	78.2	130	2179	519	87.9	220	2284	414	80.8	310	2388	310	73.1
45	2302	396	79.5	135	2182	516	87.7	225	2282	416	80.9	315	2358	340	75.3
50	2297	401	79.8	140	2192	506	87.1	230	2272	426	81.6	320	2334	364	77.1
55	2291	407	80.3	145	2203	495	86.4	235	2272	426	81.6	325	2314	384	78.6
60	2278	420	81.2	150	2217	481	85.5	240	2270	428	81.8	330	2301	397	79.5
65	2269	429	81.9	155	2227	471	84.9	245	2256	442	82.8	335	2289	409	80.4
70	2276	422	81.4	160	2237	461	84.2	250	2243	455	83.8	340	2284	414	80.8

List of Facilities.TXT

75	2294	404	80.1	165	2249	449	83.3	255	2231	467	84.6	345	2297	401	79.8
80	2314	384	78.6	170	2253	445	83.0	260	2231	467	84.6	350	2301	397	79.5
85	2301	397	79.5	175	2259	439	82.6	265	2218	480	85.5	355	2321	377	78.1

Callsign : NEW
 Coordinates : 37-21-53.0 N, 107-46-55.8 W
 Comments :
 Frequency (MHz): 103.90000
 HAAT (m): 589.81 AMSL (m): 3033.00
 Elevation (m): 2870.00 Tower AGL (m): 163.00
 ERP (w): 10
 TX power (w): 0 Gain (dB): 0.00
 City/State : DURANGO, CO
 ARN :
 Distance (km): 104
 Licensee : EDGEWATER BROADCASTING INC.

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 567.7

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2358	675	14.5	90	2583	450	12.1	180	2225	808	15.7	270	2503	530	12.8
5	2545	488	12.5	95	2488	545	13.0	185	2222	811	15.7	275	2512	521	12.8
10	2664	369	11.2	100	2465	568	13.3	190	2239	794	15.6	280	2506	527	12.8
15	2811	222	8.7	105	2448	585	13.5	195	2244	789	15.6	285	2531	502	12.6
20	2916	117	6.3	110	2385	648	14.3	200	2277	756	15.3	290	2563	470	12.3
25	3009	24	3.2	115	2415	618	13.9	205	2287	746	15.2	295	2606	427	11.9
30	3009	24	3.2	120	2401	632	14.1	210	2241	792	15.6	300	2564	469	12.3
35	2985	48	4.0	125	2416	617	13.9	215	2215	818	15.8	305	2434	599	13.7
40	2909	124	6.5	130	2397	636	14.1	220	2204	829	15.8	310	2432	601	13.7
45	2923	110	6.1	135	2388	645	14.2	225	2186	847	16.0	315	2378	655	14.3
50	2936	97	5.8	140	2361	672	14.5	230	2248	785	15.5	320	2311	722	15.0
55	2891	142	6.9	145	2337	696	14.8	235	2277	756	15.3	325	2226	807	15.7
60	2821	212	8.5	150	2305	728	15.1	240	2314	719	15.0	330	2365	668	14.5
65	2791	242	9.1	155	2279	754	15.3	245	2282	751	15.3	335	2483	550	13.1
70	2728	305	10.2	160	2270	763	15.4	250	2256	777	15.5	340	2478	555	13.1
75	2711	322	10.5	165	2264	769	15.4	255	2296	737	15.1	345	2319	714	14.9
80	2675	358	11.0	170	2253	780	15.5	260	2337	696	14.8	350	2258	775	15.4
85	2637	396	11.5	175	2233	800	15.6	265	2409	624	14.0	355	2264	769	15.4

Contour type : F(50,10)
 Signal strength : 54.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 567.7

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2358	675	23.0	90	2583	450	18.3	180	2225	808	25.3	270	2503	530	19.8
5	2545	488	19.0	95	2488	545	20.2	185	2222	811	25.3	275	2512	521	19.7
10	2664	369	16.0	100	2465	568	20.7	190	2239	794	25.0	280	2506	527	19.8
15	2811	222	12.2	105	2448	585	21.1	195	2244	789	25.0	285	2531	502	19.3
20	2916	117	8.9	110	2385	648	22.5	200	2277	756	24.5	290	2563	470	18.7
25	3009	24	4.5	115	2415	618	21.9	205	2287	746	24.3	295	2606	427	17.7
30	3009	24	4.5	120	2401	632	22.2	210	2241	792	25.0	300	2564	469	18.7
35	2985	48	5.7	125	2416	617	21.8	215	2215	818	25.4	305	2434	599	21.4
40	2909	124	9.1	130	2397	636	22.2	220	2204	829	25.6	310	2432	601	21.5
45	2923	110	8.6	135	2388	645	22.4	225	2186	847	25.8	315	2378	655	22.6
50	2936	97	8.0	140	2361	672	23.0	230	2248	785	24.9	320	2311	722	23.9
55	2891	142	9.8	145	2337	696	23.4	235	2277	756	24.5	325	2226	807	25.2
60	2821	212	12.0	150	2305	728	24.0	240	2314	719	23.8	330	2365	668	22.9
65	2791	242	12.8	155	2279	754	24.4	245	2282	751	24.4	335	2483	550	20.3
70	2728	305	14.3	160	2270	763	24.6	250	2256	777	24.8	340	2478	555	20.4
75	2711	322	14.7	165	2264	769	24.7	255	2296	737	24.1	345	2319	714	23.8
80	2675	358	15.7	170	2253	780	24.8	260	2337	696	23.4	350	2258	775	24.8
85	2637	396	16.8	175	2233	800	25.1	265	2409	624	22.0	355	2264	769	24.7

Callsign : NEW
 Coordinates : 37-21-53.0 N, 107-46-55.8 W

List of Facilities.TXT

Comments :
 Frequency (MHz): 104.10000
 HAAT (m): 589.81 AMSL (m): 3033.00
 Elevation (m): 2870.00 Tower AGL (m): 163.00
 ERP (w): 10
 TX power (w): 0 Gain (dB): 0.00
 City/State : DURANGO, CO
 ARN :
 Distance (km): 104
 Licensee : EDGEWATER BROADCASTING INC.

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 567.7

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2358	675	14.5	90	2583	450	12.1	180	2225	808	15.7	270	2503	530	12.8
5	2545	488	12.5	95	2488	545	13.0	185	2222	811	15.7	275	2512	521	12.8
10	2664	369	11.2	100	2465	568	13.3	190	2239	794	15.6	280	2506	527	12.8
15	2811	222	8.7	105	2448	585	13.5	195	2244	789	15.6	285	2531	502	12.6
20	2916	117	6.3	110	2385	648	14.3	200	2277	756	15.3	290	2563	470	12.3
25	3009	24	3.2	115	2415	618	13.9	205	2287	746	15.2	295	2606	427	11.9
30	3009	24	3.2	120	2401	632	14.1	210	2241	792	15.6	300	2564	469	12.3
35	2985	48	4.0	125	2416	617	13.9	215	2215	818	15.8	305	2434	599	13.7
40	2909	124	6.5	130	2397	636	14.1	220	2204	829	15.8	310	2432	601	13.7
45	2923	110	6.1	135	2388	645	14.2	225	2186	847	16.0	315	2378	655	14.3
50	2936	97	5.8	140	2361	672	14.5	230	2248	785	15.5	320	2311	722	15.0
55	2891	142	6.9	145	2337	696	14.8	235	2277	756	15.3	325	2226	807	15.7
60	2821	212	8.5	150	2305	728	15.1	240	2314	719	15.0	330	2365	668	14.5
65	2791	242	9.1	155	2279	754	15.3	245	2282	751	15.3	335	2483	550	13.1
70	2728	305	10.2	160	2270	763	15.4	250	2256	777	15.5	340	2478	555	13.1
75	2711	322	10.5	165	2264	769	15.4	255	2296	737	15.1	345	2319	714	14.9
80	2675	358	11.0	170	2253	780	15.5	260	2337	696	14.8	350	2258	775	15.4
85	2637	396	11.5	175	2233	800	15.6	265	2409	624	14.0	355	2264	769	15.4

Contour type : F(50,10)
 Signal strength : 40.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 567.7

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2358	675	53.2	90	2583	450	42.6	180	2225	808	57.7	270	2503	530	47.0
5	2545	488	44.6	95	2488	545	47.9	185	2222	811	57.8	275	2512	521	46.5
10	2664	369	37.9	100	2465	568	49.0	190	2239	794	57.3	280	2506	527	46.8
15	2811	222	29.0	105	2448	585	49.8	195	2244	789	57.1	285	2531	502	45.4
20	2916	117	21.0	110	2385	648	52.2	200	2277	756	56.0	290	2563	470	43.7
25	3009	24	10.2	115	2415	618	51.1	205	2287	746	55.7	295	2606	427	41.3
30	3009	24	10.2	120	2401	632	51.6	210	2241	792	57.2	300	2564	469	43.6
35	2985	48	12.7	125	2416	617	51.0	215	2215	818	58.1	305	2434	599	50.4
40	2909	124	21.6	130	2397	636	51.8	220	2204	829	58.4	310	2432	601	50.4
45	2923	110	20.3	135	2388	645	52.1	225	2186	847	59.0	315	2378	655	52.5
50	2936	97	18.9	140	2361	672	53.1	230	2248	785	57.0	320	2311	722	54.8
55	2891	142	23.2	145	2337	696	53.9	235	2277	756	56.0	325	2226	807	57.7
60	2821	212	28.4	150	2305	728	55.0	240	2314	719	54.7	330	2365	668	52.9
65	2791	242	30.2	155	2279	754	55.9	245	2282	751	55.8	335	2483	550	48.1
70	2728	305	34.1	160	2270	763	56.2	250	2256	777	56.7	340	2478	555	48.4
75	2711	322	35.0	165	2264	769	56.4	255	2296	737	55.3	345	2319	714	54.5
80	2675	358	37.3	170	2253	780	56.8	260	2337	696	53.9	350	2258	775	56.6
85	2637	396	39.5	175	2233	800	57.5	265	2409	624	51.3	355	2264	769	56.4

Callsign : NEW
 Coordinates : 37-15-43.0 N, 107-54-19.0 W
 Comments :
 Frequency (MHz): 104.10000
 HAAT (m): 106.26 AMSL (m): 2373.00
 Elevation (m): 2320.00 Tower AGL (m): 53.00
 ERP (w): 120
 TX power (w): 0 Gain (dB): 0.00
 City/State : DURANGO, CO

List of Facilities.TXT

ARN :
 Distance (km): 89
 Licensee : CAPSTAR TX LIMITED PARTNERSHIP

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 126.7

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2493	-120	5.9	90	2153	220	16.0	180	2033	340	20.1	270	2332	41	6.8
5	2454	-81	5.9	95	2142	231	16.4	185	2054	319	19.5	275	2355	18	5.9
10	2367	6	5.9	100	2116	257	17.4	190	2073	300	18.9	280	2377	-4	5.9
15	2237	136	12.5	105	2100	273	18.0	195	2106	267	17.8	285	2416	-43	5.9
20	2133	240	16.8	110	2089	284	18.3	200	2149	224	16.2	290	2402	-29	5.9
25	2094	279	18.2	115	2084	289	18.5	205	2181	192	14.9	295	2443	-70	5.9
30	2221	152	13.2	120	2074	299	18.8	210	2237	136	12.5	300	2466	-93	5.9
35	2265	108	11.2	125	2057	316	19.4	215	2288	85	10.0	305	2431	-58	5.9
40	2339	34	6.2	130	2054	319	19.5	220	2302	71	9.1	310	2433	-60	5.9
45	2360	13	5.9	135	2028	345	20.2	225	2252	121	11.8	315	2483	-110	5.9
50	2301	72	9.2	140	2021	352	20.4	230	2209	164	13.8	320	2472	-99	5.9
55	2240	133	12.3	145	2045	328	19.7	235	2216	157	13.5	325	2441	-68	5.9
60	2206	167	13.9	150	2038	335	19.9	240	2234	139	12.6	330	2473	-100	5.9
65	2231	142	12.8	155	2034	339	20.0	245	2257	116	11.6	335	2562	-189	5.9
70	2248	125	12.0	160	2026	347	20.2	250	2267	106	11.1	340	2521	-148	5.9
75	2250	123	11.9	165	2017	356	20.5	255	2304	69	9.0	345	2453	-80	5.9
80	2202	171	14.1	170	1987	386	21.3	260	2316	57	8.2	350	2451	-78	5.9
85	2183	190	14.9	175	2003	370	20.9	265	2327	46	7.3	355	2529	-156	5.9

Contour type : F(50,10)
 Signal strength : 40.000 dBu
 Area covered : 0.000 sq. km
 Population covered: 0 persons
 Contour HAAT (m) : 126.7

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	2493	-120	19.6	90	2153	220	52.1	180	2033	340	63.0	270	2332	41	22.9
5	2454	-81	19.6	95	2142	231	53.2	185	2054	319	61.1	275	2355	18	19.6
10	2367	6	19.6	100	2116	257	55.6	190	2073	300	59.4	280	2377	-4	19.6
15	2237	136	42.2	105	2100	273	57.0	195	2106	267	56.5	285	2416	-43	19.6
20	2133	240	54.1	110	2089	284	58.0	200	2149	224	52.5	290	2402	-29	19.6
25	2094	279	57.5	115	2084	289	58.4	205	2181	192	48.9	295	2443	-70	19.6
30	2221	152	44.1	120	2074	299	59.3	210	2237	136	42.2	300	2466	-93	19.6
35	2265	108	38.2	125	2057	316	60.8	215	2288	85	33.6	305	2431	-58	19.6
40	2339	34	20.8	130	2054	319	61.1	220	2302	71	30.2	310	2433	-60	19.6
45	2360	13	19.6	135	2028	345	63.5	225	2252	121	40.2	315	2483	-110	19.6
50	2301	72	30.5	140	2021	352	64.2	230	2209	164	45.5	320	2472	-99	19.6
55	2240	133	41.8	145	2045	328	61.9	235	2216	157	44.7	325	2441	-68	19.6
60	2206	167	45.9	150	2038	335	62.6	240	2234	139	42.5	330	2473	-100	19.6
65	2231	142	42.9	155	2034	339	63.0	245	2257	116	39.5	335	2562	-189	19.6
70	2248	125	40.7	160	2026	347	63.7	250	2267	106	37.8	340	2521	-148	19.6
75	2250	123	40.4	165	2017	356	64.5	255	2304	69	29.8	345	2453	-80	19.6
80	2202	171	46.4	170	1987	386	67.0	260	2316	57	27.1	350	2451	-78	19.6
85	2183	190	48.6	175	2003	370	65.7	265	2327	46	24.3	355	2529	-156	19.6

Callsign : NEW
 Coordinates : 36-46-54.0 N, 107-59-24.0 W
 Comments :
 Frequency (MHz): 103.70000
 HAAT (m): 138.78 AMSL (m): 1911.00
 Elevation (m): 1830.00 Tower AGL (m): 81.00
 ERP (w): 100
 TX power (w): 0 Gain (dB): 0.00
 City/State : AZTEC, NM
 ARN :
 Distance (km): 65
 Licensee : NEW MEXICO STATE HIGHWAY AND TRANSPORTATION DEPARTMENT

Contour type : F(50,50)
 Signal strength : 60.000 dBu
 Area covered : 0.000 sq. km

List of Facilities.TXT

Population covered: 0 persons

Contour HAAT (m) : 135.7

Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist	Brg	AT	HAAT	Dist
0	1797	114	11.0	90	1864	47	7.0	180	1707	204	14.7	270	1716	195	14.4
5	1788	123	11.4	95	1829	82	9.4	185	1711	200	14.5	275	1725	186	14.0
10	1776	135	11.9	100	1814	97	10.2	190	1722	189	14.2	280	1737	174	13.6
15	1771	140	12.1	105	1796	115	11.0	195	1708	203	14.6	285	1749	162	13.1
20	1777	134	11.8	110	1783	128	11.6	200	1704	207	14.8	290	1746	165	13.2
25	1788	123	11.4	115	1769	142	12.2	205	1702	209	14.9	295	1758	153	12.7
30	1818	93	10.0	120	1761	150	12.6	210	1706	205	14.7	300	1764	147	12.4
35	1827	84	9.5	125	1744	167	13.3	215	1700	211	14.9	305	1767	144	12.3
40	1849	62	8.1	130	1725	186	14.0	220	1703	208	14.8	310	1783	128	11.6
45	1876	35	6.0	135	1725	186	14.0	225	1703	208	14.8	315	1790	121	11.3
50	1890	21	5.6	140	1728	183	13.9	230	1704	207	14.8	320	1799	112	10.9
55	1916	-5	5.6	145	1722	189	14.2	235	1712	199	14.5	325	1799	112	10.9
60	1934	-23	5.6	150	1723	188	14.1	240	1724	187	14.1	330	1804	107	10.7
65	1963	-52	5.6	155	1731	180	13.8	245	1735	176	13.7	335	1809	102	10.4
70	1948	-37	5.6	160	1733	178	13.8	250	1735	176	13.7	340	1801	110	10.8
75	1928	-17	5.6	165	1730	181	13.9	255	1719	192	14.3	345	1799	112	10.9
80	1904	7	5.6	170	1726	185	14.0	260	1708	203	14.6	350	1810	101	10.4
85	1881	30	5.6	175	1718	193	14.3	265	1706	205	14.7	355	1807	104	10.5