

Non-Interference Compliance

Regarding Facility id 148362

Channel 257

Description of Exhibit 12 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Pages 4 and 5 include a plot and a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 6 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dBμ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 7 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 8 of this exhibit is a high resolution aerial photo of the vicinity surrounding the proposed translator's tower site provided by the U.S. Geological Survey's National Aerial Photography Program. It has been included to provide clarification of the nature of the buildings in the vicinity.

Note: The USGS map and the aerial photo indicate the presence of buildings in the zone of predicted interference, the tallest of which is no higher than 35ft (10.7m). This application provides 19.8m (65 ft) of ground clearance which is more than adequate to provide the necessary clearance so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

Application_id	File Number	Callsign	Contour at Tower	Min. Contour
701045	BLH20031126ASO	WBZE	64.9	64.9
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				64.9

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **64.9 dBμ**, this makes the proposed translator's worst-case interfering contour **104.9 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **207.3 m** from the transmit antenna.

The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 7 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **19.8 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference. Hence, in accordance with 47 C.F.R. § 74.1204(d) and the clarification provided by the FCC in the decision *Re: Living Way Ministries* (FCC 02-244), a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Note: The USGS map and the aerial photo indicate the presence of buildings in the zone of predicted interference, the tallest of which is no higher than 35ft (10.7m). This application provides 19.8m (65 ft) of ground clearance which is more than adequate to provide the necessary clearance so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Antenna Manufacturer:	NIC
Antenna Model:	BKG77-2(.5)
CORAGL:	78 m
Maximum ERP:	0.027 kW
Interfering Contour:	104.9 dBμ
Max Int. Contour Distance:	207.3 m
Min Ground Clearance:	19.8 m

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
5	.973	25.6	201.7	201.0	60.4
10	.933	23.5	193.4	190.5	44.4
15	.855	19.7	177.3	171.2	32.1
20	.777	16.3	161.1	151.4	22.9
25	.664	11.9	137.7	124.8	19.8
30	.560	8.5	116.1	100.6	19.9
35	.456	5.6	94.5	77.4	23.8
40	.365	3.6	75.7	58.0	29.4
45	.292	2.3	60.5	42.8	35.2
50	.227	1.4	47.1	30.3	41.9
55	.172	0.8	35.7	20.5	48.8
60	.126	0.4	26.1	13.1	55.4
65	.096	0.2	19.9	8.4	60.0
70	.072	0.1	14.9	5.1	64.0
75	.056	0.1	11.6	3.0	66.8
80	.046	0.1	9.5	1.7	68.6
85	.039	0.0	8.1	0.7	69.9
90	.035	0.0	7.3	0.0	70.7
Minimum Clearance above TGL:					19.8 m

TX station: TV Mondiale

Site name: Monte Alto

Frequency: 100.00 MHz


Vertical diagram at an azimuth of 0° degrees

Dep (°)	Er (%)	ERP (KW)	Dep (°)	Er (%)	ERP (KW)	Dep (°)	Er (%)	ERP (KW)
0.0	100.0	8.73	120.0	4.5	0.02	240.0	4.5	0.02
2.0	99.1	8.57	122.0	4.6	0.02	242.0	4.3	0.02
4.0	98.0	8.38	124.0	4.7	0.02	244.0	4.1	0.01
6.0	96.6	8.15	126.0	4.9	0.02	246.0	3.9	0.01
8.0	95.1	7.89	128.0	5.0	0.02	248.0	3.8	0.01
10.0	93.3	7.60	130.0	5.1	0.02	250.0	3.7	0.01
12.0	90.3	7.11	132.0	5.3	0.02	252.0	3.6	0.01
14.0	87.1	6.62	134.0	5.4	0.03	254.0	3.4	0.01
16.0	83.9	6.15	136.0	5.6	0.03	256.0	3.3	0.01
18.0	80.9	5.71	138.0	5.8	0.03	258.0	3.3	0.01
20.0	77.7	5.28	140.0	6.1	0.03	260.0	3.3	0.01
22.0	73.1	4.67	142.0	6.5	0.04	262.0	3.3	0.01
24.0	68.6	4.10	144.0	6.8	0.04	264.0	3.3	0.01
26.0	64.2	3.60	146.0	7.2	0.05	266.0	3.4	0.01
28.0	60.0	3.15	148.0	7.6	0.05	268.0	3.4	0.01
30.0	56.0	2.73	150.0	7.9	0.05	270.0	3.5	0.01
32.0	51.7	2.33	152.0	8.2	0.06	272.0	3.6	0.01
34.0	47.5	1.97	154.0	8.4	0.06	274.0	3.8	0.01
36.0	43.6	1.66	156.0	8.7	0.07	276.0	4.0	0.01
38.0	40.0	1.40	158.0	8.9	0.07	278.0	4.2	0.02
40.0	36.5	1.17	160.0	9.1	0.07	280.0	4.6	0.02
42.0	33.5	0.98	162.0	9.2	0.07	282.0	4.9	0.02
44.0	30.5	0.81	164.0	9.3	0.08	284.0	5.3	0.02
46.0	27.8	0.67	166.0	9.4	0.08	286.0	5.9	0.03
48.0	25.1	0.55	168.0	9.5	0.08	288.0	6.5	0.04
50.0	22.7	0.45	170.0	9.5	0.08	290.0	7.2	0.05
52.0	20.3	0.36	172.0	9.5	0.08	292.0	8.1	0.06
54.0	18.2	0.29	174.0	9.5	0.08	294.0	9.1	0.07
56.0	16.2	0.23	176.0	9.5	0.08	296.0	10.1	0.09
58.0	14.3	0.18	178.0	9.5	0.08	298.0	11.3	0.11
60.0	12.6	0.14	180.0	9.4	0.08	300.0	12.6	0.14
62.0	11.3	0.11	182.0	9.5	0.08	302.0	14.3	0.18
64.0	10.1	0.09	184.0	9.5	0.08	304.0	16.2	0.23
66.0	9.1	0.07	186.0	9.6	0.08	306.0	18.2	0.29
68.0	8.1	0.06	188.0	9.5	0.08	308.0	20.3	0.36
70.0	7.2	0.05	190.0	9.5	0.08	310.0	22.7	0.45
72.0	6.5	0.04	192.0	9.5	0.08	312.0	25.1	0.55
74.0	5.9	0.03	194.0	9.4	0.08	314.0	27.8	0.67
76.0	5.3	0.02	196.0	9.3	0.08	316.0	30.5	0.81
78.0	4.9	0.02	198.0	9.2	0.07	318.0	33.5	0.98
80.0	4.6	0.02	200.0	9.1	0.07	320.0	36.5	1.17
82.0	4.2	0.02	202.0	8.9	0.07	322.0	40.0	1.40
84.0	4.0	0.01	204.0	8.7	0.07	324.0	43.6	1.66
86.0	3.8	0.01	206.0	8.4	0.06	326.0	47.5	1.97
88.0	3.6	0.01	208.0	8.2	0.06	328.0	51.7	2.33
90.0	3.5	0.01	210.0	7.9	0.05	330.0	56.0	2.73
92.0	3.4	0.01	212.0	7.6	0.05	332.0	60.0	3.15
94.0	3.4	0.01	214.0	7.2	0.05	334.0	64.2	3.60
96.0	3.3	0.01	216.0	6.8	0.04	336.0	68.6	4.10
98.0	3.3	0.01	218.0	6.5	0.04	338.0	73.1	4.67
100.0	3.3	0.01	220.0	6.1	0.03	340.0	77.7	5.28
102.0	3.3	0.01	222.0	5.8	0.03	342.0	80.9	5.71
104.0	3.3	0.01	224.0	5.6	0.03	344.0	83.9	6.15
106.0	3.4	0.01	226.0	5.4	0.03	346.0	87.1	6.62
108.0	3.6	0.01	228.0	5.3	0.02	348.0	90.3	7.11
110.0	3.7	0.01	230.0	5.1	0.02	350.0	93.3	7.60
112.0	3.8	0.01	232.0	5.0	0.02	352.0	95.1	7.89
114.0	3.9	0.01	234.0	4.9	0.02	354.0	96.6	8.15
116.0	4.1	0.01	236.0	4.7	0.02	356.0	98.0	8.38
118.0	4.3	0.02	238.0	4.6	0.02	358.0	99.1	8.57

TX station: TV Mondiale
Frequency: 100.00 MHz

Site name: Monte Alto


Vertical diagram

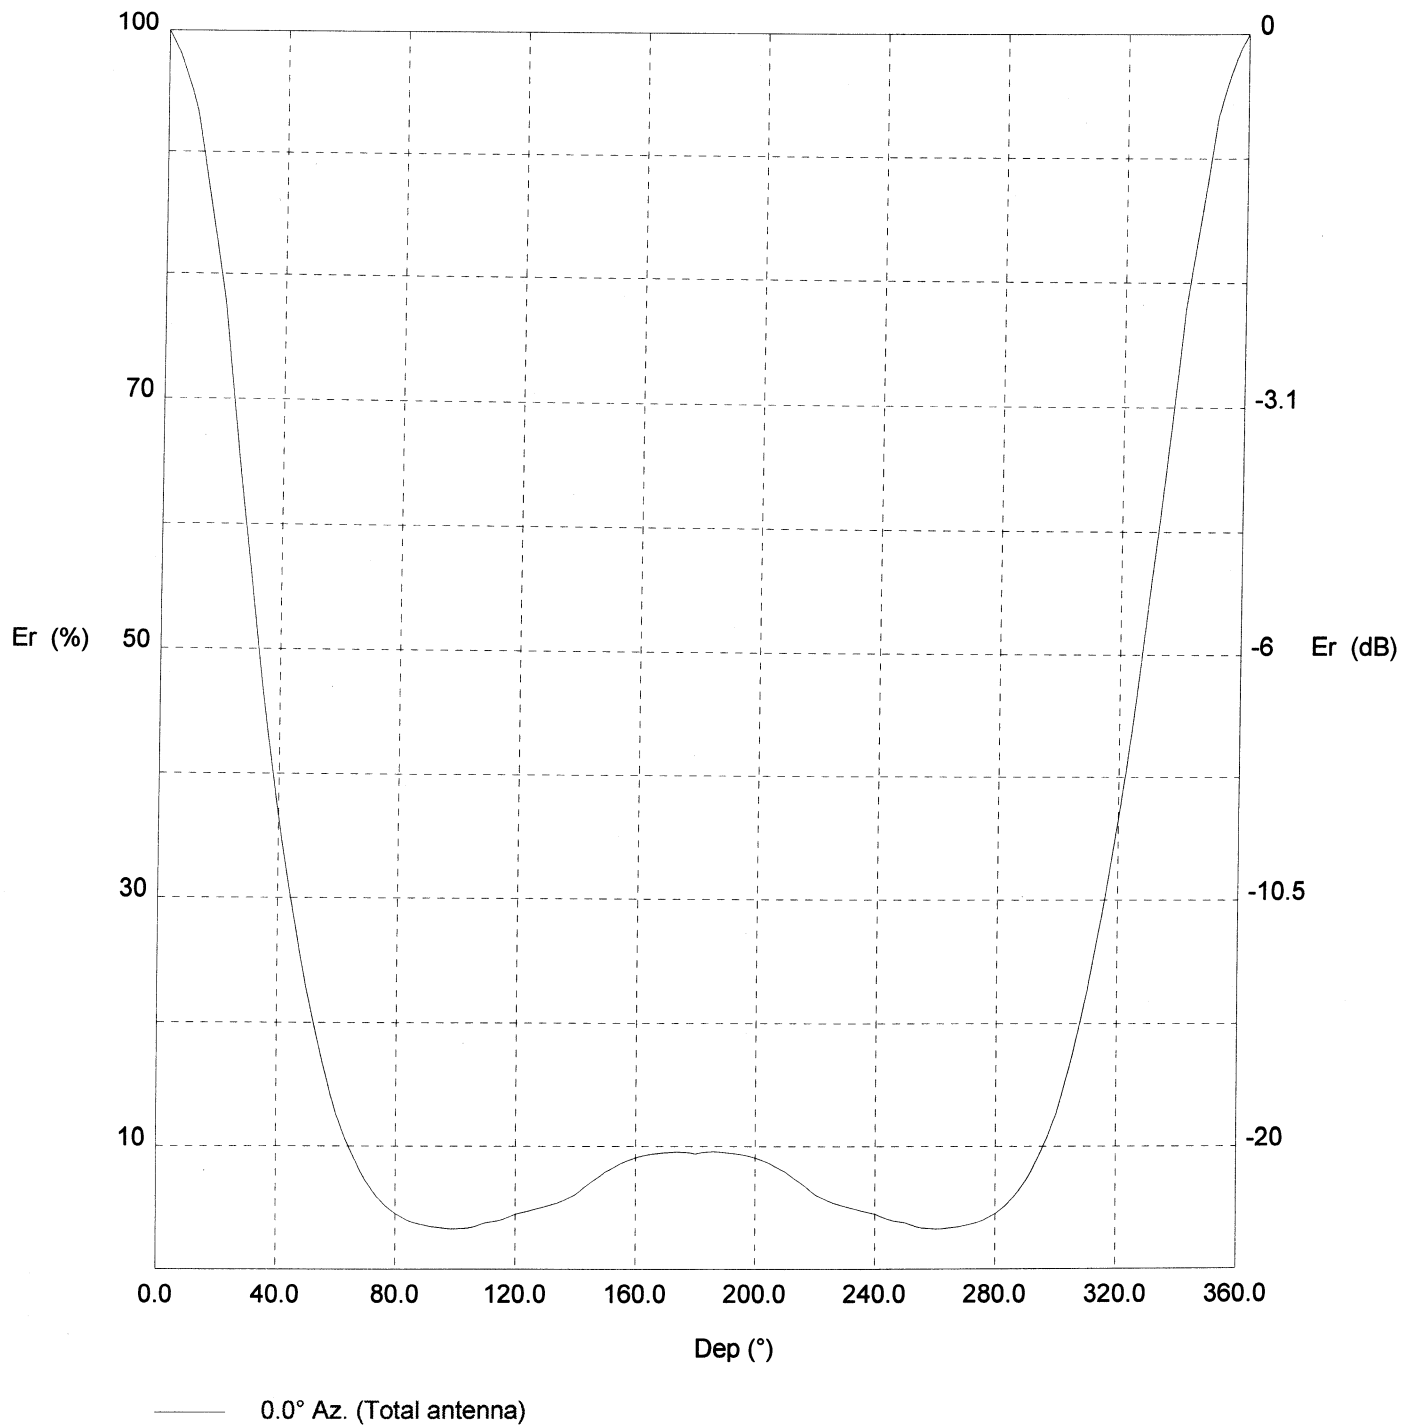

Adjacent Channel Study
For Station W260BS, Facility_id: 148362

Co-channel through third adjacent:

Application_id	Facility_id	Prefix	ARN	Call	Licensee	Class	City	State	Status	ERP	RCMSL	Channel	Adj	Dist	Overlap
701045	28164	BLH	20031126ASO	WBZE	CUMULUS LICENSING CORP.	C1	TALLAHASSEE	FL	LIC	99.2	219	255	2	52.3	0.1611
645341	152220	BNPFT	20030317DPZ	NEW	EDGEWATER BROADCASTING, INC.	D	CAIRO	GA	APP	0.013	177.3	257	0	28.5	0
1234167	144622	BLFT	20080213AER	W258BC	WAY-FM MEDIA GROUP, INC	D	PERKINS	FL	LIC	0.25	123	258	1	54.4	0
1139632	9311	BLH	20060713AAB	WEGT	OPUS BROADCASTING TALLAHASSEE, LLC	A	LAFAYETTE	FL	LIC	5.5	127	260	3	54.7	0
78129	73674	BLH	19850506KS	WOOF-FM	WOOF, INC.	C1	DOTHAN	AL	LIC	100	380	259	2	80.3	0
633075	141481	BNPFT	20030312ABK	NEW	LIVING PROOF, INC.	D	ALBANY	GA	APP	0.01	197	256	1	86.4	0
1228470	71343	BLH	20080122APF	WKAA	RTG RADIO, LLC	C1	WILLACOOCHEE	GA	LIC	73	302	258	1	116.4	0
155303	73617	BLH	19901206KB	WEBZ	CLEAR CHANNEL RADIO LICENSES, INC.	C2	MEXICO BEACH	FL	LIC	50	153	257	0	125.7	0

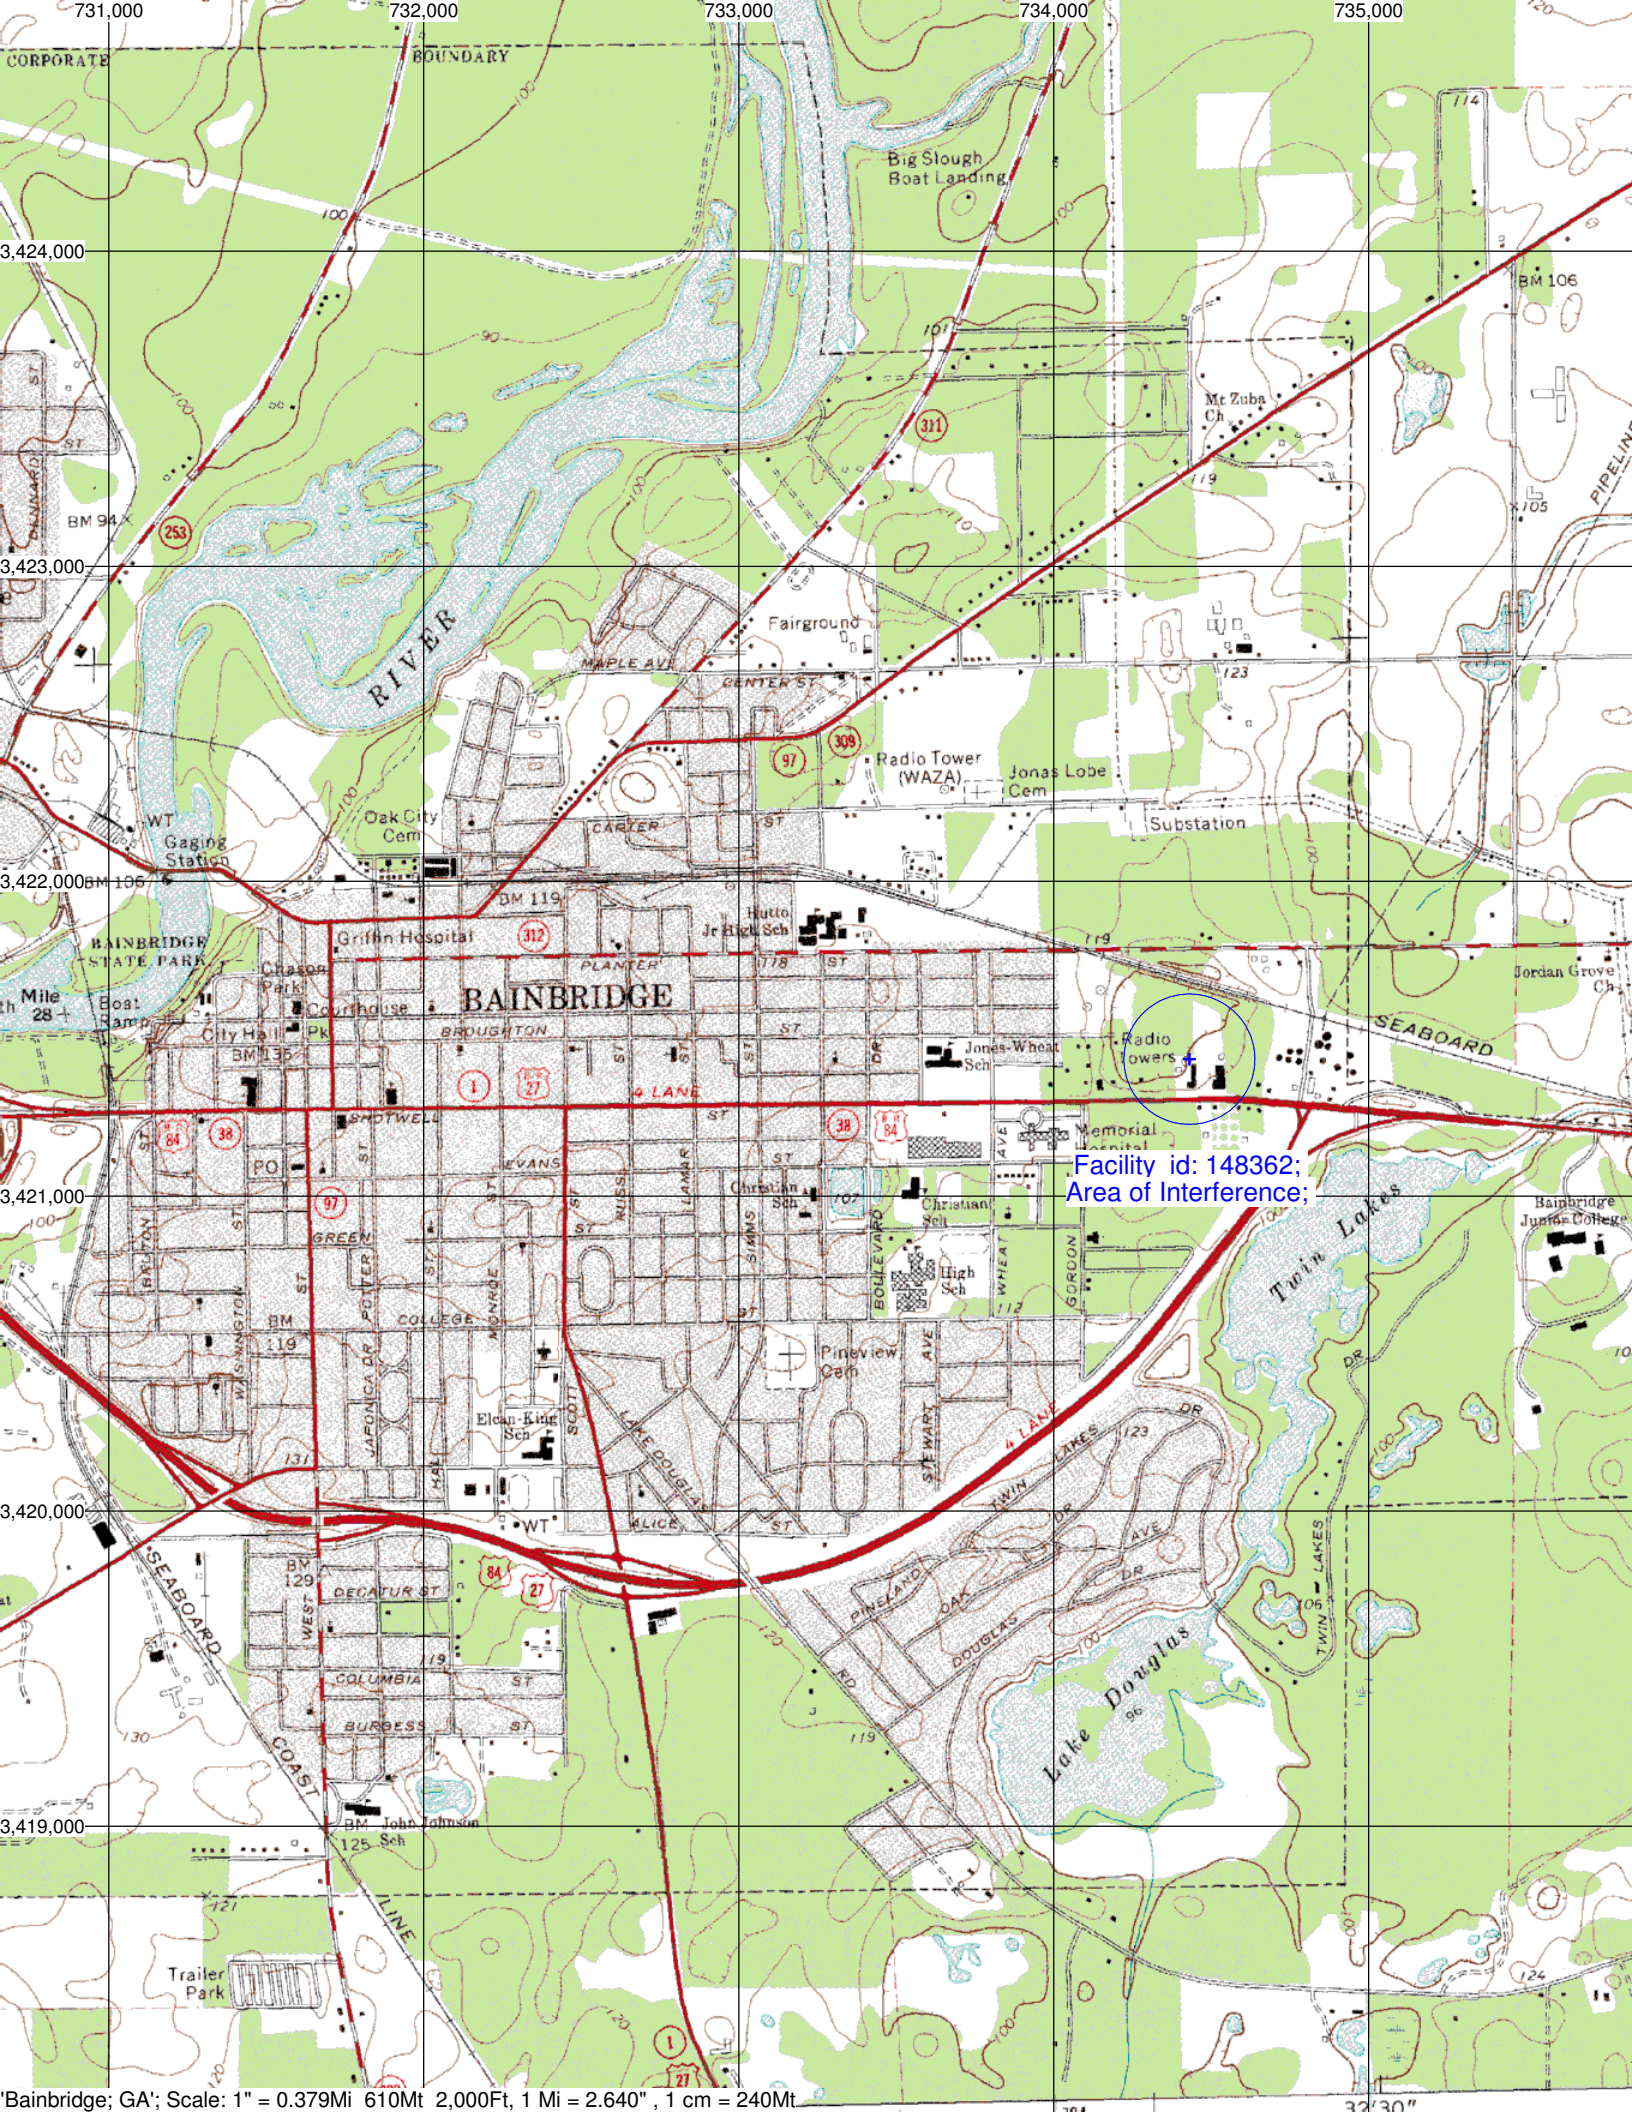

Facility id: 148362;
Area of Interference;



30.9049

30.9046

30.9049