

Exhibit 35 – Environmental Protection Act:

KOTX:

At the RCAGL of 23 meters, less 2 meters, specified in this application, the RFE is calculated using the formula

$$S = \frac{33.4 (F^2) ERP}{R^2}$$

R = 21 meters

ERP = 2 KW

F = 0.305

S = 14.1 $\mu\text{W}/\text{cm}^2$ which is 7.1 % of the 200 $\mu\text{W}/\text{cm}^2$ maximum allowable for uncontrolled public access.

Antenna used will be a non-directional 2 bay RVR MODEL ACP1 or similar. From the antenna manufacture's published data, maximum RF vertical field is 0.305 at 53.6 degrees.

Additional Raditors Co-located On Tower

K239BK facility ID 140288

K278BT facility ID 142610

RFE for K239BK:

$$S = \frac{33.4 (F^2) ERP}{R^2}$$

R = 18 meters

ERP = 0.1 KW

F = 1

S = 10.3 $\mu\text{W}/\text{cm}^2$ which is 5.2 % of the 200 $\mu\text{W}/\text{cm}^2$ maximum allowable for uncontrolled public access.

RFE for K278BT:

$$S = \frac{33.4 (F^2) ERP}{R^2}$$

R = 16 meters

ERP = 0.1 KW

F = 1

S = 13.1 $\mu\text{W}/\text{cm}^2$ which is 6.5 % of the 200 $\mu\text{W}/\text{cm}^2$ maximum allowable for uncontrolled public access.

Total RFE for all three RF radiators:

S = 37.5 $\mu\text{W}/\text{cm}^2$ which is 18.8 % of the 200 $\mu\text{W}/\text{cm}^2$ maximum allowable for uncontrolled public access.

Aerial photo of site and antenna pattern data included in this exhibit.

Applicant will reduce power or cease operations whenever there are personnel on the tower. Applicant will post required signage.



Google earth



Antenna Project

TELECOMUNICAZIONI FERRARA

TX station: *BROADCAST DEPOT 4*

Site Name: *BROADCAST DEPOT 4*

Frequency: *98.00 MHz*

Date: *06.10.2014*

General data of antenna System

TX station	BROADCAST DEPOT 4
Site Name	BROADCAST DEPOT 4
System of coordinates	WGS84
Longitude	
Latitude	
Ground level a.s.l. (m)	1.0
Antenna system height (m)	1.0
Transmitter power(Watt)	1.000
Carrier wave frequency (MHz)	98.000
Antenna system central frequency (MHz)	98.000
Antenna base diagrams type 1	TELECFE-ACP1
Antenna base diagrams type 2	-
Polarization (H/V/C/X)	C
Transmitting cable attenuation (dB)	0.0
Additional attenuations(dB)	0.0
Base diagrams sectors (T = All, F = Front)	T
Velocity factor of cables to Antennas (0÷1)	1.00
Coordinate System(C = cartesian, P = polar)	P
Mast side / diameter(cm)	0.0
Mast cross section (T/Q/C)	Q
Structure rotation w.r.t. North (°)	0.0
Mast rotation w.r.t. North (°)	0.0

Information about antennas used in the System

	<i>Antenna type 1</i>
Manufacturer	TELECFE
Antenna model	ACP1
Band start(MHz)	87
Band stop(MHz)	108
diagrams Frequency(MHz)	98
Polariz (H	C
Vertical dist (cm)	320
Height (cm)	250
Width (cm)	170
Thickness (cm)	150
Weight (Kg)	80
Maximum power (KW)	4
Gain (dBd)	-1.71
North E.C. (cm)	70
East E.C. (cm)	0
Return loss (dB)	0
R.C.Phase (°)	0

TX station: BROADCAST DEPOT 4

Frequency: 98.00 MHz

Gain solid integration : disabled

Site Name: BROADCAST DEPOT 4


Geometr. and electrical data of antenna System

	<i>Power</i> (%)	<i>Tilt</i> (°)	<i>Az.</i> (°/N)	<i>Phase</i> (°)		<i>V dist.</i> (m)	<i>Scr-d</i> (cm)	<i>Scr-Az</i> (°/N)	<i>Rot.</i> (1÷4)	<i>Type</i> (1÷2)	<i>L cables</i> (cm)	<i>Car. phase</i> (°)
1	50.000	0	0	0 +0.0		1.30	0.0	0.0	1	1	600.0	0.0
2	50.000	0	0	0 +0.0		-1.30	0.0	0.0	1	1	600.0	0.0

06/10/2014 16:50:29
TX station: BROADCAST DEPOT 4
Frequency: 98.00 MHz
Gain solid integration : disabled

Site Name: BROADCAST DEPOT 4


Plan of antenna system

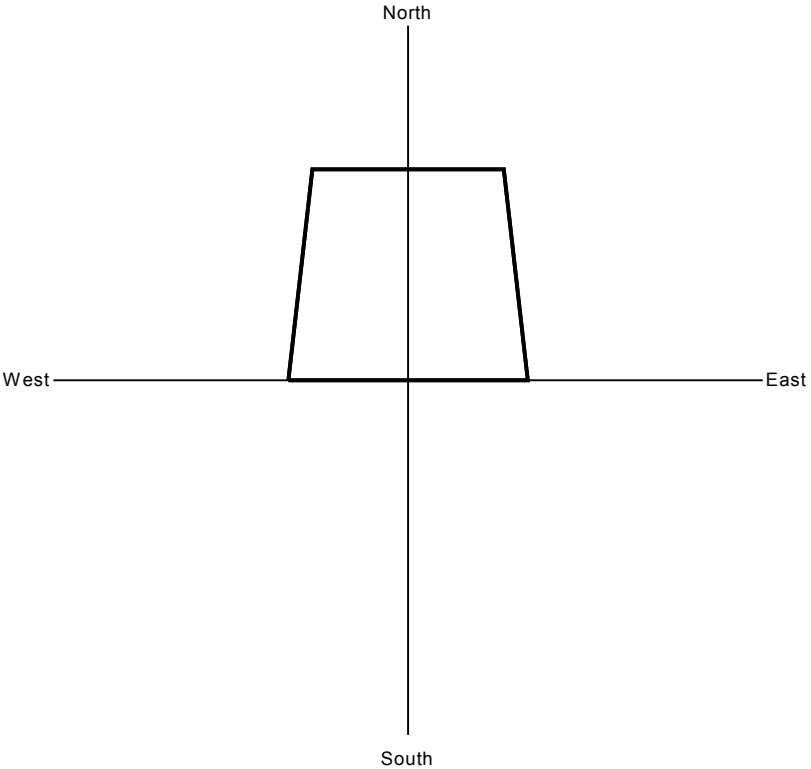

Side of antenna system



Horizontal diagram at 0.0° depres. (Total Antenna)

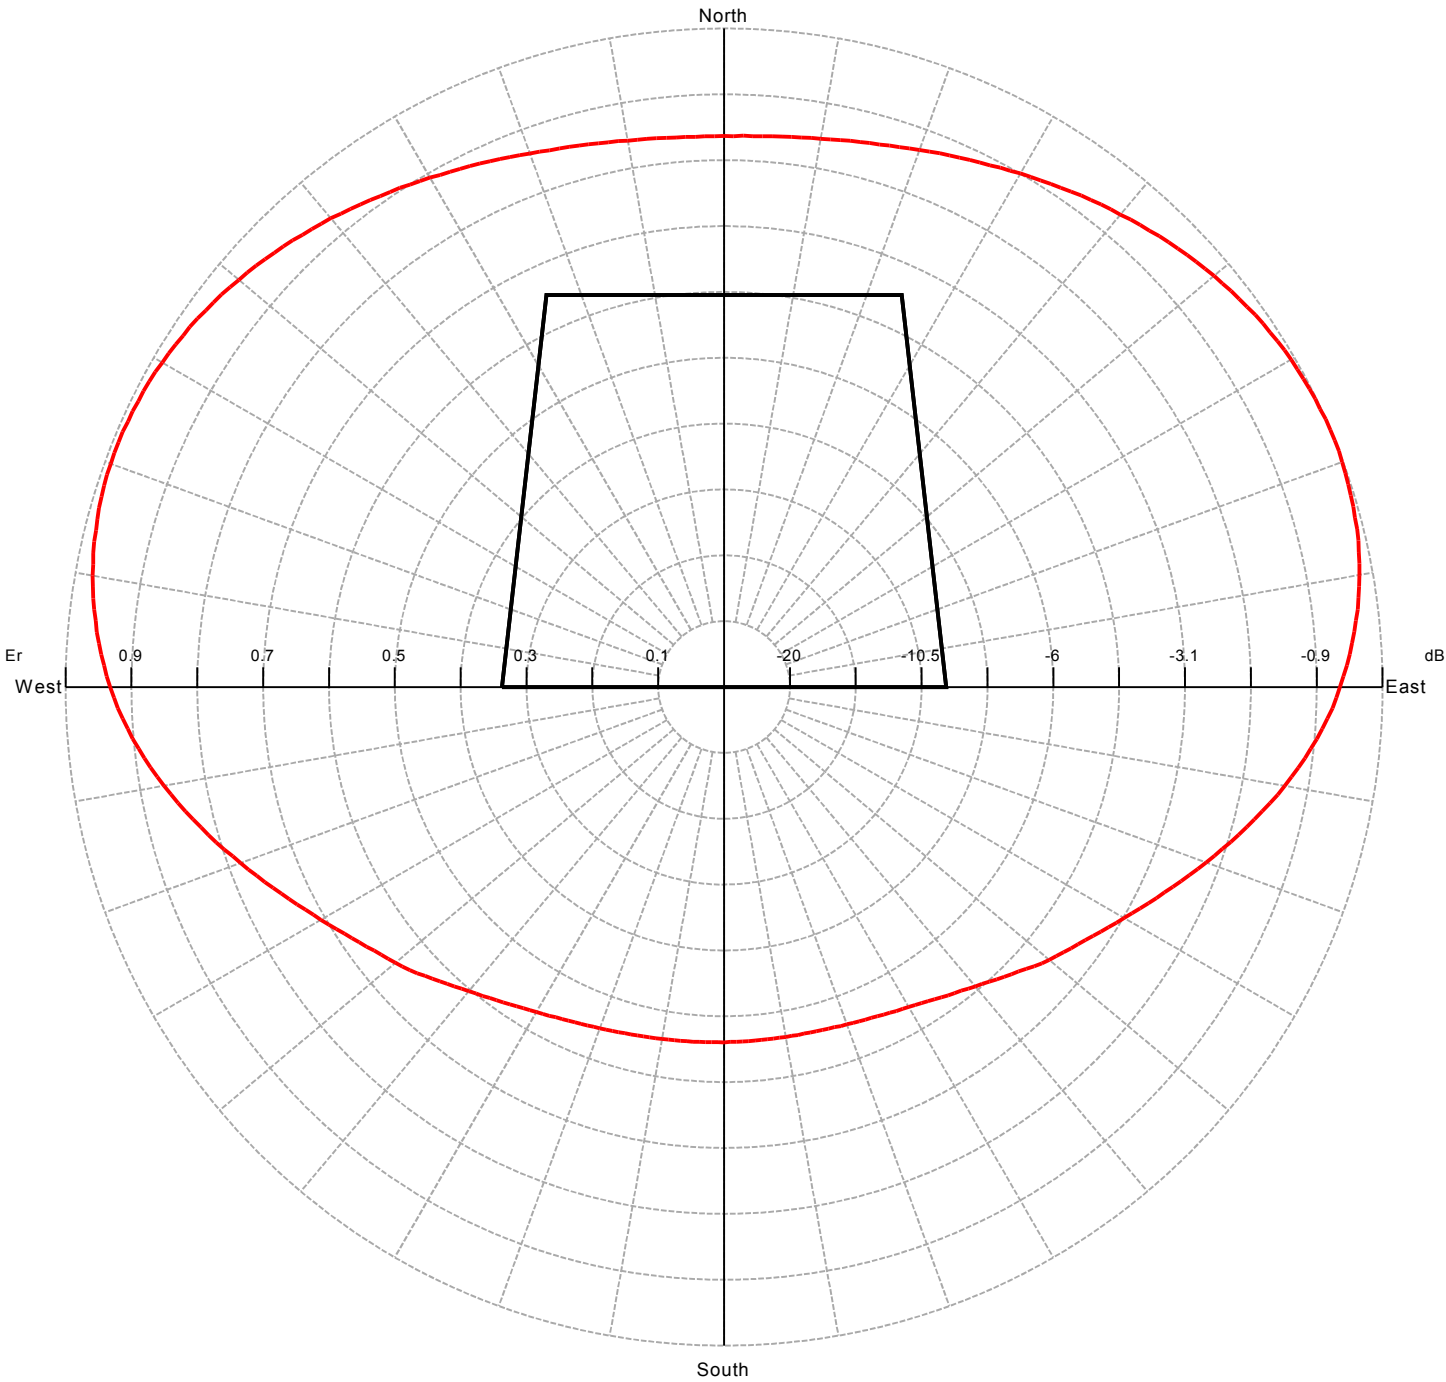

TX station: BROADCAST DEPOT 4

Frequency: 98.00 MHz

Gain solid integration : disabled

Site Name: BROADCAST DEPOT 4

Horizontal diagram at 0.0° depres. (Total Antenna)

Az (°)	Er (%)	ERP (W)	Az (°)	Er (%)	ERP (W)	Az (°)	Er (%)	ERP (W)
0.0	83.7	0.9	60.0	99.4	1.3	120.0	70.2	0.7
1.0	83.7	0.9	61.0	99.5	1.3	121.0	69.5	0.7
2.0	83.8	0.9	62.0	99.7	1.3	122.0	68.8	0.6
3.0	83.8	0.9	63.0	99.8	1.3	123.0	68.2	0.6
4.0	83.8	0.9	64.0	99.9	1.3	124.0	67.6	0.6
5.0	83.9	0.9	65.0	99.9	1.3	125.0	67.0	0.6
6.0	84.0	1.0	66.0	100.0	1.3	126.0	66.5	0.6
7.0	84.1	1.0	67.0	100.0	1.3	127.0	66.0	0.6
8.0	84.2	1.0	68.0	100.0	1.3	128.0	65.4	0.6
9.0	84.4	1.0	69.0	100.0	1.3	129.0	64.9	0.6
10.0	84.5	1.0	70.0	99.9	1.3	130.0	64.5	0.6
11.0	84.7	1.0	71.0	99.8	1.3	131.0	63.9	0.6
12.0	84.9	1.0	72.0	99.7	1.3	132.0	63.3	0.5
13.0	85.1	1.0	73.0	99.5	1.3	133.0	62.8	0.5
14.0	85.3	1.0	74.0	99.4	1.3	134.0	62.2	0.5
15.0	85.5	1.0	75.0	99.2	1.3	135.0	61.7	0.5
16.0	85.7	1.0	76.0	99.1	1.3	136.0	61.2	0.5
17.0	86.0	1.0	77.0	98.9	1.3	137.0	60.7	0.5
18.0	86.2	1.0	78.0	98.5	1.3	138.0	60.2	0.5
19.0	86.5	1.0	79.0	98.3	1.3	139.0	59.7	0.5
20.0	86.8	1.0	80.0	97.9	1.3	140.0	59.3	0.5
21.0	87.1	1.0	81.0	97.6	1.3	141.0	58.9	0.5
22.0	87.4	1.0	82.0	97.3	1.3	142.0	58.5	0.5
23.0	87.7	1.0	83.0	96.9	1.3	143.0	58.2	0.5
24.0	88.0	1.0	84.0	96.5	1.3	144.0	57.9	0.5
25.0	88.3	1.0	85.0	96.1	1.2	145.0	57.5	0.4
26.0	88.6	1.1	86.0	95.6	1.2	146.0	57.2	0.4
27.0	88.9	1.1	87.0	95.2	1.2	147.0	56.9	0.4
28.0	89.3	1.1	88.0	94.6	1.2	148.0	56.6	0.4
29.0	89.6	1.1	89.0	94.1	1.2	149.0	56.3	0.4
30.0	90.1	1.1	90.0	93.5	1.2	150.0	56.1	0.4
31.0	90.4	1.1	91.0	93.0	1.2	151.0	55.9	0.4
32.0	90.7	1.1	92.0	92.4	1.1	152.0	55.7	0.4
33.0	91.1	1.1	93.0	91.8	1.1	153.0	55.5	0.4
34.0	91.4	1.1	94.0	91.1	1.1	154.0	55.3	0.4
35.0	91.8	1.1	95.0	90.4	1.1	155.0	55.1	0.4
36.0	92.3	1.1	96.0	89.6	1.1	156.0	55.0	0.4
37.0	92.6	1.2	97.0	88.9	1.1	157.0	54.9	0.4
38.0	93.0	1.2	98.0	88.1	1.0	158.0	54.8	0.4
39.0	93.3	1.2	99.0	87.3	1.0	159.0	54.6	0.4
40.0	93.6	1.2	100.0	86.4	1.0	160.0	54.5	0.4
41.0	94.1	1.2	101.0	85.6	1.0	161.0	54.4	0.4
42.0	94.4	1.2	102.0	84.8	1.0	162.0	54.3	0.4
43.0	94.7	1.2	103.0	83.9	0.9	163.0	54.3	0.4
44.0	95.2	1.2	104.0	83.0	0.9	164.0	54.2	0.4
45.0	95.5	1.2	105.0	82.2	0.9	165.0	54.1	0.4
46.0	95.8	1.2	106.0	81.3	0.9	166.0	54.1	0.4
47.0	96.2	1.2	107.0	80.5	0.9	167.0	54.0	0.4
48.0	96.5	1.3	108.0	79.6	0.9	168.0	54.0	0.4
49.0	96.8	1.3	109.0	78.8	0.8	169.0	53.9	0.4
50.0	97.2	1.3	110.0	77.9	0.8	170.0	53.9	0.4
51.0	97.4	1.3	111.0	77.0	0.8	171.0	53.9	0.4
52.0	97.7	1.3	112.0	76.2	0.8	172.0	53.9	0.4
53.0	97.9	1.3	113.0	75.4	0.8	173.0	53.9	0.4
54.0	98.2	1.3	114.0	74.6	0.7	174.0	53.9	0.4
55.0	98.5	1.3	115.0	73.8	0.7	175.0	53.9	0.4
56.0	98.7	1.3	116.0	73.1	0.7	176.0	53.9	0.4
57.0	98.9	1.3	117.0	72.3	0.7	177.0	53.9	0.4
58.0	99.1	1.3	118.0	71.5	0.7	178.0	53.9	0.4
59.0	99.3	1.3	119.0	70.8	0.7	179.0	53.9	0.4

TX station: BROADCAST DEPOT 4

Frequency: 98.00 MHz


Gain solid integration : disabled

Site Name: BROADCAST DEPOT 4

Horizontal diagram at 0.0° depres. (Total Antenna)

Az (°)	Er (%)	ERP (W)	Az (°)	Er (%)	ERP (W)	Az (°)	Er (%)	ERP (W)
180.0	54.0	0.4	240.0	70.7	0.7	300.0	98.5	1.3
181.0	54.0	0.4	241.0	71.3	0.7	301.0	98.4	1.3
182.0	54.0	0.4	242.0	72.0	0.7	302.0	98.2	1.3
183.0	54.0	0.4	243.0	72.7	0.7	303.0	97.9	1.3
184.0	54.0	0.4	244.0	73.5	0.7	304.0	97.8	1.3
185.0	54.1	0.4	245.0	74.2	0.7	305.0	97.6	1.3
186.0	54.1	0.4	246.0	75.0	0.8	306.0	97.3	1.3
187.0	54.1	0.4	247.0	75.8	0.8	307.0	97.1	1.3
188.0	54.1	0.4	248.0	76.5	0.8	308.0	96.8	1.3
189.0	54.2	0.4	249.0	77.4	0.8	309.0	96.5	1.3
190.0	54.3	0.4	250.0	78.1	0.8	310.0	96.2	1.2
191.0	54.3	0.4	251.0	78.9	0.8	311.0	95.9	1.2
192.0	54.4	0.4	252.0	79.8	0.9	312.0	95.6	1.2
193.0	54.4	0.4	253.0	80.6	0.9	313.0	95.3	1.2
194.0	54.5	0.4	254.0	81.5	0.9	314.0	95.0	1.2
195.0	54.6	0.4	255.0	82.2	0.9	315.0	94.6	1.2
196.0	54.7	0.4	256.0	83.1	0.9	316.0	94.3	1.2
197.0	54.8	0.4	257.0	84.0	0.9	317.0	93.9	1.2
198.0	54.9	0.4	258.0	84.8	1.0	318.0	93.5	1.2
199.0	55.0	0.4	259.0	85.6	1.0	319.0	93.2	1.2
200.0	55.1	0.4	260.0	86.4	1.0	320.0	92.9	1.2
201.0	55.3	0.4	261.0	87.2	1.0	321.0	92.5	1.2
202.0	55.5	0.4	262.0	88.0	1.0	322.0	92.2	1.1
203.0	55.6	0.4	263.0	88.7	1.1	323.0	91.7	1.1
204.0	55.7	0.4	264.0	89.4	1.1	324.0	91.4	1.1
205.0	55.9	0.4	265.0	90.2	1.1	325.0	91.0	1.1
206.0	56.1	0.4	266.0	90.8	1.1	326.0	90.7	1.1
207.0	56.3	0.4	267.0	91.4	1.1	327.0	90.4	1.1
208.0	56.5	0.4	268.0	92.1	1.1	328.0	89.9	1.1
209.0	56.7	0.4	269.0	92.7	1.2	329.0	89.6	1.1
210.0	57.0	0.4	270.0	93.2	1.2	330.0	89.3	1.1
211.0	57.3	0.4	271.0	93.8	1.2	331.0	88.9	1.1
212.0	57.5	0.4	272.0	94.2	1.2	332.0	88.6	1.1
213.0	57.8	0.4	273.0	94.7	1.2	333.0	88.3	1.0
214.0	58.1	0.5	274.0	95.2	1.2	334.0	88.0	1.0
215.0	58.5	0.5	275.0	95.6	1.2	335.0	87.7	1.0
216.0	58.8	0.5	276.0	95.9	1.2	336.0	87.4	1.0
217.0	59.1	0.5	277.0	96.4	1.3	337.0	87.1	1.0
218.0	59.5	0.5	278.0	96.7	1.3	338.0	86.8	1.0
219.0	59.9	0.5	279.0	97.1	1.3	339.0	86.5	1.0
220.0	60.3	0.5	280.0	97.4	1.3	340.0	86.2	1.0
221.0	60.7	0.5	281.0	97.6	1.3	341.0	86.0	1.0
222.0	61.2	0.5	282.0	97.9	1.3	342.0	85.7	1.0
223.0	61.6	0.5	283.0	98.2	1.3	343.0	85.5	1.0
224.0	62.1	0.5	284.0	98.3	1.3	344.0	85.3	1.0
225.0	62.6	0.5	285.0	98.5	1.3	345.0	85.1	1.0
226.0	63.1	0.5	286.0	98.7	1.3	346.0	84.9	1.0
227.0	63.7	0.5	287.0	98.9	1.3	347.0	84.7	1.0
228.0	64.2	0.6	288.0	99.0	1.3	348.0	84.5	1.0
229.0	64.7	0.6	289.0	99.1	1.3	349.0	84.4	1.0
230.0	65.1	0.6	290.0	99.1	1.3	350.0	84.2	1.0
231.0	65.6	0.6	291.0	99.2	1.3	351.0	84.1	1.0
232.0	66.1	0.6	292.0	99.2	1.3	352.0	84.0	1.0
233.0	66.5	0.6	293.0	99.2	1.3	353.0	83.9	0.9
234.0	67.1	0.6	294.0	99.1	1.3	354.0	83.8	0.9
235.0	67.6	0.6	295.0	99.1	1.3	355.0	83.8	0.9
236.0	68.2	0.6	296.0	99.0	1.3	356.0	83.8	0.9
237.0	68.8	0.6	297.0	99.0	1.3	357.0	83.7	0.9
238.0	69.4	0.6	298.0	98.9	1.3	358.0	83.7	0.9
239.0	70.0	0.7	299.0	98.7	1.3	359.0	83.7	0.9

Vertical diagram at an azimuth of 64.6° degrees

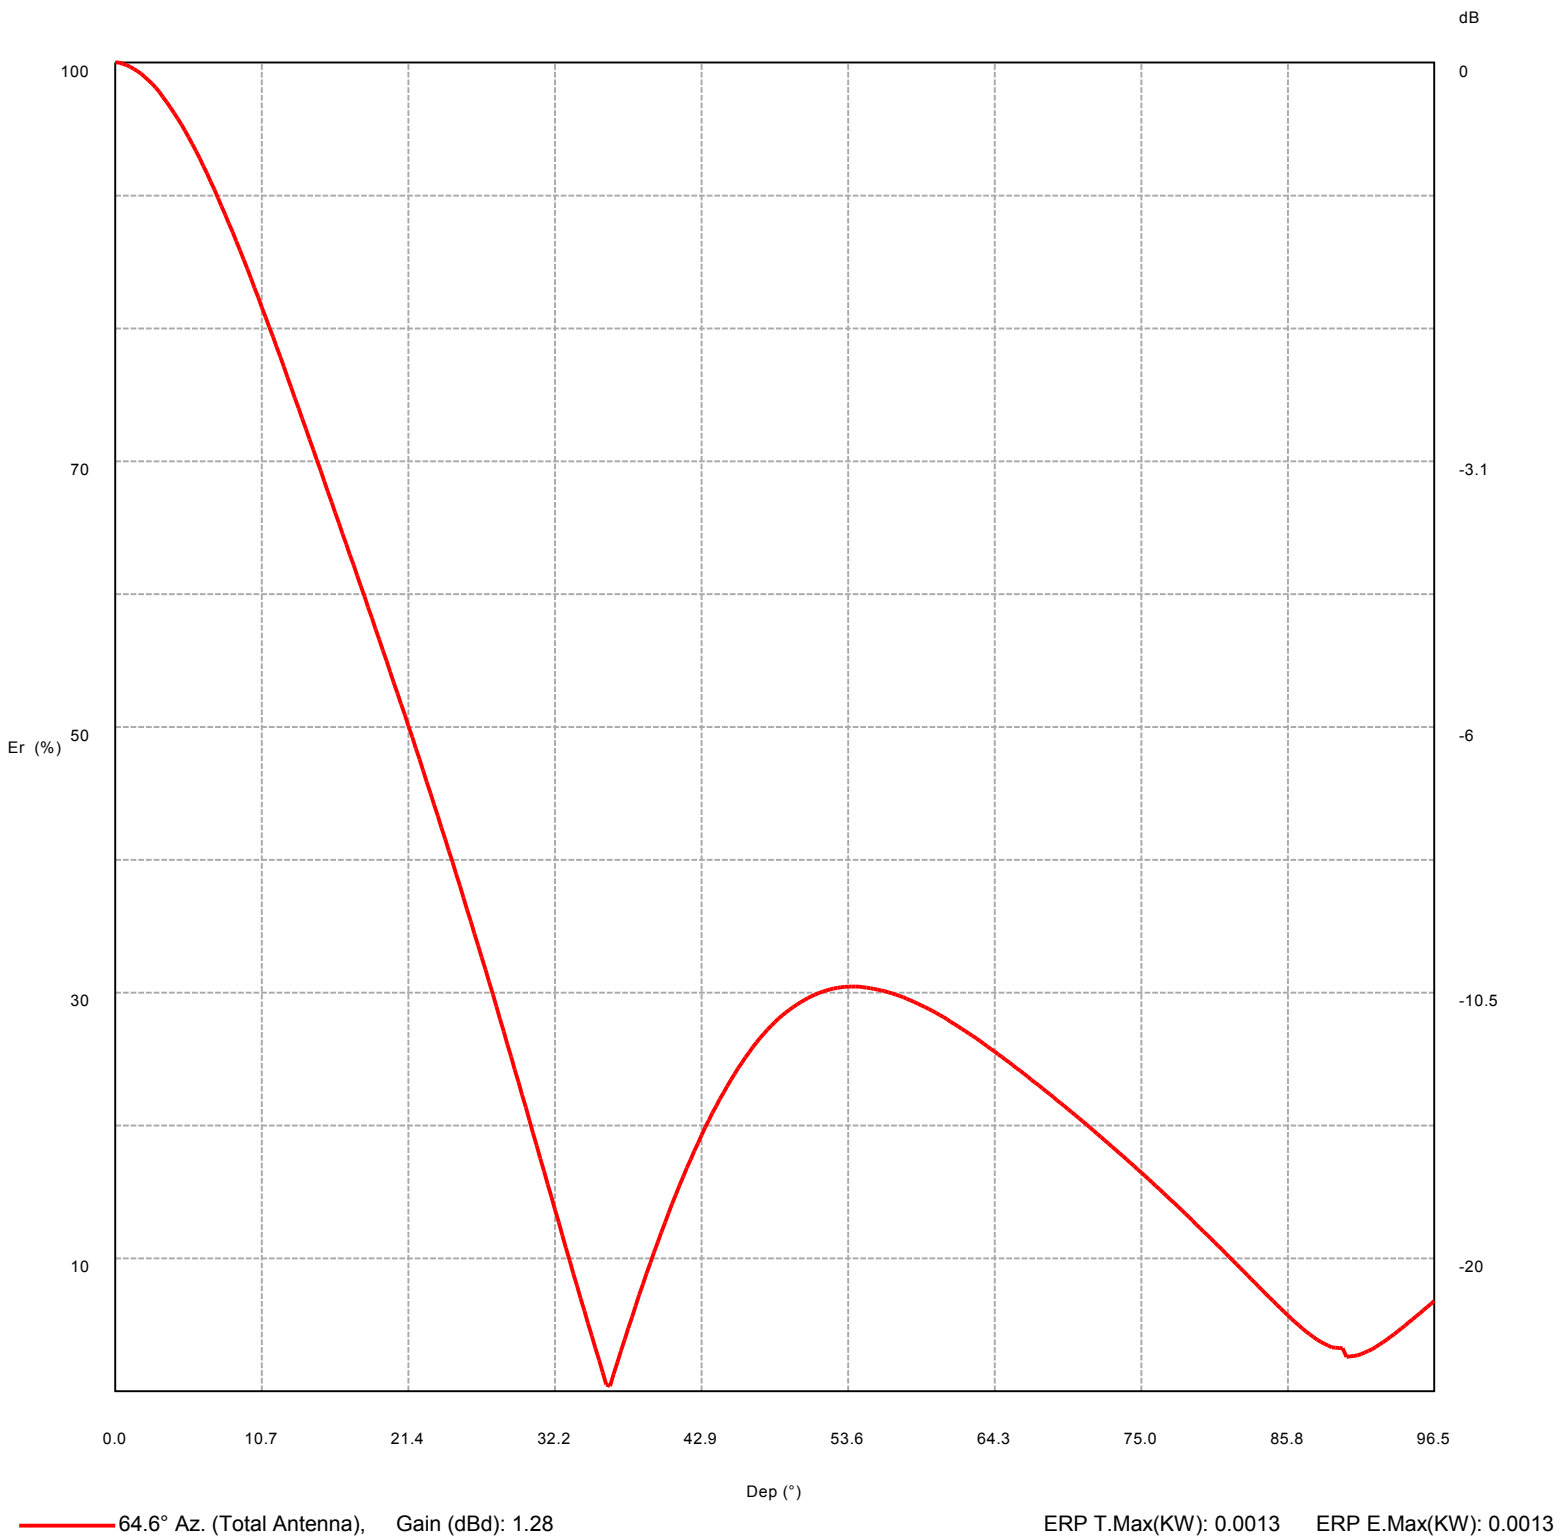

TX station: BROADCAST DEPOT 4

Frequency: 98.00 MHz

Gain solid integration : disabled

Site Name: BROADCAST DEPOT 4

Vertical diagram at an azimuth of 64.6° degrees

Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)
0.0	100.1	1.3	16.1	66.1	0.6	32.2	13.7	0.0
0.3	100.0	1.3	16.3	65.3	0.6	32.4	12.7	0.0
0.5	99.9	1.3	16.6	64.5	0.6	32.7	11.7	0.0
0.8	99.8	1.3	16.9	63.7	0.5	33.0	10.8	0.0
1.1	99.7	1.3	17.2	63.0	0.5	33.2	9.8	0.0
1.3	99.5	1.3	17.4	62.2	0.5	33.5	8.9	0.0
1.6	99.4	1.3	17.7	61.4	0.5	33.8	7.9	0.0
1.9	99.2	1.3	18.0	60.6	0.5	34.0	7.0	0.0
2.1	98.9	1.3	18.2	59.8	0.5	34.3	6.0	0.0
2.4	98.7	1.3	18.5	59.0	0.5	34.6	5.1	0.0
2.7	98.4	1.3	18.8	58.2	0.5	34.8	4.2	0.0
2.9	98.1	1.3	19.0	57.4	0.4	35.1	3.2	0.0
3.2	97.8	1.3	19.3	56.6	0.4	35.4	2.3	0.0
3.5	97.4	1.3	19.6	55.8	0.4	35.6	1.4	0.0
3.8	97.0	1.3	19.8	54.9	0.4	35.9	0.5	0.0
4.0	96.6	1.3	20.1	54.1	0.4	36.2	0.4	0.0
4.3	96.2	1.2	20.4	53.3	0.4	36.4	1.3	0.0
4.6	95.8	1.2	20.6	52.5	0.4	36.7	2.2	0.0
4.8	95.3	1.2	20.9	51.7	0.4	37.0	3.0	0.0
5.1	94.9	1.2	21.2	50.9	0.3	37.3	3.9	0.0
5.4	94.4	1.2	21.4	50.1	0.3	37.5	4.8	0.0
5.6	93.9	1.2	21.7	49.2	0.3	37.8	5.6	0.0
5.9	93.4	1.2	22.0	48.4	0.3	38.1	6.4	0.0
6.2	92.8	1.2	22.2	47.6	0.3	38.3	7.3	0.0
6.4	92.2	1.1	22.5	46.7	0.3	38.6	8.1	0.0
6.7	91.6	1.1	22.8	45.9	0.3	38.9	8.9	0.0
7.0	91.0	1.1	23.0	45.0	0.3	39.1	9.7	0.0
7.2	90.4	1.1	23.3	44.2	0.3	39.4	10.4	0.0
7.5	89.8	1.1	23.6	43.3	0.3	39.7	11.2	0.0
7.8	89.2	1.1	23.9	42.4	0.2	39.9	11.9	0.0
8.0	88.5	1.1	24.1	41.6	0.2	40.2	12.7	0.0
8.3	87.9	1.0	24.4	40.7	0.2	40.5	13.4	0.0
8.6	87.2	1.0	24.7	39.8	0.2	40.7	14.1	0.0
8.8	86.6	1.0	24.9	38.9	0.2	41.0	14.8	0.0
9.1	85.9	1.0	25.2	38.0	0.2	41.3	15.5	0.0
9.4	85.2	1.0	25.5	37.2	0.2	41.5	16.2	0.0
9.6	84.5	1.0	25.7	36.3	0.2	41.8	16.8	0.0
9.9	83.8	0.9	26.0	35.4	0.2	42.1	17.4	0.0
10.2	83.0	0.9	26.3	34.5	0.2	42.3	18.1	0.0
10.5	82.3	0.9	26.5	33.5	0.2	42.6	18.7	0.0
10.7	81.6	0.9	26.8	32.6	0.1	42.9	19.3	0.0
11.0	80.8	0.9	27.1	31.7	0.1	43.1	19.9	0.1
11.3	80.1	0.9	27.3	30.8	0.1	43.4	20.4	0.1
11.5	79.4	0.8	27.6	29.9	0.1	43.7	21.0	0.1
11.8	78.6	0.8	27.9	29.0	0.1	44.0	21.5	0.1
12.1	77.9	0.8	28.1	28.0	0.1	44.2	22.0	0.1
12.3	77.1	0.8	28.4	27.1	0.1	44.5	22.5	0.1
12.6	76.3	0.8	28.7	26.1	0.1	44.8	23.0	0.1
12.9	75.5	0.8	28.9	25.2	0.1	45.0	23.4	0.1
13.1	74.8	0.7	29.2	24.2	0.1	45.3	23.9	0.1
13.4	74.0	0.7	29.5	23.3	0.1	45.6	24.3	0.1
13.7	73.2	0.7	29.7	22.3	0.1	45.8	24.7	0.1
13.9	72.4	0.7	30.0	21.4	0.1	46.1	25.1	0.1
14.2	71.6	0.7	30.3	20.4	0.1	46.4	25.5	0.1
14.5	70.9	0.7	30.6	19.4	0.1	46.6	25.9	0.1
14.7	70.1	0.7	30.8	18.5	0.0	46.9	26.3	0.1
15.0	69.3	0.6	31.1	17.5	0.0	47.2	26.6	0.1
15.3	68.5	0.6	31.4	16.6	0.0	47.4	26.9	0.1
15.5	67.7	0.6	31.6	15.6	0.0	47.7	27.2	0.1
15.8	66.9	0.6	31.9	14.6	0.0	48.0	27.5	0.1

TX station: BROADCAST DEPOT 4

Frequency: 98.00 MHz

Gain solid integration : disabled

Site Name: BROADCAST DEPOT 4

Vertical diagram at an azimuth of 64.6° degrees

Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)
48.2	27.8	0.1	64.3	25.6	0.1	80.4	11.2	0.0
48.5	28.0	0.1	64.6	25.4	0.1	80.7	10.9	0.0
48.8	28.3	0.1	64.9	25.2	0.1	80.9	10.7	0.0
49.0	28.5	0.1	65.1	24.9	0.1	81.2	10.4	0.0
49.3	28.7	0.1	65.4	24.7	0.1	81.5	10.1	0.0
49.6	28.9	0.1	65.7	24.5	0.1	81.7	9.8	0.0
49.8	29.1	0.1	65.9	24.3	0.1	82.0	9.6	0.0
50.1	29.3	0.1	66.2	24.1	0.1	82.3	9.3	0.0
50.4	29.4	0.1	66.5	23.9	0.1	82.5	9.0	0.0
50.7	29.6	0.1	66.7	23.7	0.1	82.8	8.7	0.0
50.9	29.7	0.1	67.0	23.4	0.1	83.1	8.4	0.0
51.2	29.9	0.1	67.3	23.2	0.1	83.3	8.2	0.0
51.5	30.0	0.1	67.5	23.0	0.1	83.6	7.9	0.0
51.7	30.1	0.1	67.8	22.8	0.1	83.9	7.6	0.0
52.0	30.2	0.1	68.1	22.6	0.1	84.2	7.3	0.0
52.3	30.2	0.1	68.3	22.4	0.1	84.4	7.1	0.0
52.5	30.3	0.1	68.6	22.1	0.1	84.7	6.8	0.0
52.8	30.4	0.1	68.9	21.9	0.1	85.0	6.5	0.0
53.1	30.4	0.1	69.1	21.7	0.1	85.2	6.2	0.0
53.3	30.4	0.1	69.4	21.5	0.1	85.5	6.0	0.0
53.6	30.5	0.1	69.7	21.2	0.1	85.8	5.7	0.0
53.9	30.5	0.1	69.9	21.0	0.1	86.0	5.5	0.0
54.1	30.5	0.1	70.2	20.8	0.1	86.3	5.2	0.0
54.4	30.4	0.1	70.5	20.5	0.1	86.6	5.0	0.0
54.7	30.4	0.1	70.8	20.3	0.1	86.8	4.7	0.0
54.9	30.4	0.1	71.0	20.1	0.1	87.1	4.5	0.0
55.2	30.3	0.1	71.3	19.9	0.1	87.4	4.3	0.0
55.5	30.3	0.1	71.6	19.6	0.1	87.6	4.1	0.0
55.7	30.2	0.1	71.8	19.4	0.1	87.9	3.9	0.0
56.0	30.2	0.1	72.1	19.1	0.0	88.2	3.7	0.0
56.3	30.1	0.1	72.4	18.9	0.0	88.4	3.6	0.0
56.5	30.0	0.1	72.6	18.7	0.0	88.7	3.4	0.0
56.8	29.9	0.1	72.9	18.4	0.0	89.0	3.3	0.0
57.1	29.8	0.1	73.2	18.2	0.0	89.2	3.3	0.0
57.4	29.8	0.1	73.4	17.9	0.0	89.5	3.2	0.0
57.6	29.6	0.1	73.7	17.7	0.0	89.8	3.2	0.0
57.9	29.5	0.1	74.0	17.5	0.0	90.0	2.6	0.0
58.2	29.4	0.1	74.2	17.2	0.0	90.3	2.6	0.0
58.4	29.3	0.1	74.5	17.0	0.0	90.6	2.7	0.0
58.7	29.2	0.1	74.8	16.7	0.0	90.9	2.7	0.0
59.0	29.0	0.1	75.0	16.5	0.0	91.1	2.8	0.0
59.2	28.9	0.1	75.3	16.2	0.0	91.4	2.9	0.0
59.5	28.8	0.1	75.6	16.0	0.0	91.7	3.0	0.0
59.8	28.6	0.1	75.8	15.7	0.0	91.9	3.2	0.0
60.0	28.5	0.1	76.1	15.4	0.0	92.2	3.3	0.0
60.3	28.3	0.1	76.4	15.2	0.0	92.5	3.5	0.0
60.6	28.2	0.1	76.6	14.9	0.0	92.7	3.7	0.0
60.8	28.0	0.1	76.9	14.7	0.0	93.0	3.9	0.0
61.1	27.8	0.1	77.2	14.4	0.0	93.3	4.1	0.0
61.4	27.6	0.1	77.5	14.2	0.0	93.5	4.3	0.0
61.6	27.5	0.1	77.7	13.9	0.0	93.8	4.5	0.0
61.9	27.3	0.1	78.0	13.6	0.0	94.1	4.7	0.0
62.2	27.1	0.1	78.3	13.4	0.0	94.3	4.9	0.0
62.4	26.9	0.1	78.5	13.1	0.0	94.6	5.2	0.0
62.7	26.7	0.1	78.8	12.8	0.0	94.9	5.4	0.0
63.0	26.5	0.1	79.1	12.6	0.0	95.1	5.6	0.0
63.2	26.4	0.1	79.3	12.3	0.0	95.4	5.9	0.0
63.5	26.2	0.1	79.6	12.0	0.0	95.7	6.1	0.0
63.8	26.0	0.1	79.9	11.8	0.0	95.9	6.3	0.0
64.1	25.7	0.1	80.1	11.5	0.0	96.2	6.6	0.0