


Exhibit 12.2

Vertical Plan of Antenna System

The site is located northeast of the intersection of CR19 and CR20, Goshen, Elkhart County, Indiana.	<u>Site Location (NAD 27)</u> NL: 41° 38' 21" WL: 85° 51' 32"
------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------

NOTE: Existing Silo Structure

No Antenna Structure Registration Required.

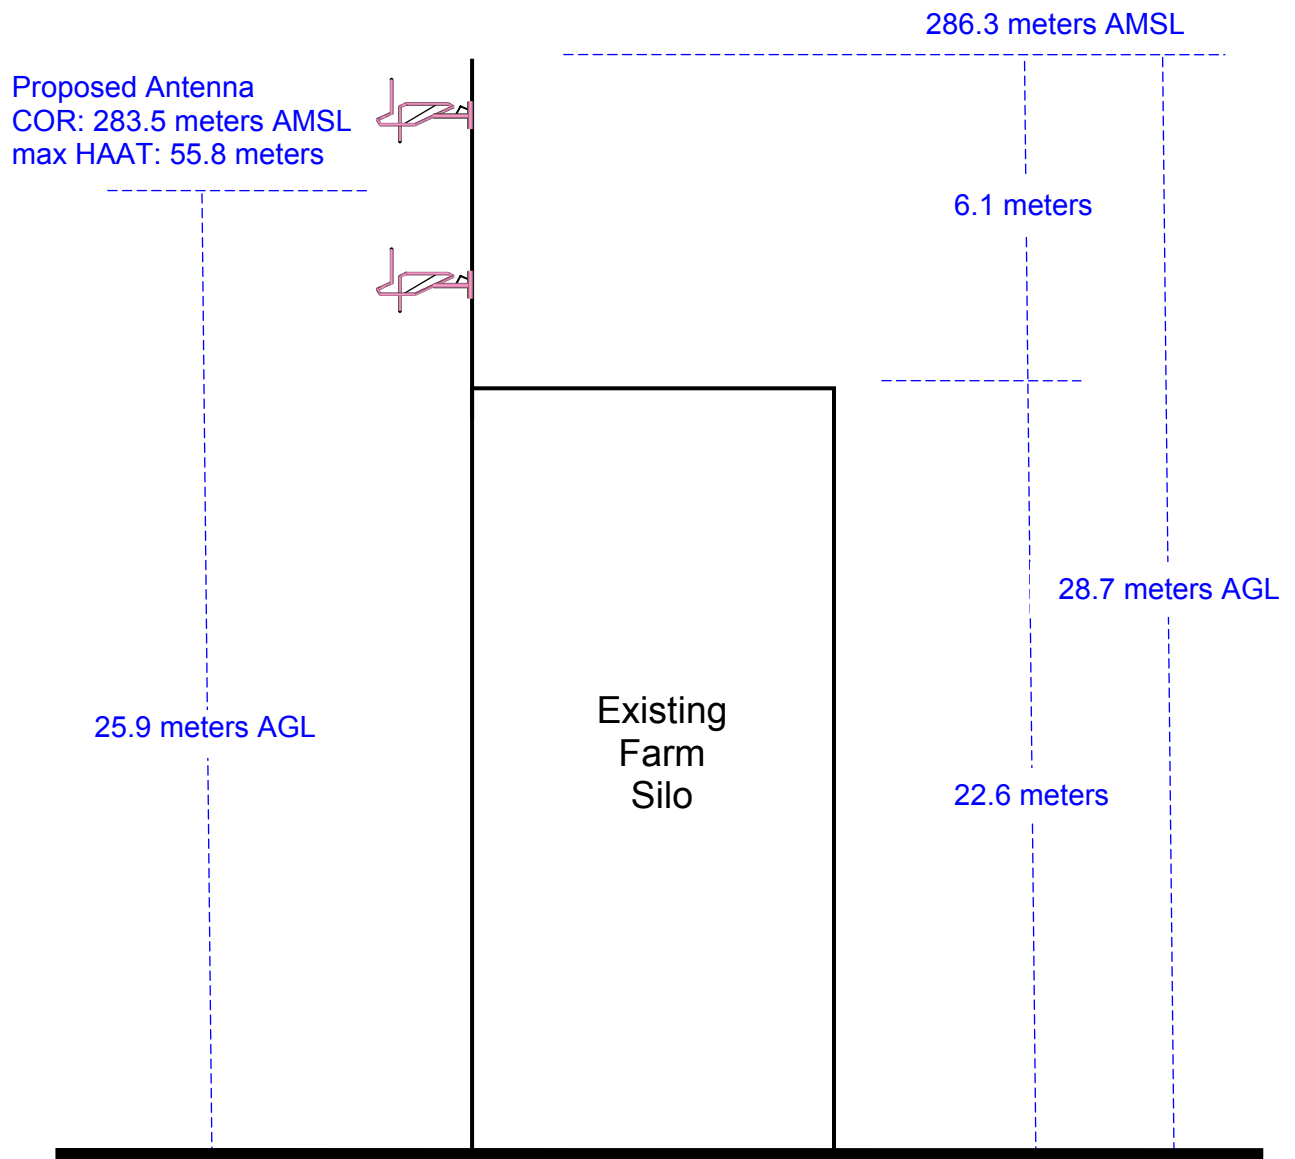

Ground Elevation = 257.6 m AMSL
Drawing is not to Scale

MUNN-REESE, INC.
Broadcast Engineering Consultants
Coldwater, MI 49036

W293AZ.P

Proposed
Elkhart IN
Latitude: 41-38-21 N
Longitude: 085-51-32 W
ERP: 0.08 kW
Channel: 293
Frequency: 106.5 MHz
AMSL Height: 283.5 m
Elevation: 257.6 m
Horiz. Pattern: Omni
Vert. Pattern: No
Prop Model: None


60 dBu Contour
Total Population: 30,705
Total Area: 118.59 km²

W293AZ.L

BLFT20070912ACH
Elkhart IN
Latitude: 41-35-16 N
Longitude: 085-50-02 W
ERP: 0.25 kW
Channel: 293
Frequency: 106.5 MHz
AMSL Height: 264.0 m
Elevation: 243.0 m
Horiz. Pattern: Omni
Vert. Pattern: No
Prop Model: None

60 dBu Contour
Total Population: 40,183
Total Area: 158.12 km²

■ W293AZ.L
■ W293AZ.P

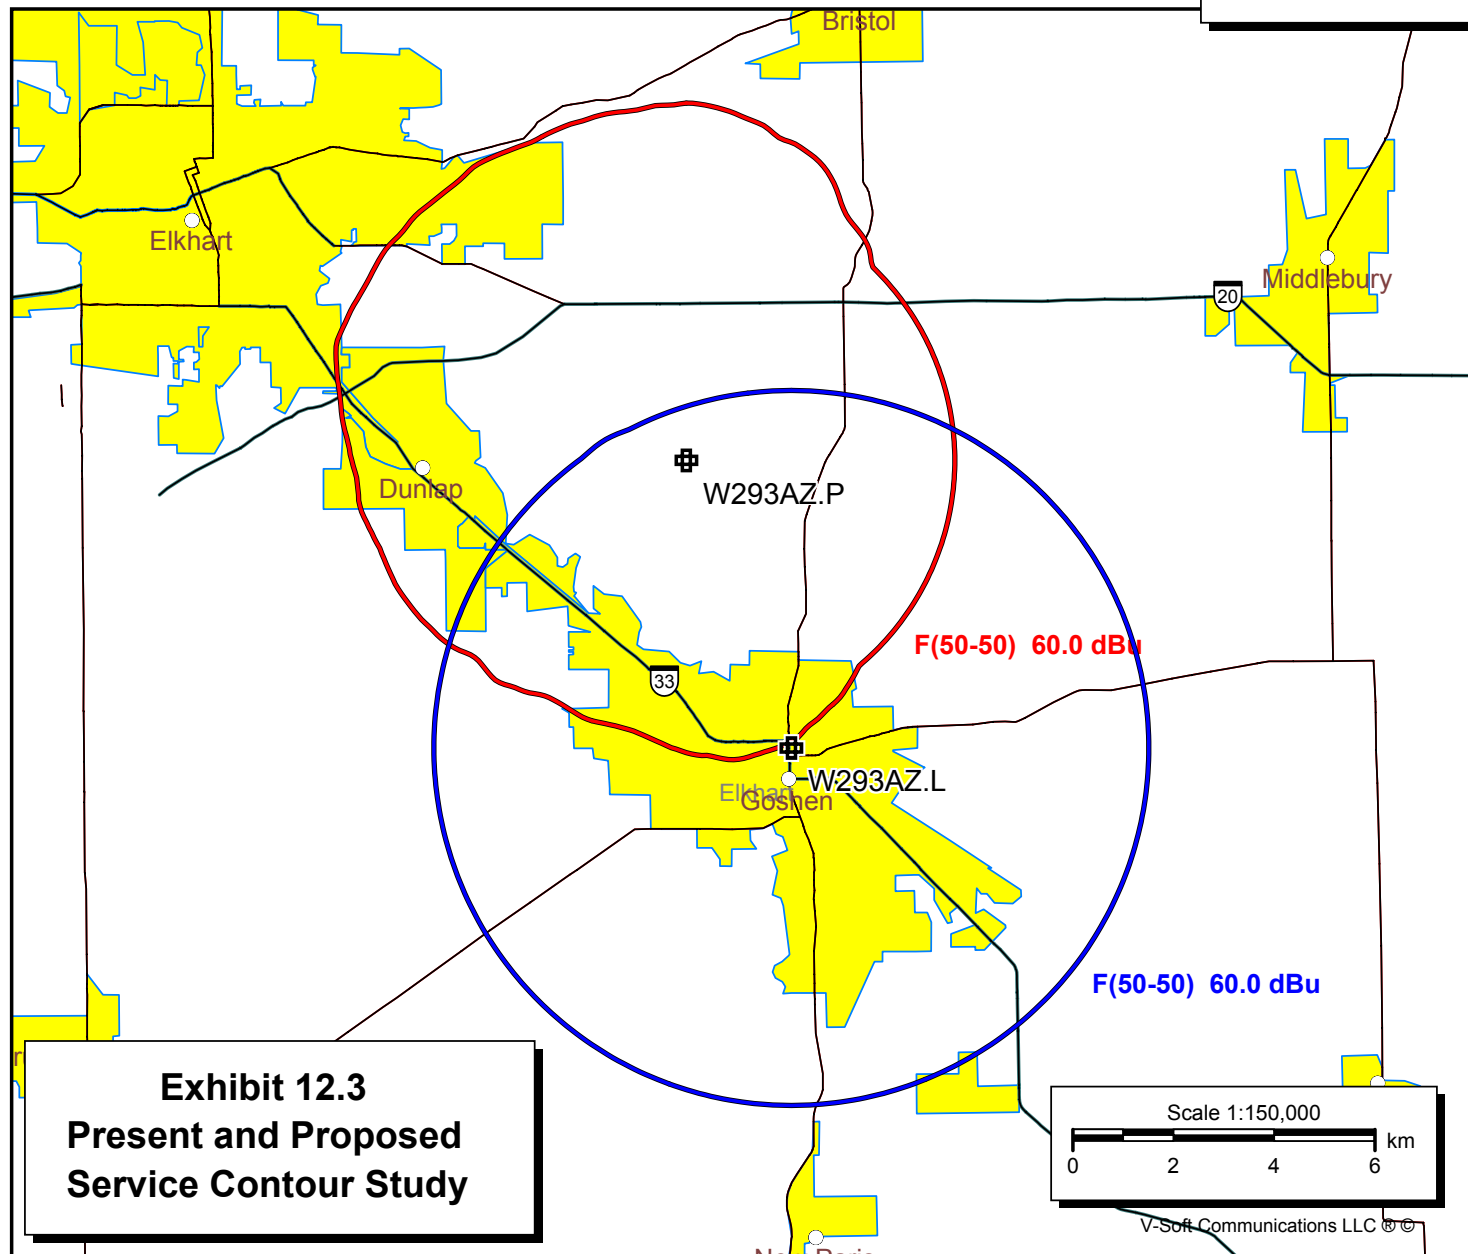

W293AZ.P
 Proposed
 Elkhart IN
 Latitude: 41-38-21 N
 Longitude: 085-51-32 W
 ERP: 0.08 kW
 Channel: 293
 Frequency: 106.5 MHz
 AMSL Height: 283.5 m
 Elevation: 257.6 m
 Horiz. Pattern: Omni
 Vert. Pattern: No
 Prop Model: None

WSBL-LP
 BLL20020920AAG
 South Bend IN
 Latitude: 41-40-24 N
 Longitude: 086-16-46 W
 ERP: 0.10 kW
 Channel: 251
 Frequency: 98.1 MHz
 AMSL Height: 242.7 m
 Elevation: 218.0 m
 Horiz. Pattern: Omni
 Vert. Pattern: No
 Prop Model: None

■ W293AZ.P
 ■ WSBL-LP

Exhibit 12.4 Proposed vs. Primary Service Contour Study

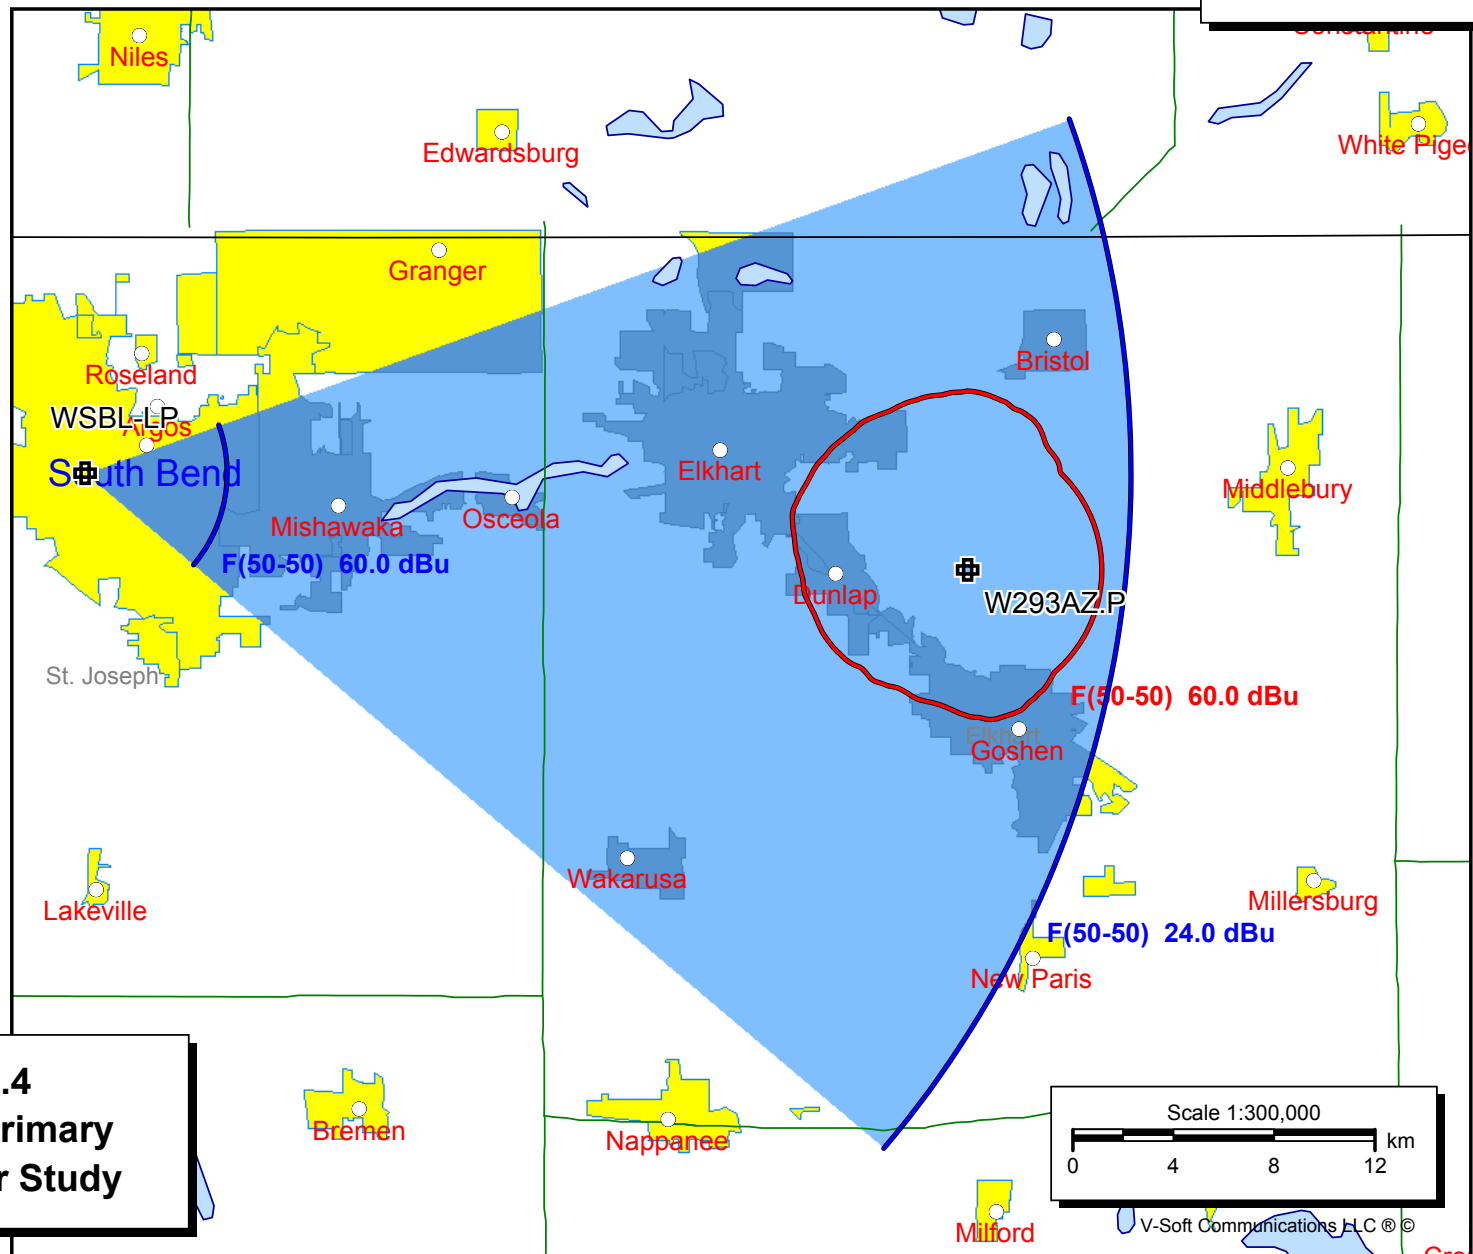


Exhibit 12.5

Tabulation of Proposed Allocation

J. Ramon Ruvalcaba
W293AZ - Proposed Site - Elkhart, IN

REFERENCE CH# 293D - 106.5 MHz, Pwr= 0.08 kW, HAAT= 37.5 M, COR= 283.5 M DISPLAY DATES
41 38 21.0 N. Average Protected F(50-50)= 5.9 km DATA 05-10-08
85 51 32.0 W. Omni-directional SEARCH 05-15-08

CH CITY	CALL	TYPE STATE	ANT STATE	AZI. <--	DIST FILE #	LAT. LNG.	Pwr(kW) HAAT(M)	INT(km) COR(M)	PRO(km) LICENSEE	*OUT* (Overlap in km)
293B Kalamazoo	WVFM	LIC MI	NCX	18.2 198.5	98.01 BLH20060726ANY	42 28 35.0 85 29 05.0	33.000 183	132.1 452	64.3 Midwest Communications, In	1.84
293D Elkhart	W293AZ	LIC IN	C	160.0 340.0	6.08 BLFT20070912ACH	41 35 16.0 85 50 02.0	0.250	23.8 264	7.1 J. Ramon Ruvalcaba	-20.83*
292A South Bend	WUBU	CP IN	ZCX	277.3 97.1	33.02 BPH20040825AAG	41 40 35.0 86 15 08.0	3.000 92	28.2 323	19.2 Partnership Radio, Llc	3.94
292A South Bend	WUBU	LIC IN	ZCN	277.4 97.1	33.03 BLH19921016KA	41 40 36.0 86 15 08.0	3.000 89	19.7 320	13.1 Partnership Radio, Llc	9.98
292D Middlebury	W292DO	LIC IN	V	78.1 258.3	26.54 BLFT20080221ABY	41 41 16.0 85 32 49.0	0.129	8.6 284	6.0 Progressive Broadcasting S	13.00
292A Columbia City	WVBB	LIC IN	ZCX	130.6 311.0	72.51 BLH20040108AML	41 12 49.0 85 12 04.0	5.600 104	41.6 360	27.0 Oasis Radio 2 Corp.	37.98
295D Three Rivers	W295AK	CP MI	C	29.6 209.8	37.04 BMPFT20070329AFB	41 55 43.0 85 38 15.0	0.004	0.1 331	4.2 Horizon Christian Fellowsh	32.26
293D Rochester	W293AL	CP IN	C	208.9 28.6	66.33 BPFT20080229AAV	41 06 58.0 86 14 30.0	0.013	22.8 366	6.8 Csn International	41.70
291D Plymouth	W291BQ	LIC IN	V	219.4 39.2	44.94 BLFT20070926AJU	41 19 35.0 86 12 01.0	0.099	0.7 275	5.6 Progressive Broadcasting S	38.69
294A Hicksville	WFGA	CP OH	CX	105.8 286.4	86.74 BPH20070501AFB	41 25 24.0 84 51 36.0	2.800 150	42.0 413	27.6 Fallen Timbers Communicati	51.56
296A St. Joseph	WIRX	LIC MI	CN	318.8 138.5	64.15 BLH19901010KE	42 04 19.0 86 22 14.0	1.200 152	1.9 359	22.8 Wsjm, Inc.	40.70
293D Rochester	W293AL	LIC IN	C	205.1 24.9	70.15 BLFT20070601AKG	41 04 01.0 86 12 50.0	0.080	20.5 277	6.2 Csn International	46.11
295B Marion	WXXC	LIC IN	CN	171.6 351.7	116.90 BLH19830418AS	40 35 52.0 85 39 21.0	50.000 152	6.0 408	65.4 Mid-america Radio Of India	50.25
GRANDFATHERED AT 50KW@152M HAAT										
293B Greenville	WDSJ	LIC OH	CN	147.3 328.1	196.31 BLH19901105KD	40 08 49.0 84 36 36.0	50.000 146	137.6 460	65.0 Citicasters Licenses, L.p.	104.71
294L1 Three Oaks	WRHC-LP	LIC MI		286.3 105.8	65.40 BLL20051122AAA	41 48 04.0 86 36 52.0	0.053 41	1.7 244	1.6 Harbor Arts	53.37
294A Hicksville	WFGA	LIC OH	CX	110.1 290.8	101.47 BLH20020125ABF	41 19 16.0 84 43 12.0	2.850 147	40.4 378	26.6 Fallen Timbers Communicati	67.34
291D Benton Harbor	633834	APP MI	C	317.9 137.6	67.13 BNPFT20030314AYR	42 05 09.0 86 24 13.0	0.120	0.8 224	5.9 Family Life Broadcasting S	60.61

Terrain database is NGDC 30 SEC Distance + R = 73.215 or FCC spacings in KM, Distance + M = Margin in KM
Contour distances are on direct line to and from reference station. Reference Zone = 1. With 3rd Adj Channels.
Ant Column: (D= DA Standard, Z= DA 73.215, N= Not DA 73.215, _= Omni), Polarization (C,H,V,E), Beamtilt(Y,N,X)
Incoming contour overlap is ignored.

***affixed to 'IN' or 'OUT' values = site inside protected contour.

"<" = Contour Overlap

Reference station has protected zone issue: Canada

MUNN-REESE, INC.
Broadcast Engineering Consultants
Coldwater, MI 49036

Exhibit 12.6

Contour Protection Studies Toward Select Station(s)

J. Ramon Ruvalcaba

W293AZ - Proposed Site - Elkhart, IN

FMCommander Single Allocation Study

05-15-2008

W293AZ CH 293 D
0.08 kW 283.5 M COR
Prot. = 60 dBu
Intef. = 34 dBu

WVFM CH 293 B BLH20060726ANY
33.0 kW, 452 M COR
Prot. = 54 dBu
Intef. = 40 dBu

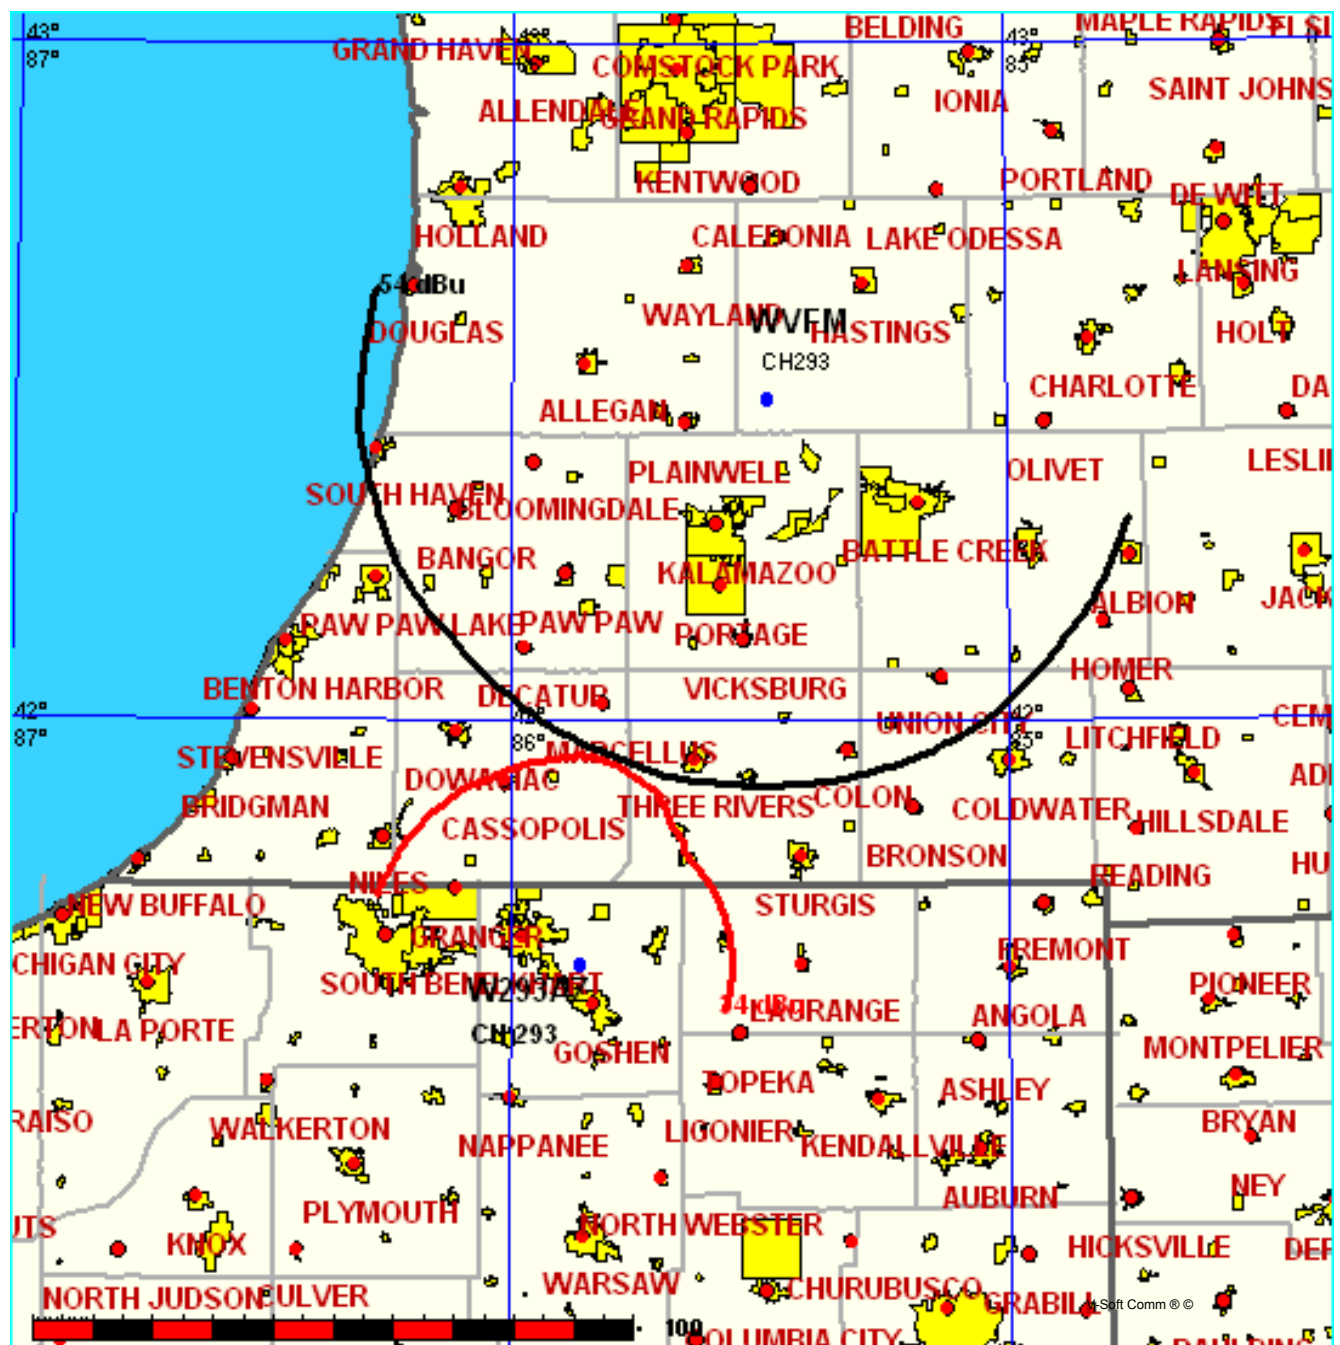


Exhibit 12.6

Contour Protection Studies Toward Select Station(s)

05-15-2008 NGDC 30 SEC Terrain Data

WVFM BLH20060726ANY
 Channel = 293B
 Max ERP = 33 kW
 RCAMSL = 452 M
 N. Lat. 42 28 35.0
 W. Lng. 85 29 05.0
 Protected
 54 dBu

W293AZ
 Channel = 293D
 Max ERP = 0.08 kW
 RCAMSL = 283.5 M
 N. Lat. 41 38 21.0
 W. Lng. 85 51 32.0
 Interfering
 34 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
138.0	033.0000	0174.3	063.9	058.1	000.0800	0020.4	086.9	17.69
139.0	033.0000	0174.5	063.9	058.2	000.0800	0020.4	085.8	17.91
140.0	033.0000	0174.8	064.0	058.3	000.0800	0020.4	084.7	18.14
141.0	033.0000	0175.4	064.0	058.5	000.0800	0020.3	083.6	18.36
142.0	033.0000	0176.2	064.1	058.6	000.0800	0020.3	082.5	18.59
143.0	033.0000	0177.0	064.2	058.8	000.0800	0020.3	081.4	18.81
144.0	033.0000	0177.4	064.2	058.9	000.0800	0020.2	080.3	19.03
145.0	033.0000	0177.6	064.3	059.0	000.0800	0020.2	079.2	19.25
146.0	033.0000	0177.7	064.3	059.0	000.0800	0020.2	078.1	19.47
147.0	033.0000	0178.0	064.3	059.1	000.0800	0020.2	076.9	19.68
148.0	033.0000	0178.0	064.3	059.1	000.0800	0020.2	075.8	19.89
149.0	033.0000	0177.9	064.3	059.1	000.0800	0020.2	074.7	20.10
150.0	033.0000	0177.8	064.3	059.1	000.0800	0020.2	073.6	20.30
151.0	033.0000	0177.5	064.2	059.1	000.0800	0020.2	072.4	20.51
152.0	033.0000	0177.2	064.2	059.0	000.0800	0020.2	071.3	20.71
153.0	033.0000	0177.1	064.2	059.0	000.0800	0020.2	070.2	20.91
154.0	033.0000	0177.3	064.2	058.9	000.0800	0020.2	069.1	21.11
155.0	033.0000	0177.5	064.3	058.8	000.0800	0020.2	068.0	21.31
156.0	033.0000	0177.8	064.3	058.8	000.0800	0020.3	066.8	21.52
157.0	033.0000	0177.7	064.3	058.6	000.0800	0020.3	065.7	21.72
158.0	033.0000	0177.3	064.2	058.4	000.0800	0020.3	064.6	21.93
159.0	033.0000	0176.6	064.2	058.2	000.0800	0020.4	063.5	22.13
160.0	033.0000	0175.7	064.1	057.9	000.0800	0020.4	062.5	22.34
161.0	033.0000	0174.9	064.0	057.6	000.0800	0020.5	061.4	22.56
162.0	033.0000	0174.4	063.9	057.3	000.0800	0020.5	060.3	22.77
163.0	033.0000	0174.3	063.9	057.0	000.0800	0020.6	059.2	22.99
164.0	033.0000	0174.2	063.9	056.7	000.0800	0020.6	058.2	23.22
165.0	033.0000	0174.1	063.9	056.4	000.0800	0020.7	057.1	23.44
166.0	033.0000	0174.1	063.9	056.0	000.0800	0020.8	056.1	23.66
167.0	033.0000	0173.9	063.9	055.6	000.0800	0020.9	055.0	23.89
168.0	033.0000	0173.8	063.9	055.1	000.0800	0021.1	054.0	24.11
169.0	033.0000	0173.7	063.9	054.6	000.0800	0021.4	053.0	24.33
170.0	033.0000	0173.6	063.8	054.1	000.0800	0021.8	052.0	24.55
171.0	033.0000	0173.4	063.8	053.5	000.0800	0022.3	051.0	24.76
172.0	033.0000	0173.2	063.8	052.9	000.0800	0023.0	050.0	24.98

Exhibit 12.6

Contour Protection Studies Toward Select Station(s)

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
173.0	033.0000	0173.3	063.8	052.3	000.0800	0023.8	049.0	25.19
174.0	033.0000	0173.4	063.8	051.6	000.0800	0024.6	048.1	25.39
175.0	033.0000	0173.2	063.8	050.9	000.0800	0025.4	047.1	25.60
176.0	033.0000	0172.9	063.8	050.1	000.0800	0026.1	046.2	25.81
177.0	033.0000	0172.6	063.7	049.2	000.0800	0026.5	045.3	26.03
178.0	033.0000	0173.0	063.8	048.4	000.0800	0026.8	044.4	26.27
179.0	033.0000	0173.4	063.8	047.5	000.0800	0027.0	043.6	26.50
180.0	033.0000	0173.5	063.8	046.5	000.0800	0027.4	042.7	26.74
181.0	033.0000	0173.5	063.8	045.4	000.0800	0028.2	041.9	26.97
182.0	033.0000	0173.5	063.8	044.3	000.0800	0029.2	041.2	27.20
183.0	033.0000	0173.3	063.8	043.1	000.0800	0030.5	040.4	27.53
184.0	033.0000	0173.0	063.8	041.9	000.0800	0031.8	039.8	28.01
185.0	033.0000	0173.1	063.8	040.6	000.0800	0032.9	039.1	28.45
186.0	033.0000	0173.3	063.8	039.2	000.0800	0033.6	038.4	28.83
187.0	033.0000	0173.6	063.8	037.9	000.0800	0034.2	037.8	29.17
188.0	033.0000	0173.9	063.9	036.4	000.0800	0034.7	037.2	29.48
189.0	033.0000	0174.4	063.9	034.9	000.0800	0035.2	036.7	29.78
190.0	033.0000	0175.0	064.0	033.4	000.0800	0035.9	036.1	30.12
191.0	033.0000	0175.9	064.1	031.8	000.0800	0037.2	035.6	30.58
192.0	033.0000	0176.8	064.2	030.1	000.0800	0039.1	035.1	31.14
193.0	033.0000	0177.1	064.2	028.4	000.0800	0041.2	034.8	31.69
194.0	033.0000	0177.6	064.3	026.6	000.0800	0043.0	034.4	32.17
195.0	033.0000	0178.2	064.3	024.8	000.0800	0044.4	034.2	32.56
196.0	033.0000	0178.7	064.4	022.9	000.0800	0045.5	033.9	32.86
197.0	033.0000	0178.8	064.4	021.0	000.0800	0046.3	033.8	33.04
198.0	033.0000	0178.1	064.3	019.1	000.0800	0047.0	033.8	33.17
199.0	033.0000	0177.3	064.2	017.3	000.0800	0047.2	033.9	33.17
200.0	033.0000	0176.9	064.2	015.4	000.0800	0047.7	034.0	33.23
201.0	033.0000	0176.9	064.2	013.5	000.0800	0049.2	034.1	33.44
202.0	033.0000	0176.9	064.2	011.6	000.0800	0050.0	034.3	33.50
203.0	033.0000	0176.9	064.2	009.8	000.0800	0050.6	034.5	33.51
204.0	033.0000	0176.8	064.2	008.0	000.0800	0051.3	034.8	33.53
205.0	033.0000	0176.7	064.2	006.3	000.0800	0052.0	035.1	33.49
206.0	033.0000	0176.7	064.2	004.6	000.0800	0052.5	035.5	33.42
207.0	033.0000	0177.1	064.2	002.9	000.0800	0052.9	035.9	33.33
208.0	033.0000	0178.1	064.3	001.2	000.0800	0053.2	036.3	33.23
209.0	033.0000	0179.3	064.4	359.6	000.0800	0053.2	036.7	33.06
210.0	033.0000	0180.4	064.5	358.0	000.0800	0052.9	037.2	32.82
211.0	033.0000	0181.1	064.6	356.5	000.0800	0052.9	037.7	32.60
212.0	033.0000	0181.8	064.7	355.0	000.0800	0052.9	038.3	32.38
213.0	033.0000	0182.4	064.7	353.7	000.0800	0052.7	039.0	32.09
214.0	033.0000	0182.9	064.8	352.4	000.0800	0052.4	039.7	31.79
215.0	033.0000	0183.5	064.8	351.1	000.0800	0052.3	040.4	31.52
216.0	033.0000	0183.9	064.9	350.0	000.0800	0052.5	041.2	31.26
217.0	033.0000	0184.1	064.9	348.9	000.0800	0052.6	042.0	31.00
218.0	033.0000	0184.1	064.9	347.9	000.0800	0052.8	042.8	30.72
219.0	033.0000	0184.1	064.9	346.9	000.0800	0052.8	043.7	30.43
220.0	033.0000	0183.9	064.9	346.1	000.0800	0052.9	044.6	30.13
221.0	033.0000	0183.8	064.9	345.2	000.0800	0052.9	045.5	29.83
222.0	033.0000	0183.8	064.9	344.5	000.0800	0052.8	046.5	29.52

Exhibit 12.6

Contour Protection Studies Toward Select Station(s)

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
223.0	033.0000	0184.0	064.9	343.7	000.0800	0052.7	047.4	29.21
224.0	033.0000	0184.4	064.9	343.0	000.0800	0052.7	048.4	28.92
225.0	033.0000	0185.1	065.0	342.3	000.0800	0052.7	049.4	28.64
226.0	033.0000	0185.8	065.1	341.6	000.0800	0052.8	050.3	28.36
227.0	033.0000	0186.3	065.1	341.0	000.0800	0052.8	051.3	28.06
228.0	033.0000	0186.8	065.2	340.5	000.0800	0052.8	052.4	27.76
229.0	033.0000	0187.3	065.2	340.0	000.0800	0052.8	053.4	27.44
230.0	033.0000	0187.6	065.2	339.5	000.0800	0052.8	054.5	27.12
231.0	033.0000	0187.8	065.3	339.1	000.0800	0052.8	055.5	26.80
232.0	033.0000	0188.2	065.3	338.7	000.0800	0052.7	056.6	26.49
233.0	033.0000	0188.8	065.4	338.4	000.0800	0052.7	057.7	26.17
234.0	033.0000	0189.9	065.5	338.0	000.0800	0052.7	058.8	25.86
235.0	033.0000	0191.6	065.6	337.6	000.0800	0052.7	059.8	25.56
236.0	033.0000	0193.4	065.8	337.2	000.0800	0052.6	060.9	25.25
237.0	033.0000	0195.1	066.0	336.8	000.0800	0052.6	062.0	24.96
238.0	033.0000	0196.4	066.1	336.5	000.0800	0052.6	063.1	24.66
239.0	033.0000	0197.8	066.2	336.3	000.0800	0052.5	064.2	24.37
240.0	033.0000	0199.2	066.4	336.0	000.0800	0052.5	065.4	24.09
241.0	033.0000	0200.6	066.5	335.8	000.0800	0052.5	066.5	23.81
242.0	033.0000	0202.0	066.6	335.6	000.0800	0052.5	067.7	23.52
243.0	033.0000	0203.2	066.7	335.5	000.0800	0052.4	068.8	23.24
244.0	033.0000	0204.3	066.8	335.3	000.0800	0052.4	070.0	22.96
245.0	033.0000	0205.0	066.9	335.3	000.0800	0052.4	071.1	22.67
246.0	033.0000	0205.3	066.9	335.3	000.0800	0052.4	072.3	22.39
247.0	033.0000	0205.4	066.9	335.3	000.0800	0052.4	073.5	22.11
248.0	033.0000	0205.3	066.9	335.3	000.0800	0052.4	074.6	21.83
249.0	033.0000	0205.2	066.9	335.3	000.0800	0052.4	075.8	21.55
250.0	033.0000	0205.2	066.9	335.4	000.0800	0052.4	077.0	21.28
251.0	033.0000	0205.2	066.9	335.5	000.0800	0052.4	078.1	21.00
252.0	033.0000	0205.2	066.9	335.6	000.0800	0052.4	079.3	20.72
253.0	033.0000	0205.4	067.0	335.7	000.0800	0052.5	080.4	20.45
254.0	033.0000	0205.8	067.0	335.7	000.0800	0052.5	081.6	20.17
255.0	033.0000	0206.3	067.0	335.8	000.0800	0052.5	082.8	19.89
256.0	033.0000	0206.7	067.1	335.9	000.0800	0052.5	083.9	19.61
257.0	033.0000	0207.3	067.1	336.0	000.0800	0052.5	085.1	19.33
258.0	033.0000	0208.0	067.2	336.1	000.0800	0052.5	086.3	19.05

Exhibit 12.6

Contour Protection Studies Toward Select Station(s)

J. Ramon Ruvalcaba
W293AZ - Proposed Site - Elkhart, IN

FMCommander Single Allocation Study
05-15-2008

W293AZ CH 293 D
0.08 kW 283.5 M COR
Prot. = 60 dBu
Intef. = 54 dBu

WUBU-C CH 292 A BPH20040825AAG
3.0 kW, 323 M COR DA
Prot. = 60 dBu
Intef. = 54 dBu

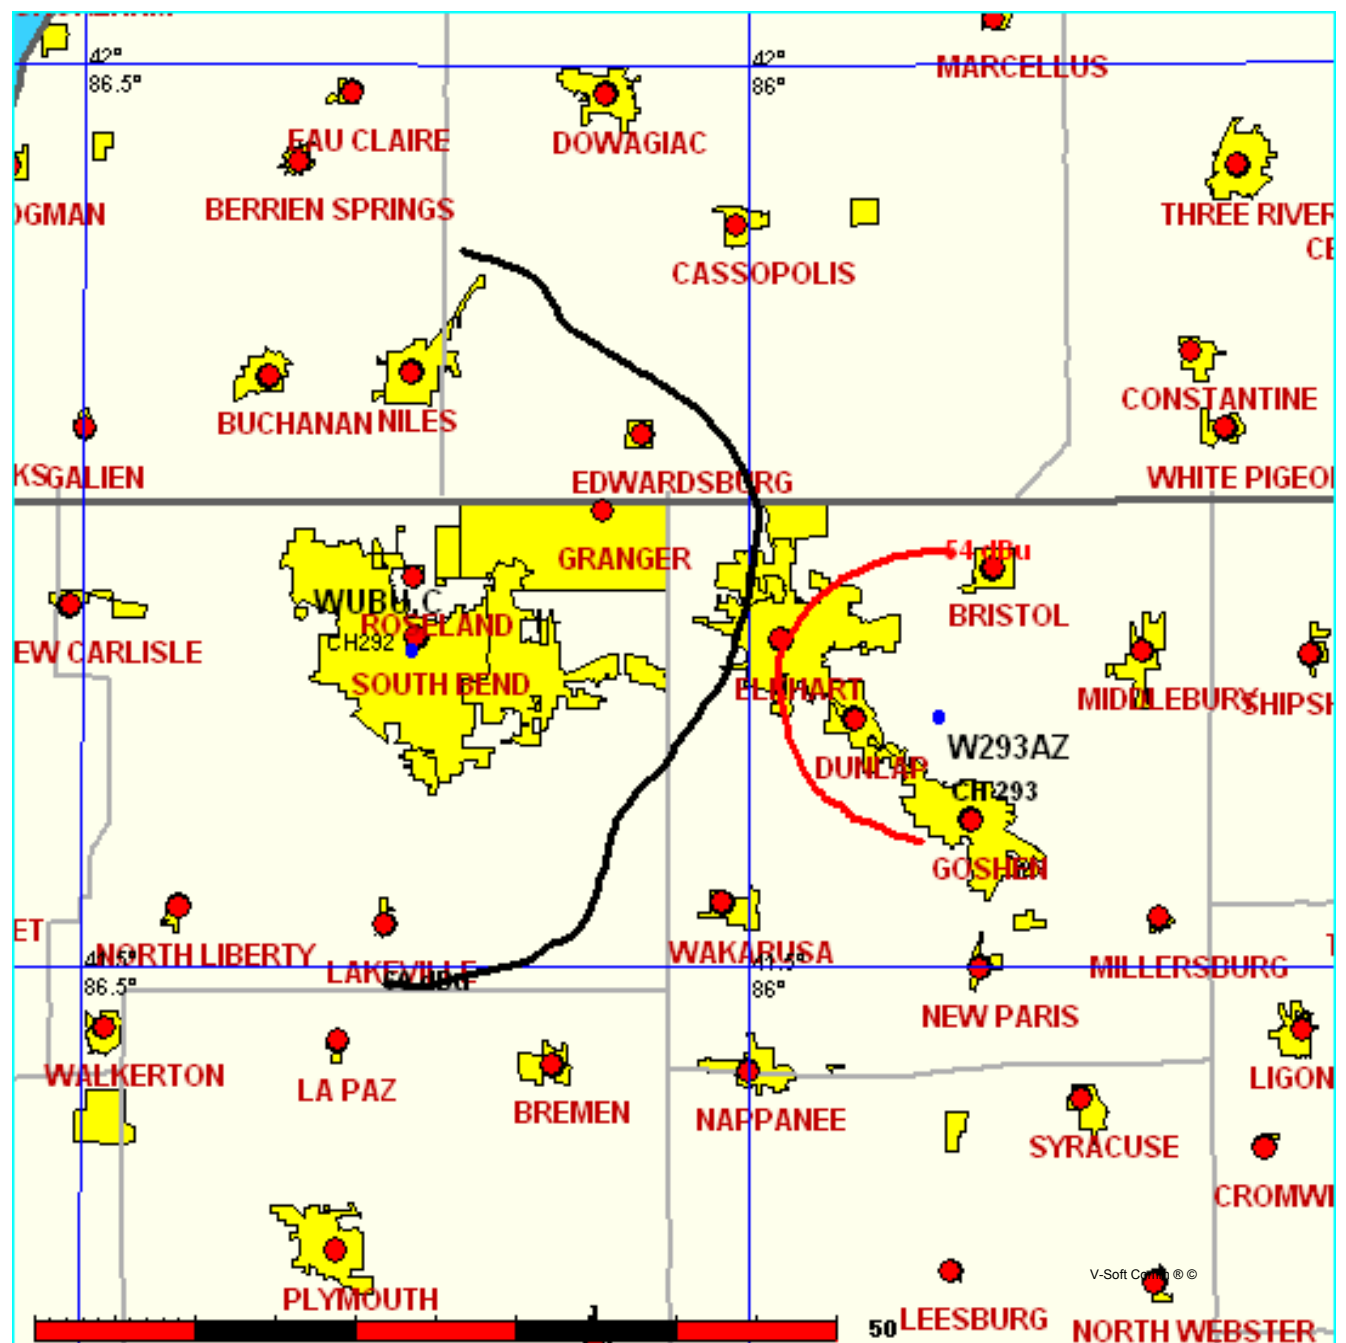


Exhibit 12.6

Contour Protection Studies Toward Select Station(s)

05-15-2008 NGDC 30 SEC Terrain Data

WUBU-C BPH20040825AAG

Channel = 292A

Max ERP = 3 kW

RCAMSL = 323 M

N. Lat. 41 40 35.0

W. Lng. 86 15 08.0

Protected

60 dBu

W293AZ

Channel = 293D

Max ERP = 0.08 kW

RCAMSL = 283.5 M

N. Lat. 41 38 21.0

W. Lng. 85 51 32.0

Interfering

54 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
037.0	003.0000	0082.5	022.1	318.4	000.0800	0054.4	029.1	36.65
038.0	003.0000	0082.8	022.1	318.6	000.0800	0054.4	028.7	36.86
039.0	003.0000	0083.4	022.2	318.9	000.0800	0054.3	028.4	37.07
040.0	003.0000	0084.2	022.3	319.2	000.0800	0054.3	028.0	37.28
041.0	003.0000	0084.8	022.4	319.5	000.0800	0054.3	027.6	37.51
042.0	003.0000	0085.4	022.4	319.8	000.0800	0054.3	027.3	37.74
043.0	003.0000	0086.0	022.5	320.0	000.0800	0054.3	026.9	37.98
044.0	003.0000	0086.5	022.6	320.3	000.0800	0054.2	026.5	38.23
045.0	003.0000	0087.1	022.7	320.5	000.0800	0054.2	026.1	38.49
046.0	003.0000	0087.8	022.7	320.8	000.0800	0054.2	025.7	38.75
047.0	003.0000	0088.4	022.8	321.0	000.0800	0054.2	025.3	39.03
048.0	003.0000	0089.1	022.9	321.3	000.0800	0054.3	024.9	39.31
049.0	003.0000	0089.9	023.0	321.6	000.0800	0054.3	024.5	39.60
050.0	003.0000	0090.7	023.1	321.8	000.0800	0054.3	024.1	39.89
051.0	003.0000	0091.3	023.2	322.0	000.0800	0054.4	023.7	40.20
052.0	003.0000	0091.7	023.2	322.2	000.0800	0054.4	023.3	40.51
053.0	003.0000	0092.0	023.3	322.2	000.0800	0054.4	022.9	40.82
054.0	003.0000	0092.1	023.3	322.2	000.0800	0054.4	022.5	41.13
055.0	003.0000	0092.3	023.3	322.2	000.0800	0054.4	022.1	41.45
056.0	003.0000	0092.6	023.3	322.3	000.0800	0054.4	021.7	41.77
057.0	003.0000	0092.8	023.4	322.3	000.0800	0054.4	021.3	42.10
058.0	003.0000	0092.9	023.4	322.2	000.0800	0054.4	020.9	42.42
059.0	003.0000	0093.0	023.4	322.1	000.0800	0054.4	020.5	42.75
060.0	003.0000	0093.0	023.4	321.9	000.0800	0054.4	020.1	43.07
061.0	002.9814	0093.0	023.4	321.6	000.0800	0054.3	019.7	43.39
062.0	002.9629	0093.1	023.3	321.4	000.0800	0054.3	019.3	43.72
063.0	002.9445	0093.2	023.3	321.1	000.0800	0054.2	018.9	44.04
064.0	002.9261	0093.4	023.3	320.8	000.0800	0054.2	018.5	44.37
065.0	002.9077	0093.6	023.3	320.4	000.0800	0054.2	018.1	44.71
066.0	002.8894	0093.7	023.3	320.0	000.0800	0054.3	017.7	45.04
067.0	002.8712	0093.6	023.2	319.5	000.0800	0054.3	017.4	45.37
068.0	002.8530	0093.3	023.2	318.8	000.0800	0054.4	017.0	45.69
069.0	002.8349	0092.8	023.1	318.1	000.0800	0054.4	016.6	46.00
070.0	002.8169	0092.3	023.0	317.2	000.0800	0054.5	016.3	46.31
071.0	002.7229	0091.9	022.7	315.9	000.0800	0054.7	016.0	46.58

MUNN-REESE, INC.Broadcast Engineering Consultants
Coldwater, MI 49036

Exhibit 12.6

Contour Protection Studies Toward Select Station(s)

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
072.0	002.6305	0091.7	022.5	314.6	000.0800	0055.0	015.8	46.85
073.0	002.5398	0091.7	022.4	313.3	000.0800	0055.3	015.5	47.13
074.0	002.4506	0091.7	022.2	312.0	000.0800	0055.6	015.3	47.38
075.0	002.3630	0092.0	022.0	310.7	000.0800	0055.6	015.1	47.58
076.0	002.2770	0092.3	021.9	309.3	000.0800	0055.5	014.8	47.56
077.0	002.1926	0092.8	021.7	308.0	000.0800	0055.5	014.6	47.83
078.0	002.1097	0093.4	021.6	306.7	000.0800	0055.9	014.4	48.13
079.0	002.0285	0094.0	021.5	305.3	000.0800	0056.2	014.2	48.40
080.0	001.9489	0094.6	021.3	303.8	000.0800	0056.2	014.1	48.60
081.0	001.8732	0095.1	021.2	302.3	000.0800	0056.0	013.9	48.76
082.0	001.7991	0095.7	021.0	300.8	000.0800	0055.9	013.8	48.90
083.0	001.7264	0096.3	020.9	299.2	000.0800	0055.7	013.7	49.02
084.0	001.6553	0096.7	020.7	297.5	000.0800	0055.8	013.6	49.12
085.0	001.5856	0097.3	020.6	295.9	000.0800	0056.0	013.6	49.24
086.0	001.5174	0097.8	020.4	294.2	000.0800	0056.3	013.5	49.32
087.0	001.4507	0098.7	020.3	292.6	000.0800	0056.4	013.5	49.38
088.0	001.3856	0100.0	020.2	291.1	000.0800	0056.5	013.4	49.50
089.0	001.3219	0101.4	020.1	289.6	000.0800	0056.7	013.4	49.59
090.0	001.2597	0102.8	020.0	288.0	000.0800	0056.5	013.4	49.59
091.0	001.2188	0103.7	019.9	286.5	000.0800	0055.7	013.3	49.50
092.0	001.1786	0104.1	019.8	284.9	000.0800	0054.7	013.4	49.28
093.0	001.1391	0104.6	019.7	283.4	000.0800	0053.8	013.4	49.07
094.0	001.1003	0105.1	019.6	281.8	000.0800	0052.7	013.5	48.79
095.0	001.0621	0105.7	019.5	280.4	000.0800	0051.9	013.6	48.54
096.0	001.0246	0106.3	019.3	278.9	000.0800	0051.2	013.7	48.29
097.0	000.9877	0106.5	019.2	277.5	000.0800	0050.6	013.8	47.98
098.0	000.9516	0106.4	019.0	276.1	000.0800	0049.9	014.0	47.61
099.0	000.9161	0106.1	018.8	274.8	000.0800	0049.2	014.3	47.17
100.0	000.8813	0105.6	018.5	273.6	000.0800	0048.5	014.5	46.72
101.0	000.8677	0105.1	018.4	272.4	000.0800	0048.0	014.7	46.42
102.0	000.8542	0104.7	018.3	271.3	000.0800	0047.5	014.8	46.15
103.0	000.8408	0104.5	018.2	270.2	000.0800	0047.2	015.0	46.09
104.0	000.8275	0104.2	018.1	269.1	000.0800	0046.7	015.2	45.84
105.0	000.8143	0104.0	018.0	268.1	000.0800	0046.3	015.4	45.59
106.0	000.8012	0103.6	017.9	267.1	000.0800	0045.9	015.6	45.33
107.0	000.7883	0103.2	017.8	266.2	000.0800	0045.8	015.8	45.12
108.0	000.7754	0102.8	017.7	265.3	000.0800	0045.7	016.0	44.91
109.0	000.7627	0102.3	017.5	264.5	000.0800	0045.7	016.3	44.68
110.0	000.7500	0101.6	017.4	263.7	000.0800	0045.8	016.5	44.47
111.0	000.7627	0100.8	017.4	262.8	000.0800	0045.8	016.7	44.37
112.0	000.7754	0099.9	017.4	261.9	000.0800	0045.7	016.8	44.19
113.0	000.7883	0098.8	017.3	261.1	000.0800	0045.5	017.0	44.00
114.0	000.8012	0097.5	017.3	260.4	000.0800	0045.3	017.2	43.77
115.0	000.8143	0096.0	017.2	259.7	000.0800	0044.9	017.5	43.50
116.0	000.8275	0094.6	017.1	259.0	000.0800	0044.7	017.7	43.24
117.0	000.8408	0093.1	017.0	258.4	000.0800	0044.5	017.9	42.98
118.0	000.8542	0091.4	016.9	257.9	000.0800	0044.3	018.2	42.71
119.0	000.8677	0089.4	016.8	257.6	000.0800	0044.1	018.5	42.42
120.0	000.8813	0087.2	016.6	257.2	000.0800	0044.0	018.8	42.13
121.0	000.9161	0085.0	016.6	256.7	000.0800	0043.8	019.1	41.88

Exhibit 12.6

Contour Protection Studies Toward Select Station(s)

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
122.0	000.9516	0083.1	016.5	256.2	000.0800	0043.7	019.3	41.66
123.0	000.9877	0081.5	016.5	255.7	000.0800	0043.5	019.5	41.44
124.0	001.0246	0080.0	016.5	255.1	000.0800	0043.3	019.8	41.22
125.0	001.0621	0078.6	016.5	254.6	000.0800	0043.1	020.0	40.99
126.0	001.1003	0077.2	016.5	254.1	000.0800	0042.9	020.2	40.77
127.0	001.1391	0076.0	016.5	253.6	000.0800	0042.8	020.4	40.57
128.0	001.1786	0074.8	016.5	253.1	000.0800	0042.8	020.7	40.38
129.0	001.2188	0073.8	016.5	252.6	000.0800	0042.8	020.9	40.19
130.0	001.2597	0072.9	016.6	252.0	000.0800	0042.7	021.1	40.00
131.0	001.3219	0072.0	016.7	251.4	000.0800	0042.6	021.3	39.83
132.0	001.3856	0071.2	016.8	250.7	000.0800	0042.5	021.5	39.66
133.0	001.4507	0070.5	016.9	250.1	000.0800	0042.5	021.7	39.49
134.0	001.5174	0070.1	017.1	249.3	000.0800	0042.4	021.9	39.32
135.0	001.5856	0070.0	017.3	248.6	000.0800	0042.3	022.1	39.15
136.0	001.6553	0070.0	017.5	247.8	000.0800	0042.3	022.3	38.99
137.0	001.7264	0070.0	017.7	247.0	000.0800	0042.2	022.5	38.81
138.0	001.7991	0070.0	017.9	246.3	000.0800	0042.1	022.7	38.61
139.0	001.8732	0070.1	018.1	245.6	000.0800	0041.9	023.0	38.39
140.0	001.9489	0070.2	018.3	244.9	000.0800	0041.7	023.2	38.17
141.0	002.0285	0070.4	018.5	244.1	000.0800	0041.6	023.5	37.94
142.0	002.1097	0070.7	018.8	243.4	000.0800	0041.4	023.7	37.71
143.0	002.1926	0071.0	019.0	242.8	000.0800	0041.2	024.0	37.46
144.0	002.2770	0071.3	019.2	242.1	000.0800	0041.1	024.3	37.22
145.0	002.3630	0071.5	019.4	241.5	000.0800	0040.9	024.6	36.97
146.0	002.4506	0071.6	019.6	241.0	000.0800	0040.8	025.0	36.72
147.0	002.5398	0071.7	019.8	240.5	000.0800	0040.7	025.3	36.46
148.0	002.6305	0071.8	020.0	240.1	000.0800	0040.6	025.6	36.21
149.0	002.7229	0071.8	020.1	239.7	000.0800	0040.5	026.0	35.96
150.0	002.8169	0071.5	020.3	239.4	000.0800	0040.4	026.3	35.71
151.0	002.8349	0071.1	020.2	239.5	000.0800	0040.4	026.7	35.49
152.0	002.8530	0070.6	020.2	239.6	000.0800	0040.4	027.0	35.27
153.0	002.8712	0070.2	020.2	239.7	000.0800	0040.5	027.4	35.06
154.0	002.8894	0069.8	020.2	239.8	000.0800	0040.5	027.7	34.86
155.0	002.9077	0069.6	020.2	239.8	000.0800	0040.5	028.1	34.65
156.0	002.9261	0069.7	020.2	239.8	000.0800	0040.5	028.4	34.45
157.0	002.9445	0070.0	020.3	239.7	000.0800	0040.5	028.8	34.24