

Minor Change Application

The proposed minor change application specifies a new site with changes to the technical parameters as is indicated below:

	Licensed	Minor Change
Channel / Class	268 D	268 D
Geographical Coordinates	33 52 14 / 116 13 39	33 52 04 / 116 25 59
ASRN	1057857	N/A
Site AMSL	792.5 m	480 m
Tower AGL	56.4 m	17 m
COR AGL	17 m	12 m
COR AMSL	810 m	492 m
HAAT	96 m	184 m
ERP	0.010 kW (H&V, non-DA)	0.055 kW (H&V, non-DA)

The below listed pages of this exhibit contains information as indicated.

Page 2 Tabulation of HAAT / ERP / distance to 60 dBu contour
Page 3 60 dBu contour map
Page 4 - 7 Allocation study

Tabulation of HAAT / ERP / distance to 60 dBu contour

CH 268 33 52 04 / 116 25 59 0.055 kW ERP (non-DA) 492 m COR AMSL 184 m HAAT


Azi.	AV EL	HAAT	ERP kW	dBk	Field	60-F5
000	530.8	-38.8	0.0550	-12.60	1.000	4.83
010	688.9	-196.9	0.0550	-12.60	1.000	4.83
020	663.5	-171.5	0.0550	-12.60	1.000	4.83
030	653.0	-161.0	0.0550	-12.60	1.000	4.83
040	706.9	-214.9	0.0550	-12.60	1.000	4.83
050	672.5	-180.5	0.0550	-12.60	1.000	4.83
060	545.0	-53.0	0.0550	-12.60	1.000	4.83
070	499.0	-7.0	0.0550	-12.60	1.000	4.83
080	370.4	121.6	0.0550	-12.60	1.000	9.79
090	292.0	200.0	0.0550	-12.60	1.000	12.57
100	258.4	233.6	0.0550	-12.60	1.000	13.53
110	187.9	304.1	0.0550	-12.60	1.000	15.50
120	117.7	374.3	0.0550	-12.60	1.000	17.25
130	96.9	395.1	0.0550	-12.60	1.000	17.70
140	77.9	414.1	0.0550	-12.60	1.000	18.11
150	88.3	403.7	0.0550	-12.60	1.000	17.89
160	84.9	407.1	0.0550	-12.60	1.000	17.96
170	85.6	406.4	0.0550	-12.60	1.000	17.95
180	133.6	358.4	0.0550	-12.60	1.000	16.89
190	222.0	270.0	0.0550	-12.60	1.000	14.55
200	220.3	271.7	0.0550	-12.60	1.000	14.60
210	227.0	265.0	0.0550	-12.60	1.000	14.41
220	140.0	352.0	0.0550	-12.60	1.000	16.74
230	184.7	307.3	0.0550	-12.60	1.000	15.59
240	303.7	188.3	0.0550	-12.60	1.000	12.23
250	358.2	133.8	0.0550	-12.60	1.000	10.25
260	289.8	202.2	0.0550	-12.60	1.000	12.64
270	245.3	246.7	0.0550	-12.60	1.000	13.90
280	197.6	294.4	0.0550	-12.60	1.000	15.24
290	212.5	279.5	0.0550	-12.60	1.000	14.82
300	243.8	248.2	0.0550	-12.60	1.000	13.93
310	263.8	228.2	0.0550	-12.60	1.000	13.39
320	275.8	216.2	0.0550	-12.60	1.000	13.04
330	313.1	178.9	0.0550	-12.60	1.000	11.94
340	417.0	75.0	0.0550	-12.60	1.000	7.62
350	540.8	-48.8	0.0550	-12.60	1.000	4.83

GLOBE terrain database

(yellow highlighted values establish average HAAT)

60 dBu contour

The proposed 60 dBu contour will continue to have overlap with the licensed 60 dBu contour.

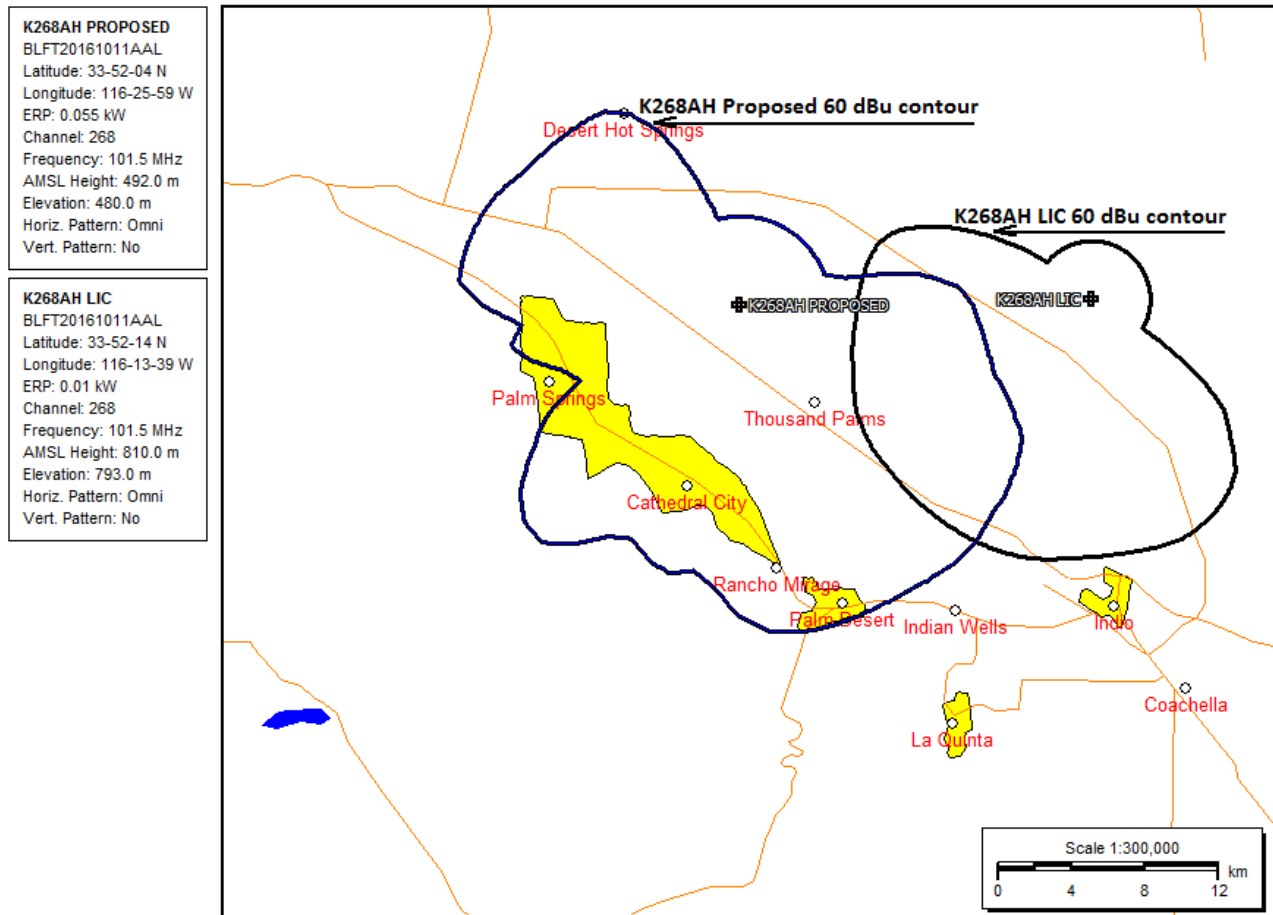

Allocation Study

CH 268 33 52 04 / 116 25 59 0.055 kW ERP (non-DA) 492 m COR AMSL 184 m HAAT

CH CITY	CALL	TYPE STATE	AZI. <--	DIST FILE #	LAT. LNG.	Pwr (kW) HAAT (M)	INT (km) COR (M)	PRO (km) LICENSEE	*IN* (Overlap in km)	*OUT*
------------	------	---------------	-------------	----------------	--------------	----------------------	---------------------	----------------------	-------------------------	-------

Reference station:

268D	K268AH	LIC	89.0	19.02	33 52 14.0	0.010	52.6	12.7		
Palm Springs	CA	269.1	BLFT20161011AAL	116 13 39.0		810		Educational Media Foundation		

1st, 2nd, & 3rd adjacent channel relationships:

265D	K266CH	APP	191.9	0.12	33 52 00.0	0.075	0.1	2.2	-14.7	-2.5
Cathedral City	CA	11.9	BMPFT20170206ABN	116 26 00.0		487		Crc Media West, Llc		

266D	K266CH	CP	191.9	0.12	33 52 00.0	0.007	0.2	2.9	-14.8	-3.3
Cathedral City	CA	11.9	BMPFT20161114ABU	116 26 00.0		487		Crc Media West, Llc		

265A	KAHEH	LIC	275.1	52.25	33 54 29.0	1.500	2.1	23.5	34.8	24.7
Beaumont	CA	94.8	BLH20000330ACC	116 59 45.0	146	892		Casa Media Partners, Llc		

266B	KRTH	LIC	285.3	156.02	34 13 38.0	51.000	12.3	109.6	128.2	43.4
Los Angeles	CA	104.4	BMLH20071015AJG	118 04 00.0	955	1854		Cbs Radio East Inc.		

267A	KATY-FM	LIC	241.6	33.29	33 43 31.0	1.550	16.1	11.3	1.9	0.2
Idyllwild	CA	61.5	BMLH20071002ACQ	116 44 58.0	200	1650		All Pro Broadcasting, Inc.		

268B	KIXF	LIC	14.8	180.13	35 26 10.0	4.300	138.6	73.8	33.6	83.6
Baker	CA	195.1	BLH19940505KE	115 55 25.0	403	1368		Khwy, Inc.		

268B	KGB-FM	LIC	205.7	140.00	32 43 48.0	50.000	125.6	49.4	-1.4	17.2
San Diego	CA	25.4	BMLH20041122AHP	117 05 03.0	152	240		Citicasters Licenses, Inc.		

269L1	KKLQ-LP	CP	155.6	26.49	33 39 01.2	0.100			-0.1	-6.7
La Quinta	CA	335.7	BNPL20131113BNP	116 18 52.4	-313	103		Gospel Spots, Inc.		

NOTE: KKLQ-LP Construction Permit has been surrendered as of 3/6/2017.

269A	KXSB	LIC	314.0	55.38	34 12 47.0	0.300	40.5	26.2	1.5	8.9
Big Bear Lake	CA	133.8	BLH19951010KB	116 51 59.0	431	2616		Lazer Licenses, Llc		

270D	K270AI	LIC	0.0	0.00	33 52 04.0	0.010	0.0	1.6	-4.9	-2.1
Cathedral City	CA	0.0	BLFT20081107AEM	116 25 59.0	178	492		Educational Media Foundation		

270B	KSCA	LIC	285.2	155.55	34 13 26.0	4.800	4.5	81.2	135.6	71.6
Glendale	CA	104.3	BMLH20111031ADQ	118 03 45.0	863	1763		Univision Radio License Co		

I.F. relationships:

None

International (Mexico) Compliance:

K268AH as proposed will be fully spaced to all Mexican stations and allocations. K268AH's proposed site is located a minimum of 141.0 km from the Mexico border. The proposed 60 dBu contour of K268AH will extend out no more than 18.1 km in any direction, a minimum of 122.9 km from the border, thus the 60 dBu contour will not be within 116.3 km of the border in accordance with Section 73.1235(d)(2).

GLOBE Terrain database

Contour distances are on direct line to and from reference station.

Allocation Study

K268AH will be located within the 60 dBu contour of the following second adjacent facilities:

K270AI (LIC), CH 270D, Cathedral City , CA

K268AH as proposed is relocating to the K270AI site and will share the same antenna (a minor change application is being filed for K270AI for an increase in ERP to 0.095 kW and to change the antenna), thus there will be no interference issue or population affected with regard to K270AI.

K266CH (CP), CH 266D, Cathedral City , CA

K266CH signal strength at the K268AH site	103.3 dBu
K268AH interference contour	143.3 dBu
Distance to K268AH interference contour	4 meters

K266CH (APP), CH 266D, Cathedral City , CA

K266CH signal strength at the K268AH site	97.8 dBu
K268AH interference contour	137.8 dBu
Distance to K268AH interference contour	7 meters

The K268AH interference contour to K266CH (APP) extends out 7 meters from the tower which will not reach the ground or any populated structures by a margin of 5 meters (from K268AH's antenna COR AGL of 12 meters). Furthermore, there are no populated structures other than unoccupied equipment shelters at the site within 7 meters of the tower. Therefore, based on the showing of no population within the area of predicted interference, a waiver of Section 74.1204(d) is respectfully requested.




Allocation Study

The following pages of this Exhibit demonstrate the lack of prohibited overlap between K268AH as proposed and KATY-FM (LIC), CH 267A, Idyllwild, CA.

KATY-FM LIC				K268AH PROPOSED					
CH 267 A				CH 268 D					
Max ERP 1.550 kW				Max ERP 0.055 kW					
COR AMSL 1650 m				COR AMSL 492 m					
33 43 31 / 116 44 58				33 52 04 / 116 25 59					
Protected 60 dBu				Interfering 54 dBu					
Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)	
073.0	001.5500	-0264.7	011.3	235.8	000.0550	0235.2	022.3	52.57	
074.0	001.5500	-0229.3	011.3	235.3	000.0550	0239.1	022.4	52.66	
075.0	001.5500	-0190.6	011.3	234.9	000.0550	0243.6	022.4	52.75	
076.0	001.5500	-0155.0	011.3	234.4	000.0550	0248.4	022.5	52.85	
077.0	001.5500	-0129.0	011.3	233.9	000.0550	0253.8	022.6	52.96	
078.0	001.5500	-0110.9	011.3	233.5	000.0550	0260.3	022.6	53.11	
079.0	001.5500	-0092.1	011.3	233.0	000.0550	0267.2	022.7	53.26	
080.0	001.5500	-0066.2	011.3	232.6	000.0550	0274.5	022.8	53.42	
081.0	001.5500	-0035.7	011.3	232.1	000.0550	0281.4	022.9	53.56	
082.0	001.5500	-0008.8	011.3	231.7	000.0550	0288.0	023.0	53.68	
083.0	001.5500	0014.0	011.3	231.3	000.0550	0293.7	023.1	53.77	
084.0	001.5500	0026.5	011.3	230.9	000.0550	0298.7	023.2	53.83	
085.0	001.5500	0024.4	011.3	230.5	000.0550	0302.9	023.3	53.86	
086.0	001.5500	0015.4	011.3	230.1	000.0550	0306.7	023.4	53.88	
087.0	001.5500	0004.3	011.3	229.7	000.0550	0309.5	023.6	53.87	
088.0	001.5500	-0005.2	011.3	229.3	000.0550	0312.3	023.7	53.85	
089.0	001.5500	-0014.8	011.3	229.0	000.0550	0314.7	023.8	53.82	
090.0	001.5500	-0025.2	011.3	228.6	000.0550	0317.0	023.9	53.79	
091.0	001.5500	-0035.8	011.3	228.2	000.0550	0319.1	024.1	53.75	
092.0	001.5500	-0044.5	011.3	227.9	000.0550	0321.5	024.2	53.72	
093.0	001.5500	-0039.4	011.3	227.6	000.0550	0324.1	024.3	53.69	
094.0	001.5500	-0036.4	011.3	227.3	000.0550	0326.6	024.5	53.65	
095.0	001.5500	-0035.8	011.3	227.0	000.0550	0329.2	024.6	53.62	
096.0	001.5500	-0039.1	011.3	226.6	000.0550	0331.8	024.8	53.58	
097.0	001.5500	-0033.4	011.3	226.4	000.0550	0334.3	024.9	53.54	
098.0	001.5500	-0020.7	011.3	226.1	000.0550	0336.6	025.1	53.50	
099.0	001.5500	-0010.0	011.3	225.8	000.0550	0338.9	025.2	53.45	
100.0	001.5500	-0004.0	011.3	225.5	000.0550	0340.9	025.4	53.39	
101.0	001.5500	-0004.1	011.3	225.3	000.0550	0342.8	025.6	53.33	
102.0	001.5500	-0009.8	011.3	225.0	000.0550	0344.4	025.7	53.26	
103.0	001.5500	-0017.6	011.3	224.8	000.0550	0345.9	025.9	53.18	
104.0	001.5500	-0025.2	011.3	224.6	000.0550	0347.3	026.1	53.11	
105.0	001.5500	-0027.7	011.3	224.4	000.0550	0348.5	026.2	53.02	
106.0	001.5500	-0026.3	011.3	224.2	000.0550	0349.4	026.4	52.93	
107.0	001.5500	-0022.6	011.3	224.0	000.0550	0350.2	026.6	52.83	
108.0	001.5500	-0016.8	011.3	223.8	000.0550	0350.9	026.8	52.74	
109.0	001.5500	-0009.4	011.3	223.6	000.0550	0351.5	026.9	52.63	
110.0	001.5500	0004.5	011.3	223.4	000.0550	0352.0	027.1	52.53	
111.0	001.5500	0022.6	011.3	223.3	000.0550	0352.3	027.3	52.42	
112.0	001.5500	0039.2	012.7	220.3	000.0550	0352.7	027.0	52.62	
GLOBE terrain database									

Allocation Study

Map of K268AH proposed and KATY-FM licensed protected and interference contours

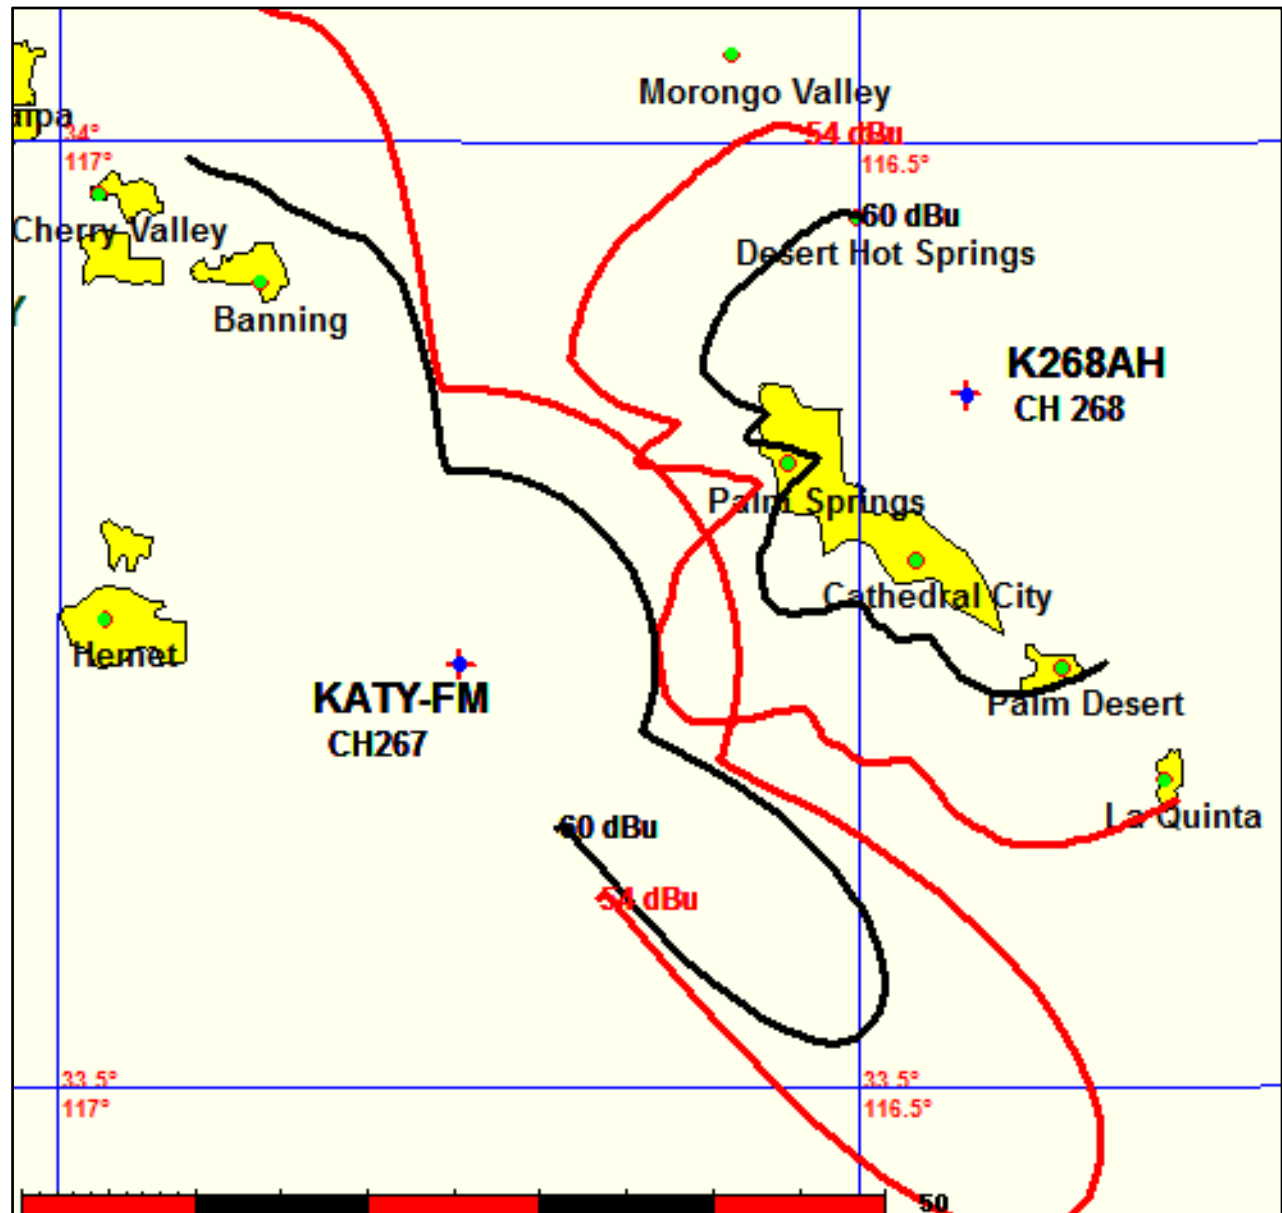

GLOBE terrain database