

EXHIBIT 7
(Page 1 of 4)

NONIONIZING RADIATION COMPLIANCE

Lucinda DeVaul
Canton, OH

The proposed W10CK facilities will fully comply with the current FCC Standard with regard to human exposure to nonionizing radiation. The proposed antenna will be a Jampro JA/LS-TB-8 directional antenna that will be mounted at the 91.4 meter level on an existing 238.7 meter tower that presently supports the antenna for WHK-FM - Canton, Ohio and also the antennas for numerous non-broadcast radio facilities. Table 7.0 and Figure 7.0 present the vertical radiation pattern for the proposed antenna. Equation (1), found on Page 30 of Supplement A to FCC OET Bulletin No. 65, details the calculation technique used to determine the power density at the base of a TV broadcast tower. Using this vertical radiation pattern and assuming a maximum peak visual effective radiated power of 22 kilowatts and a maximum aural effective radiated power of 2.2 kilowatts, this equation predicts a worst case power density level at two meters above ground level of $2.07 \mu\text{W}/\text{cm}^2$, which will occur at a distance of 29 meters from the base of this tower. Since the permitted power density for uncontrolled exposure to nonionizing radiation on Channel 52 is $465.3 \mu\text{W}/\text{cm}^2$, this amounts to only 0.44% of the permitted level. Since this value is less than 5% of the permitted level, the proposed W10CK facilities are excluded from environmental processing and need not be considered in conjunction with other co-located and nearby facilities to establish compliance with the FCC's exposure standard.

W10CK, in conjunction with the other facilities located on this tower, will also take appropriate steps to insure that workers that must climb this tower will not be exposed to levels of nonionizing radiation that are in excess of the permitted level for controlled

EXHIBIT 7
(Page 2 of 4)

exposure. These steps will include the cessation of operation or a reduction in power by one or more of these facilities, as appropriate, when work becomes necessary on this tower in the areas where the total power density levels will be in excess of the permitted level for controlled exposure.

TABLE OF FIELD STRENGTH FOR : JALSTB8.ELV

		INCREMENTAL DEGREES									
		0	1	2	3	4	5	6	7	8	9
+-----		-----									
	+	1.000	.969	.878	.732	.560	.373	.189	.026	.101	.184
	-	1.000	.969	.878	.732	.560	.373	.189	.026	.101	.184
D	-10	.222	.214	.172	.109	.035	.036	.093	.128	.140	.128
E	-20	.095	.051	.001	.046	.082	.106	.111	.100	.075	.040
G	-30	.000	.038	.069	.091	.100	.095	.079	.054	.023	.011
R	-40	.043	.070	.090	.099	.099	.090	.072	.047	.018	.013
E	-50	.044	.071	.094	.109	.119	.119	.114	.100	.082	.057
E	-60	.031	.001	.029	.060	.090	.116	.142	.166	.181	.198
S	-70	.212	.216	.223	.220	.221	.221	.210	.205	.200	.183
	-80	.176	.167	.158	.149	.150	.140	.130	.120	.120	.110
	-90	.100									

TABLE 7.0

VERTICAL RADIATION PATTERN

Lucinda DeVaul
Canton, OH

Frequency: <MHz> 699.25

File Name: JALSTB8.ELU

JAMPRO ANTENNAS INC.

Bays : 8

ELEVATION PATTERN

Spacing (Wavelength): 1.00

Model : SLOT

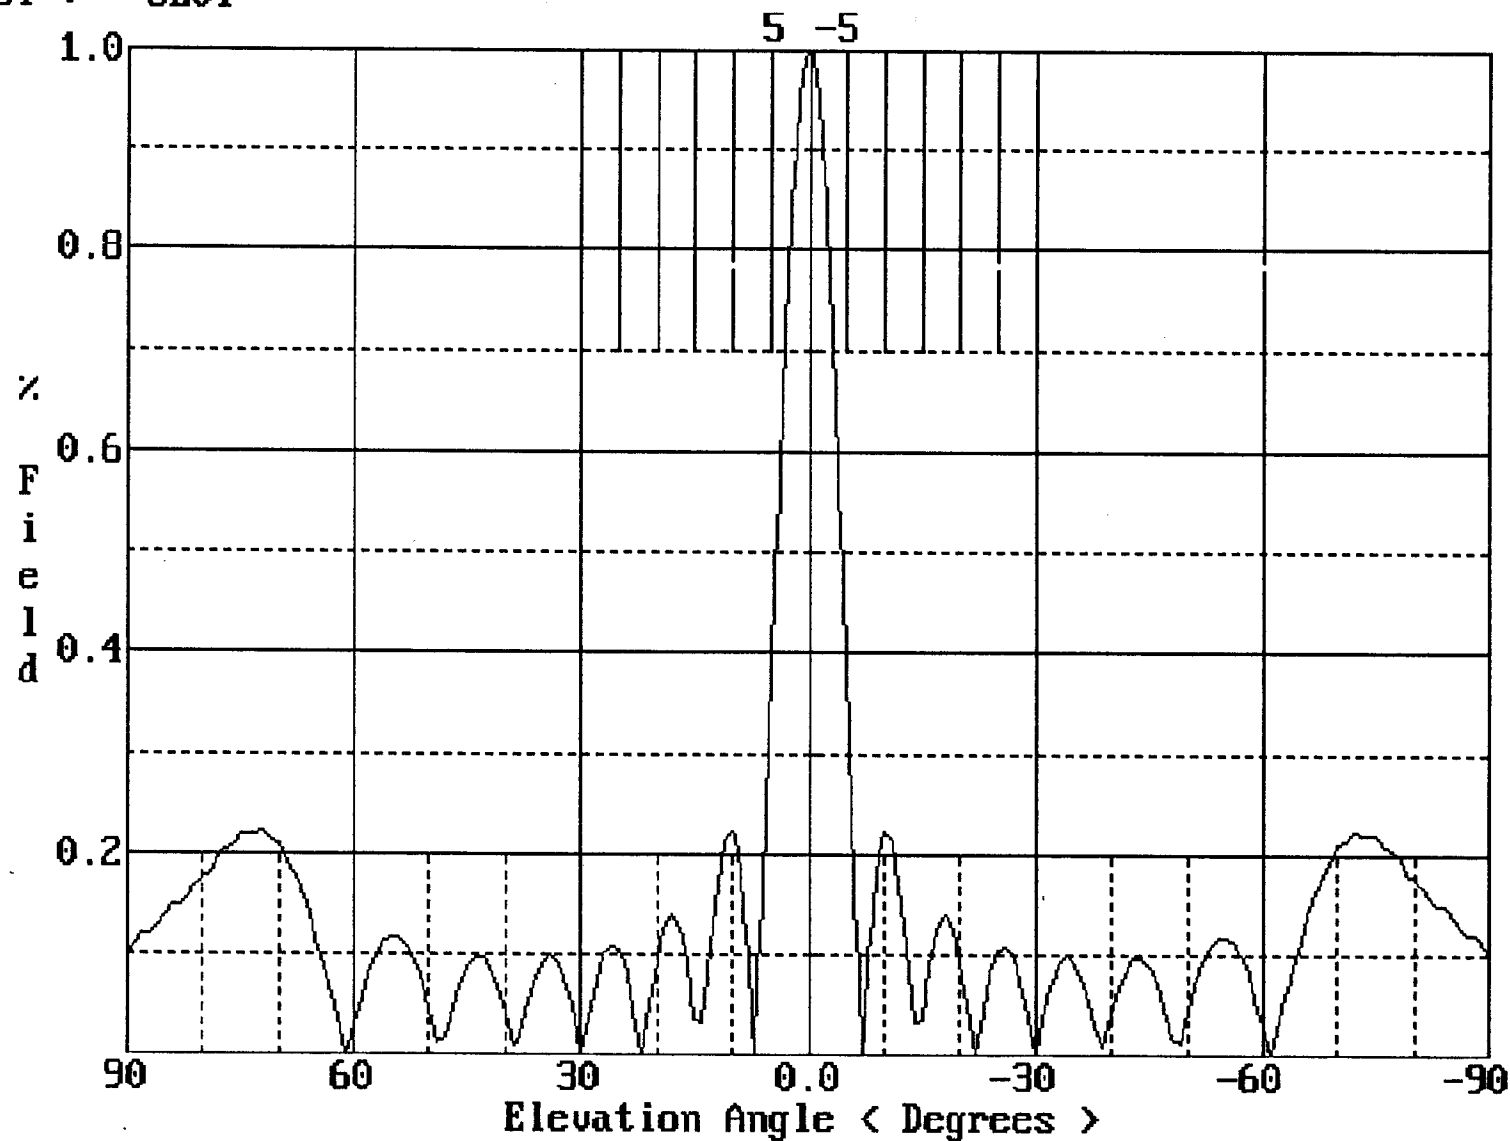


FIG. 7.0

VERTICAL RADIATION PATTERN

Lucinda DeVaul
Canton, OH