

TECHNICAL EXHIBIT  
APPLICATION FOR DTV MAXIMIZATION  
STATION KLTV-DT (FACILITY ID 68540)  
TYLER, TEXAS  
CH 7 66 KW 300 M

Technical Narrative

This Technical Exhibit supports an application for digital television (DTV) station KLTV-DT to maximize its post-transition facility. This application requests a construction permit (CP) for a digital television operation on channel 7, using its licensed non-directional antenna.

Proposed Facilities

Station KLTV-DT proposes to operate DTV channel 7 with a non-directional effective radiated power (ERP) of 66 kilowatts and antenna height above average terrain (HAAT) of 300 meters. The transmitter site coordinates are:

32° 32' 23" North Latitude  
95° 13' 11" West Longitude

A sketch of antenna and pertinent elevations are included as Figure 1. Figure 2 is a map showing the DTV predicted coverage contours. The predicted 43 dBu contour will encompass all of Tyler. The Tyler city limits were derived from information contained in the 2000 U.S. Census of Population and Housing.

---

Population Served

The herein proposed KLTV-DT “maximized” facility is predicted to serve 907,932 persons, post-transition, based upon the 2000 Census. KLTV-DT’s associated Appendix B facility is predicted to serve 762,009 persons. Therefore, the herein proposed KLTV-DT facility would serve more than 100% of KLTV-DT’s Appendix B population.

Allocation Considerations

The proposed KLTV-DT operation meets the FCC’s 0.5% post-transition interference standards to pertinent Class A and DTV facilities using the procedures outlined in the FCC’s OET-69 Bulletin and a standard 2 kilometer cell size and 1 kilometer terrain distance increment.


Radiofrequency Electromagnetic Field Exposure

The proposed KLTV-DT facilities were evaluated in terms of potential radio frequency (RF) energy exposure at ground level to workers and the general public. The radiation center for the proposed DTV antenna is located 314 meters above ground level with an ERP of 66 kW. A conservative relative field value of 0.2 was assumed for the calculation (see Figure 3). The calculated power density at a point 2 meters above ground level will not exceed 0.001 mW/cm<sup>2</sup>. This is less than 5% of the FCC's recommended limit of 0.2 mW/cm<sup>2</sup> for channel 7 for an “uncontrolled” environment.

Access to the transmitting site will be restricted and appropriately marked with warning signs. In the event that workers or other authorized personnel enter restricted areas or climb the tower, appropriate measures will be taken to assure worker safety with respect to radio frequency radiation exposure. Such measures include reducing the average exposure by

spreading out the work over a longer period of time, wearing "accepted" RFR protective clothing and/or RFR exposure monitors or scheduling work when the station is at reduced power or shut down. The proposed KLTV-DT operation appears to be otherwise categorically excluded from environmental processing.

It is noted that this statement only addresses the potential for radiofrequency electromagnetic field exposure. All other aspects of the environmental processing analysis will be or already have been provided to the FCC by the tower owner.

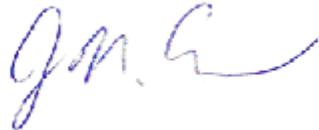


Jonathan N. Edwards  
du Treil, Lundin & Rackley, Inc.  
201 Fletcher Avenue  
Sarasota, Florida 34237  
(941) 329-6000  
JON@DLR.COM

June 18, 2008



Registration No. 1052125

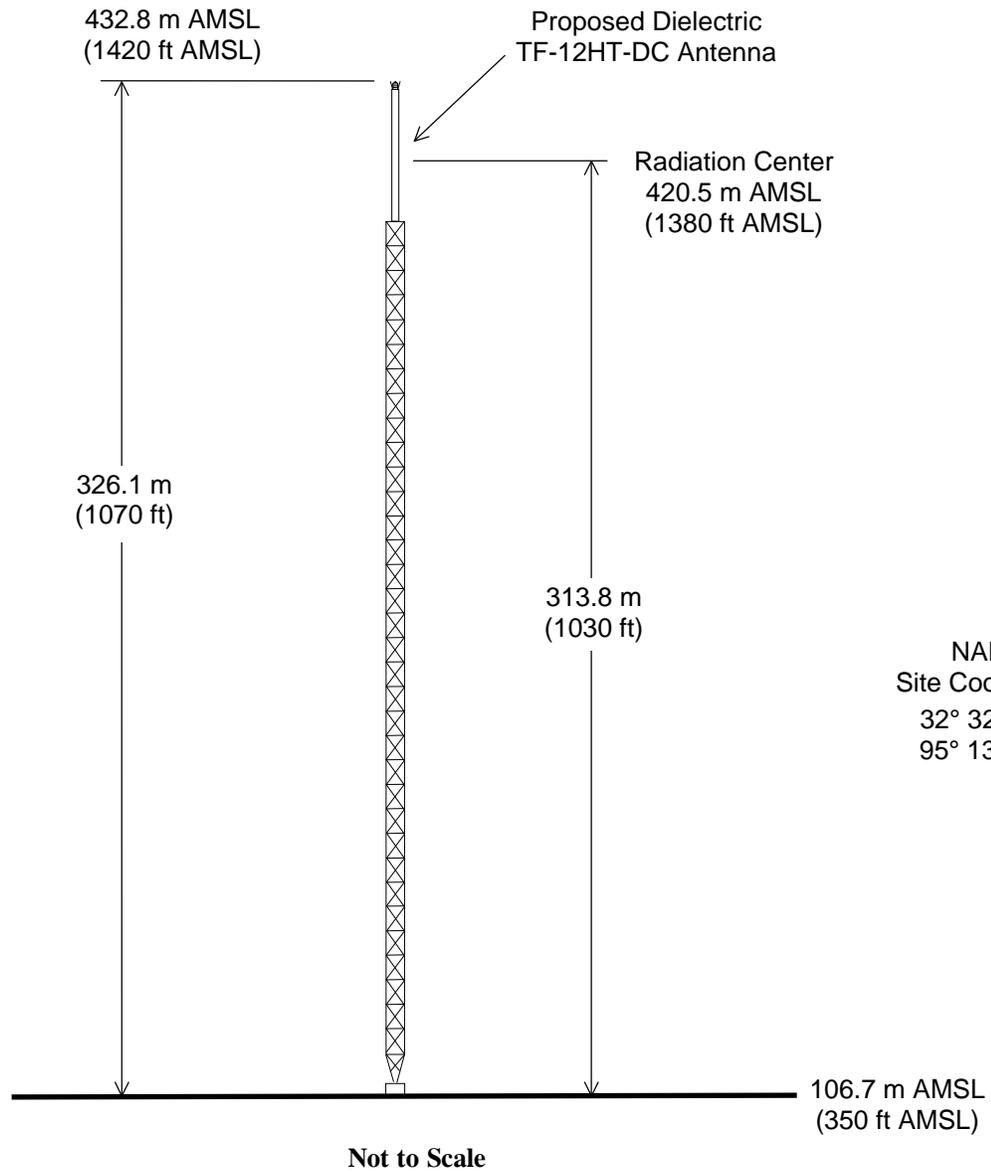

NAD 27  
Site Coordinates:  
32° 32' 23" N  
95° 13' 11" W

## ANTENNA AND SUPPORTING STRUCTURE


STATION KLTV-DT

TYLER, TEXAS

CH 7 66 KW 300 M

du Treil, Lundin & Rackley, Inc. Sarasota, Florida

Figure 2

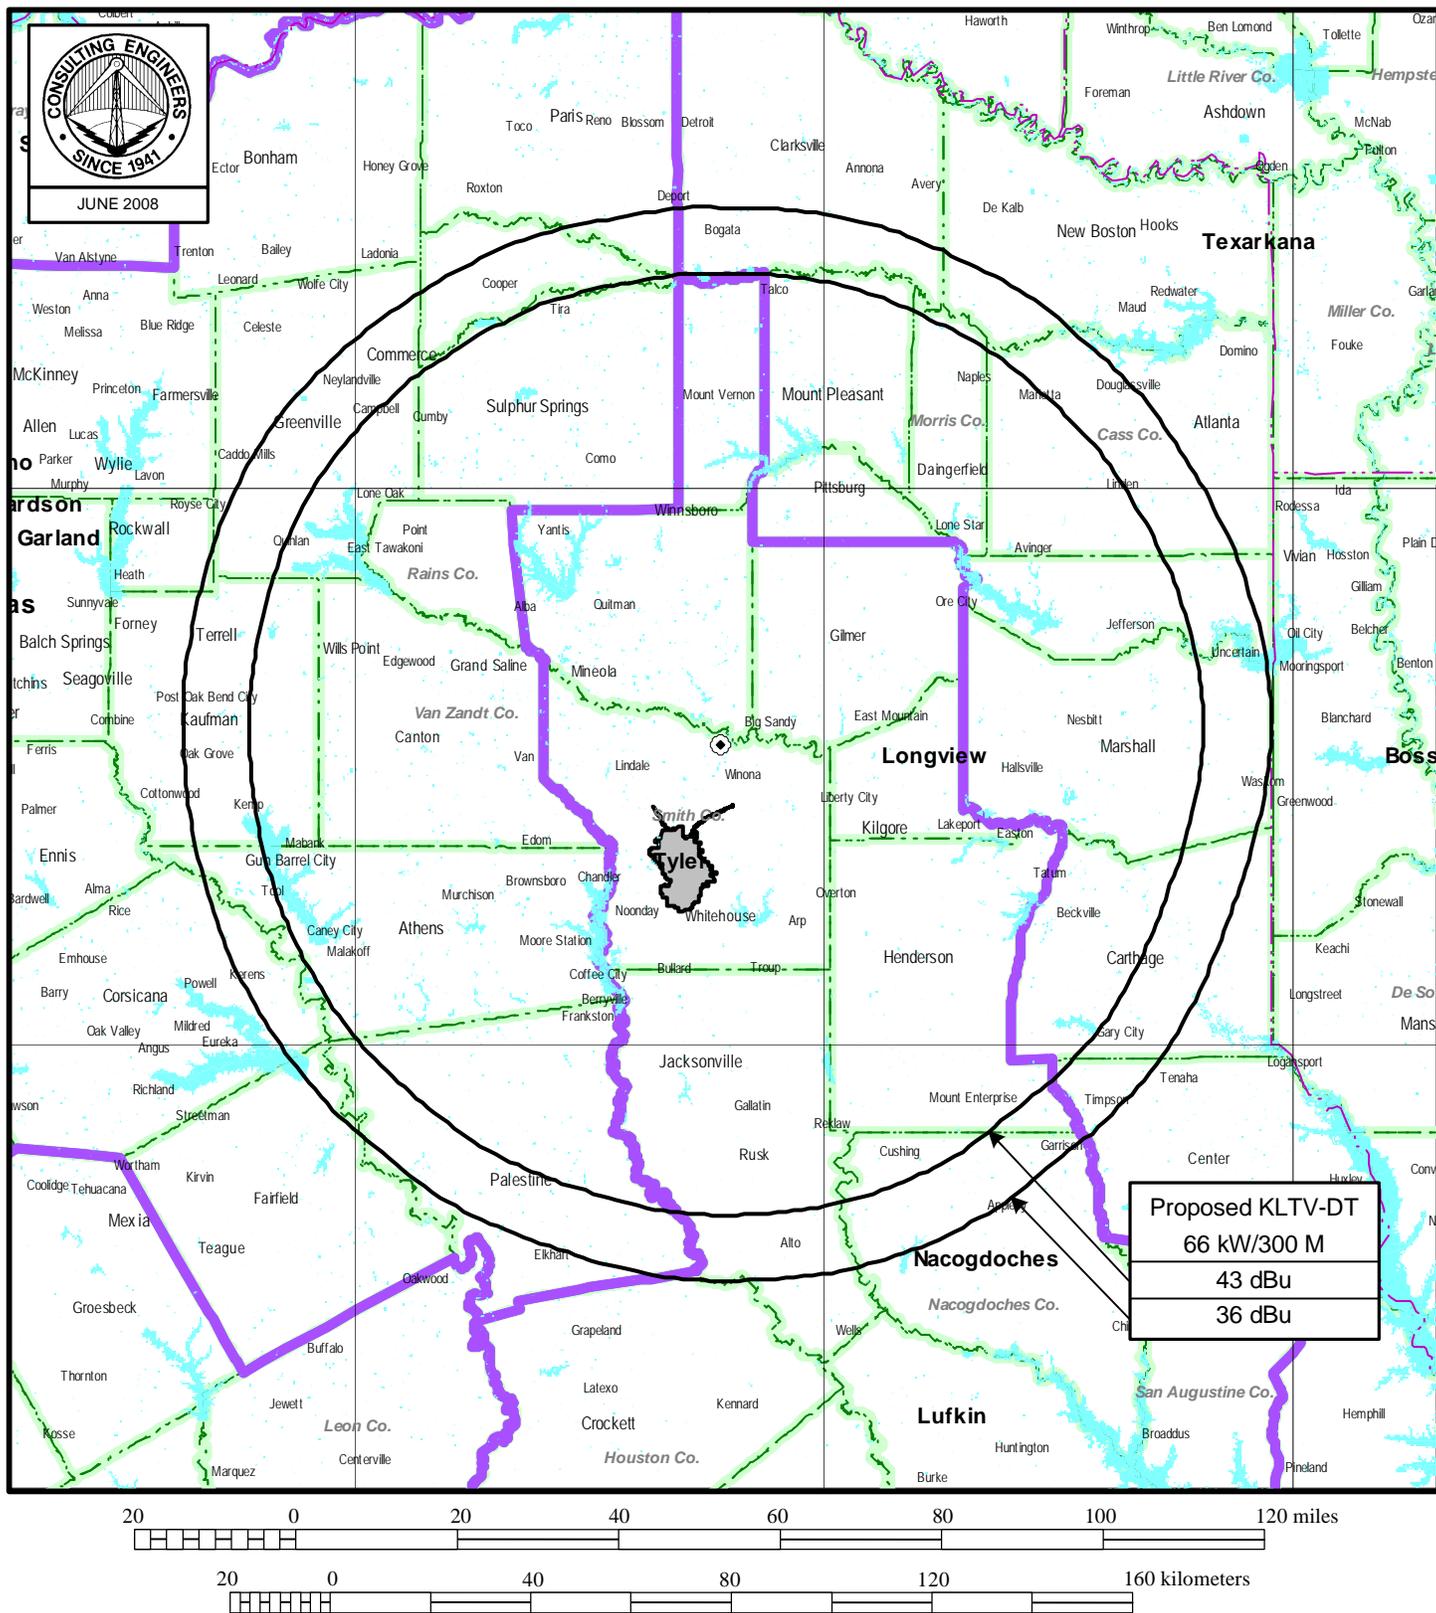

## PREDICTED COVERAGE CONTOURS

STATION KLTV-DT

TYLER, TEXAS

CH 7 66 kW 300 M

du Treil, Lundin & Rackley, Inc Sarasota, Florida



Proposal Number	<b>DCA-11393</b>	Revision:	<b>1</b>
Date	<b>13-Feb-06</b>		
Call Letters	<b>KLTV</b>	Channel	<b>7</b>
Location	<b>Tyler, TX</b>		
Customer	<b>Raycom</b>		
Antenna Type	<b>TF-12HT-DC</b>		

### ELEVATION PATTERN

RMS Gain at Main Lobe	<b>11.30 ( 10.53 dB )</b>	Beam Tilt	<b>0.75 deg</b>
RMS Gain at Horizontal	<b>10.50 ( 10.21 dB )</b>	Frequency	<b>177.00 MHz</b>
Calculated / Measured	<b>Calculated</b>	Drawing #	<b>12S110070-90</b>

