



ENGINEERING STATEMENT
OF
JOHN F.X. BROWNE, P.E.
IN SUPPORT OF
AN APPLICATION FOR CONSTRUCTION PERMIT
FOR
DISPLACEMENT AND DIGITAL "FLASHCUT"
W67AR
WILLSBORO, NY

Background

Mountain Lake Public Telecommunications Council (MLPTC) is the licensee of television translator station W67AR, Ch 67, (BLTT-19820503IG, Facility ID. 44028) at Willsboro, NY. MLPTC is applying for a construction permit to change its assigned channel to Ch 46 due to displacement (out-of-core) and also proposes to "flashcut" W67AR to digital operation on Ch 46.

Site and Tower

The tower is located at 44-24-13 N, 73-26-03 W (NAD27). This is an existing tower and does not require an ASR, nor notification to the FAA, as the overall height of the tower is 9.1 meters AGL. The transmitting antenna will be side-mounted in such a manner so as not to increase the overall height of the structure. This is the same site and tower that is specified in the current W67AR authorization.



Antenna and Power

The proposed antenna is a Scala 4DR-4-2HW directional radiator having a different pattern than the authorized antenna (4DR-4S); the rotation will be 55 degrees. The radiation center of the antenna will be at a height of 5m AGL, which is the height specified in the current authorization. The horizontal pattern and tabulation is included as Figure 1 and Figure 2. The digital ERP will be 0.182 kW and the 51 dBu F(50,90) contour will completely encompass the area of Willsboro, NY.

Interference

An interference study was conducted using the proposed parameters with software that emulates that used by the Commission. That study shows that there would not be more than 0.49% interference to any full-service NTSC station, DTV station or Class A station, nor more than 1.99% interference to any other low power station as required by Commission's Rules.

Environmental/RFR

This construction does not involve any of the conditions that require an Environmental Assessment as specified in 47 CFR Section 1.1311, therefore, further consideration is not required.

The additional ground level RFR contributed to the site by this proposal in public areas is calculated to be 0.009653 mW/cm², which is less than 5% of the MPE for public exposure (0.433 mW/cm²) at the proposed frequency.

B

MPLTC agrees to comply with the Commission's requirements regarding power adjustments or cessation of operation as may be necessary to ensure a compliant environment for worker access. Workers will also be encouraged to wear personal RFR monitors when on the structure. A locked security fence will enclose the tower base and appropriate signage warning of RFR hazards will be in place.


Certification

I hereby certify that the foregoing report or statement was prepared by me but may include work performed by others under my supervision or direction. The statements of fact contained therein are believed to be true and correct based on personal knowledge, information and belief unless otherwise stated; with respect to facts not known of my own personal knowledge, I believe them to be true and correct based on their origin from sources known to me to be generally reliable and accurate. I have prepared this document with due care and in accordance with applicable standards of professional practice.



John F.X. Browne, P.E.

March 21, 2006

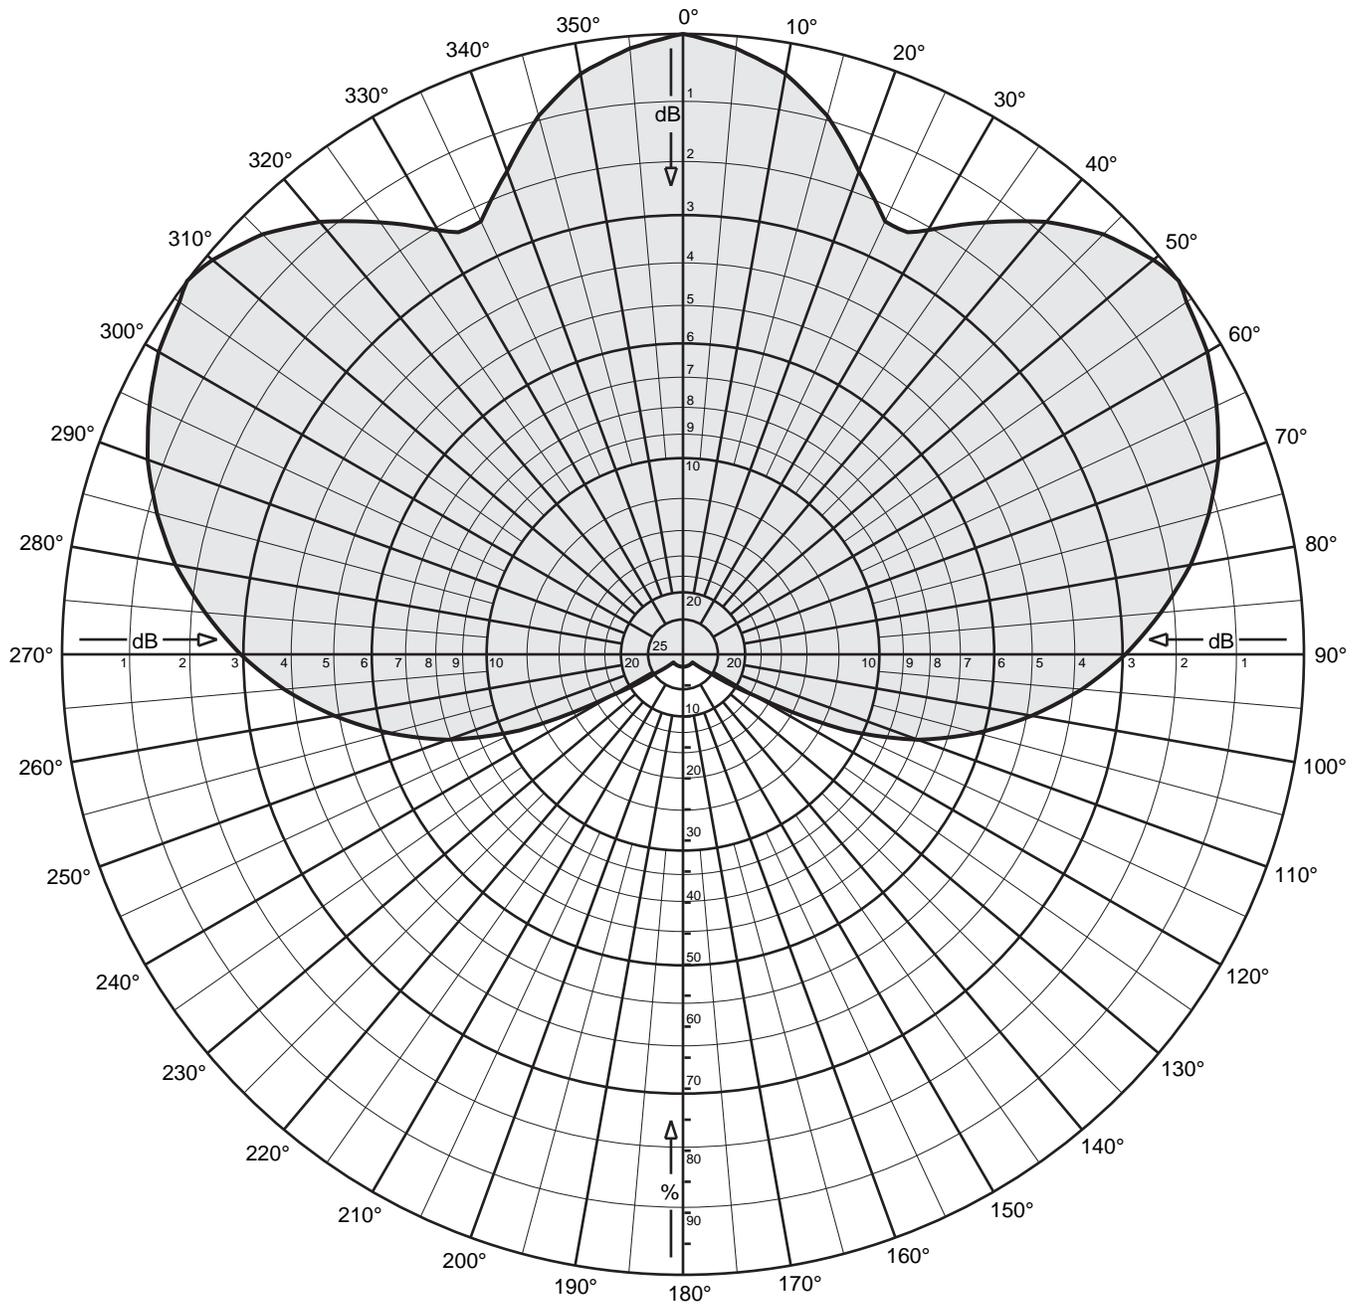

4DR-4-2HW

Max Gain: 6 dBd

power-x: 3.98

Horizontal Polarization

Horizontal Plane Pattern

KATHREIN
SCALA DIVISION
 Post Office Box 4580 Phone:(541)779-6500
 Medford, OR 97501 (USA) Fax:(541)779-3991
<http://www.kathrein-scala.com>



4DR-4-2HW

power-x: 3.98

Horizontal Polarization

Horizontal Plane Pattern

Max Gain: 6 dBd

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
0	1.000	0.00	6.00	3.98	180	0.020	-33.98	-27.98	0.00
10	0.950	-0.45	5.55	3.59	190	0.020	-33.98	-27.98	0.00
20	0.829	-1.63	4.37	2.73	200	0.020	-33.98	-27.98	0.00
30	0.789	-2.05	3.95	2.48	210	0.020	-33.98	-27.98	0.00
40	0.910	-0.82	5.18	3.30	220	0.020	-33.98	-27.98	0.00
50	0.989	-0.10	5.90	3.89	230	0.020	-33.98	-27.98	0.00
60	0.975	-0.22	5.78	3.78	240	0.132	-17.56	-11.56	0.07
70	0.917	-0.75	5.25	3.35	250	0.403	-7.90	-1.90	0.64
80	0.830	-1.62	4.38	2.74	260	0.570	-4.88	1.12	1.29
90	0.712	-2.94	3.06	2.02	270	0.712	-2.94	3.06	2.02
100	0.570	-4.88	1.12	1.29	280	0.830	-1.62	4.38	2.74
110	0.403	-7.90	-1.90	0.64	290	0.917	-0.75	5.25	3.35
120	0.132	-17.56	-11.56	0.07	300	0.975	-0.22	5.78	3.78
130	0.020	-33.98	-27.98	0.00	310	0.989	-0.10	5.90	3.89
140	0.020	-33.98	-27.98	0.00	320	0.910	-0.82	5.18	3.30
150	0.020	-33.98	-27.98	0.00	330	0.789	-2.05	3.95	2.48
160	0.020	-33.98	-27.98	0.00	340	0.829	-1.63	4.37	2.73
170	0.020	-33.98	-27.98	0.00	350	0.950	-0.45	5.55	3.59