

Exhibit 16.1

Compliance with Radiofrequency Radiation Guidelines

The RF Compliance Study for this proposed CH251D, Tuscola, IL modification has been evaluated for human exposure to non-ionizing radiofrequency radiation at the transmitter site. The potential for human exposure to non-ionizing radiofrequency radiation at the proposed transmitter site has been evaluated with regards to §1.1310 concerning contributions for single source sites. There are no other known sources of AM, FM or TV RF radiation within 315 meters of this site.


The proposed facility will operate on 98.1 MHz with a maximum effective radiated power (ERP) of 0.24 kW circular polarization. The facility will operate with a one element Nicom BKG-77-DA directional antenna. The directional antenna will be mounted 6.7 meters above ground level. The radiating element consists of a "Crossed V" antenna design. Therefore for purposes of this study, an EPA type 2 element as defined from FCC program FM Model Version 2.10b has been employed.

This site has been evaluated for compliance with the FCC guidelines concerning human exposure to radiofrequency radiation. The standards employed are detailed in OET Bulletin No. 65 (Edition 97-01). Software packages were used to determine the individual contribution of the station. FM radiofrequency radiation levels were predicted using both the array pattern, the calculations of which are based on the number of bays in the antenna and wavelength spacing between the bays, and the element pattern.

To evaluate the total exposure to non-ionizing radio-frequency radiation with regards to the single source contribution rules, the individual contribution may be expressed in directly in $\mu\text{W}/\text{cm}^2$ units relative to the maximum permissible uncontrolled environment limit of $200 \mu\text{W}/\text{cm}^2$. If the resulting contribution is less than or equal to $200 \mu\text{W}/\text{cm}^2$, the exposure is concluded to be within the guidelines of OET Bulletin No. 65 (Edition 97-01) and §1.1310 for the more restrictive uncontrolled limit. Protection of the uncontrolled limit ($200 \mu\text{W}/\text{cm}^2$) implies protection of the controlled limit ($1000 \mu\text{W}/\text{cm}^2$).

Inspection of the graph below shows the maximum contribution for the uncontrolled environment to be less than $200 \mu\text{W}/\text{cm}^2$ as set forth by §1.1310. Therefore the facility is in compliance with FCC guidelines. In addition to the protection afforded by the proposed antenna height above ground, the facility is or will be properly marked with signs, and/or entry to the facility will be restricted by means of fencing with locked doors and/or gates. Any other means that may be required to protect employees and the general public will be employed.

In the event work is required in proximity to the antenna(s) such that the person or persons working in the area will be potentially exposed to fields in excess of the current guidelines, an agreement signed by all broadcast parties at the site will be in effect for the offending transmitter(s) to reduce power, or cease operation during the critical period.

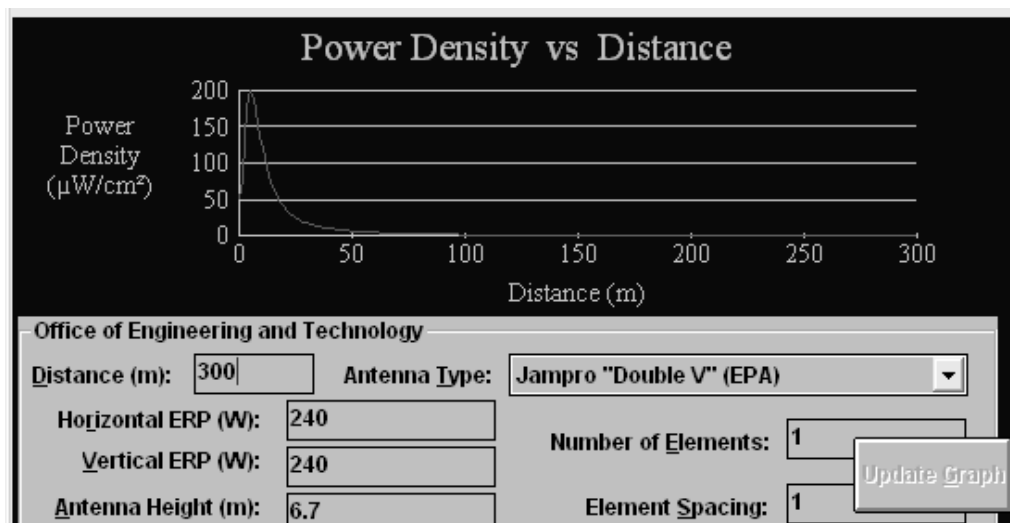

The Max Power Density was found to be

199.503251145411 $\mu\text{W}/\text{cm}^2$ at 5 meters.