

EXHIBIT 11.1

DESCRIPTION OF PROPOSED ANTENNA SYSTEM

ANTENNA SYSTEM

1. The daytime antenna system consists of one (1) vertical, guyed, uniform cross section steel tower mounted above a concrete base pier and insulator. The daytime non-directional tower is also tower two of the three tower nighttime antenna array. All towers are identical. Each tower stands 73.4° or 48.2 meters above a 1.2 meter base pier and insulator for a height of 49.4 meters AGL without obstruction lighting. No obstruction lighting is required. Given the site elevation of 207.3 meters AMSL, the top of the towers will stand at 256.7 meters AMSL. Antenna Structure Registration Numbers have been included in **Exhibit 11.2**.
2. The existing ground system consists of 120 buried copper radials, extending 59.01 meters (193.6 feet) in length, about the base of each tower. Radials run the entire length except where shortened to terminate at property boundaries or the transverse copper strap running midway between the towers. The material used for the radials is #10 AWG, soft drawn copper wire or equivalent.
3. The theoretical efficiency for the proposed daytime operation will be 294.64 mV/m/kW at 1 km. Given the daytime operating power of 50.0 kW, the theoretical radiation will be 2083.4 mV/m at 1 km.


Nighttime operation will remain unchanged.

Exhibit 11.2

Vertical Plan of Antenna System

This site is located at the intersection of Loeb and Novotny Rds.
1.9 miles SSE of Charlevoix, Michigan.


Center of Array
NL: 45° 16' 22"
WL: 85° 15' 08"

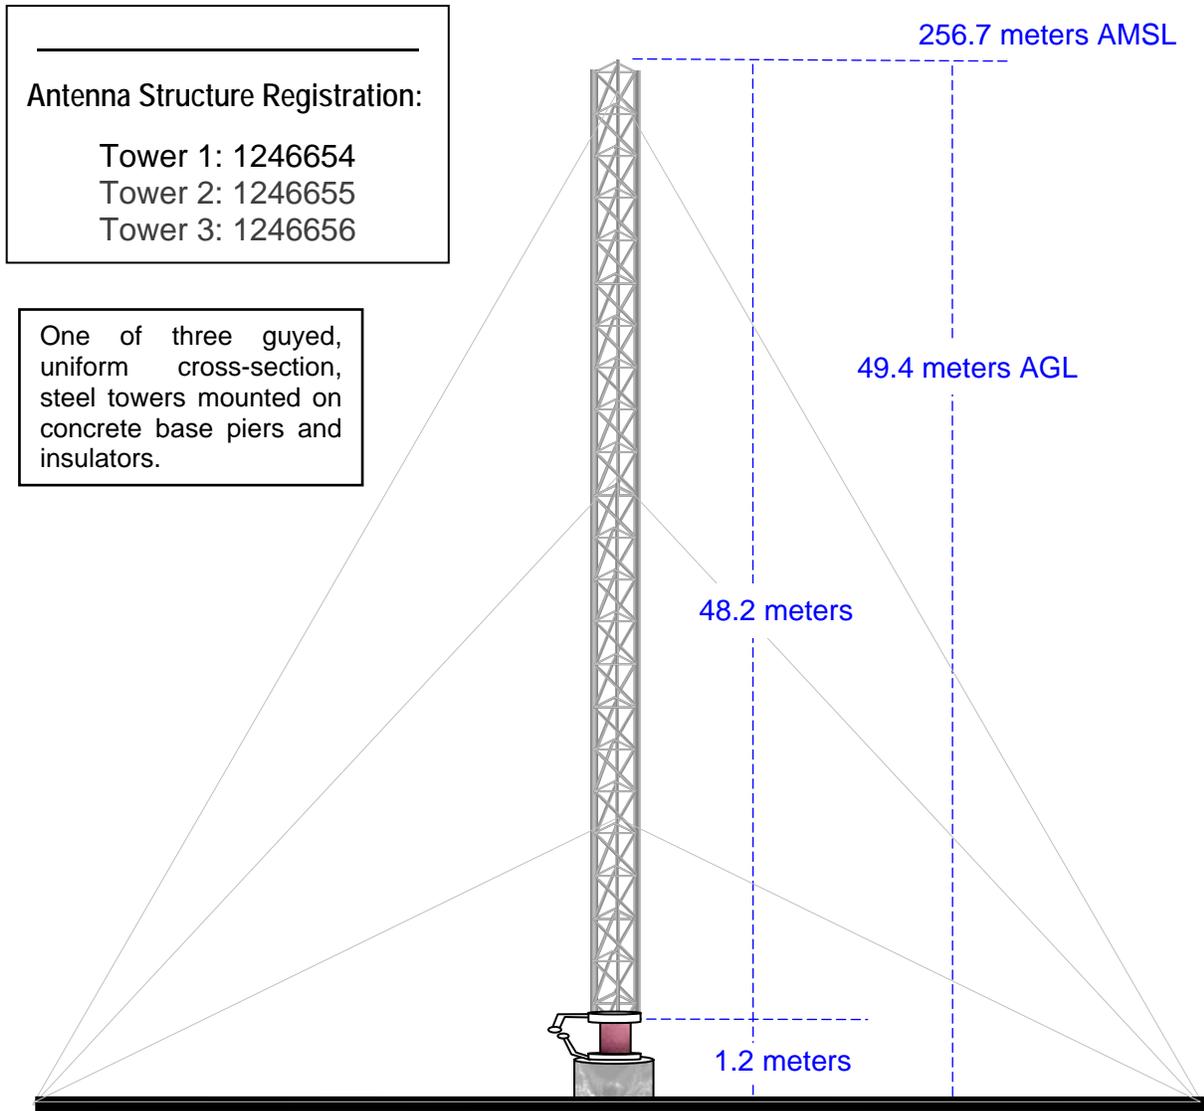

Ground Elevation: 207.3 meters
Drawing is not to Scale

MUNN-REESE, INC.
Broadcast Engineering Consultants
Coldwater, MI 49036

Exhibit 11.3 – Horizontal Plat of Antenna Array

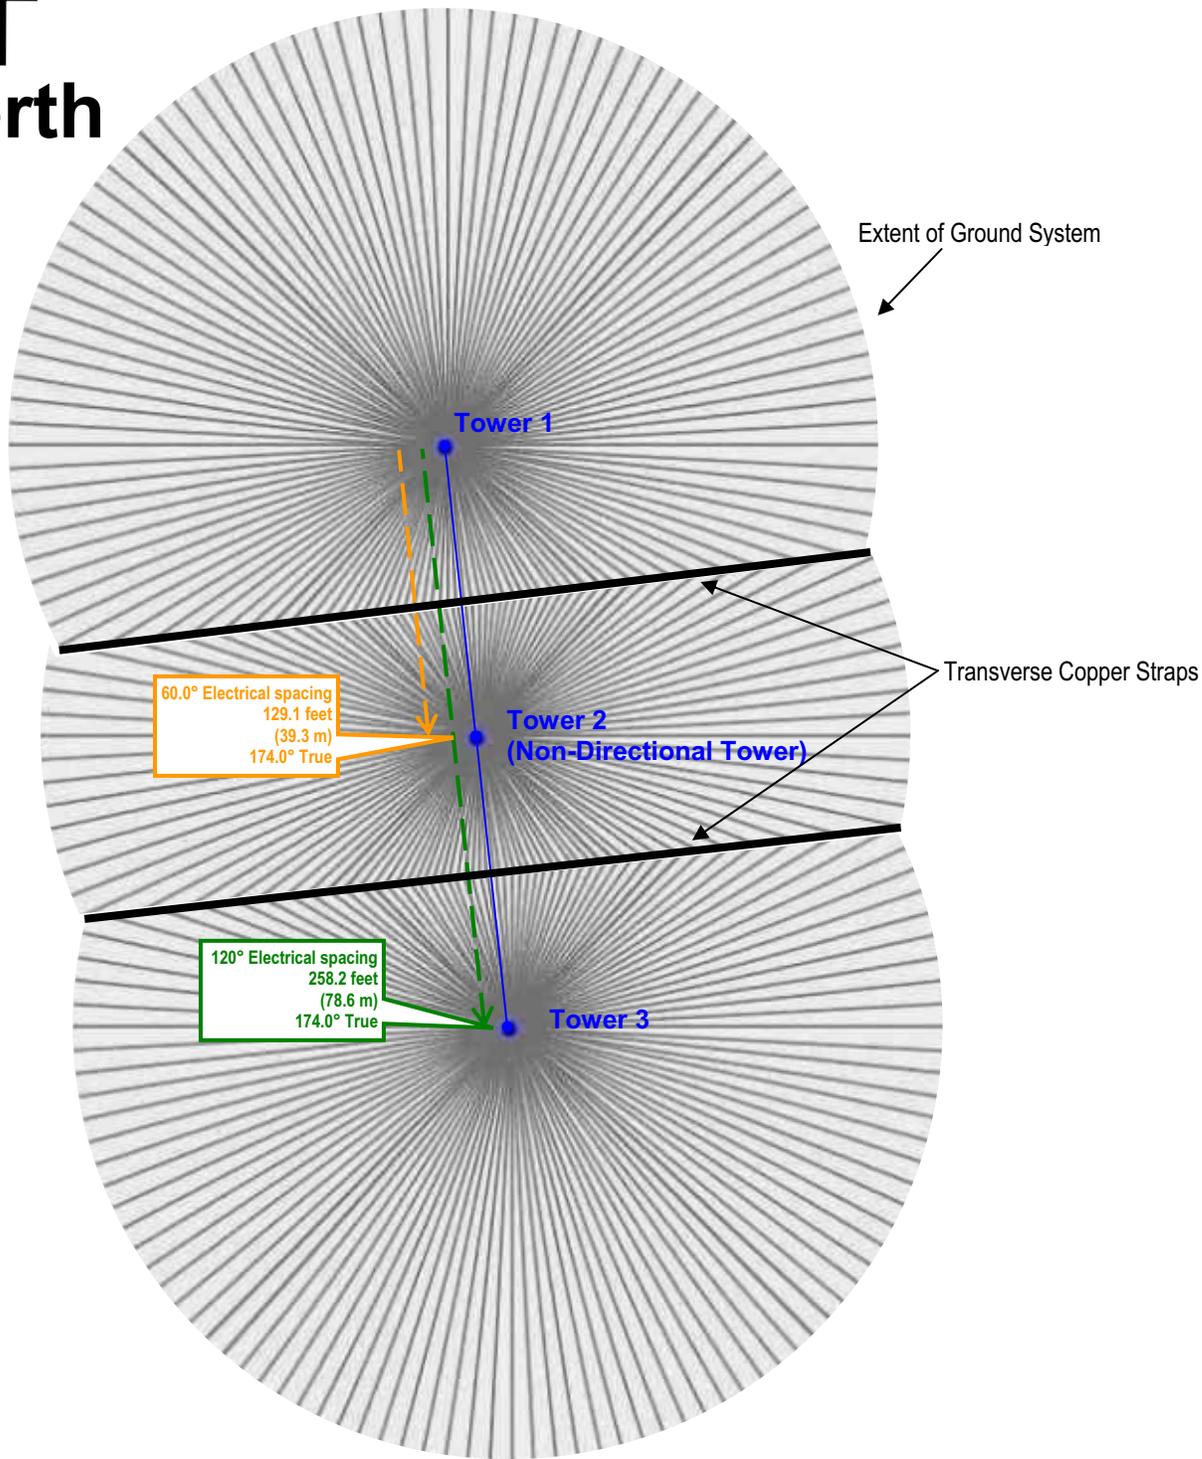


The proposed ground system consists of 120 buried copper radials, extending 59.0 meters in length, about the base of the towers except where shortened to terminate at property boundaries. The material used for the radials will be #10 AWG, soft drawn copper wire

Exhibit 11.4 Topographic Map of Existing Site

Existing Site Coordinates

45° 16' 22"
85° 15' 08"
NAD '27

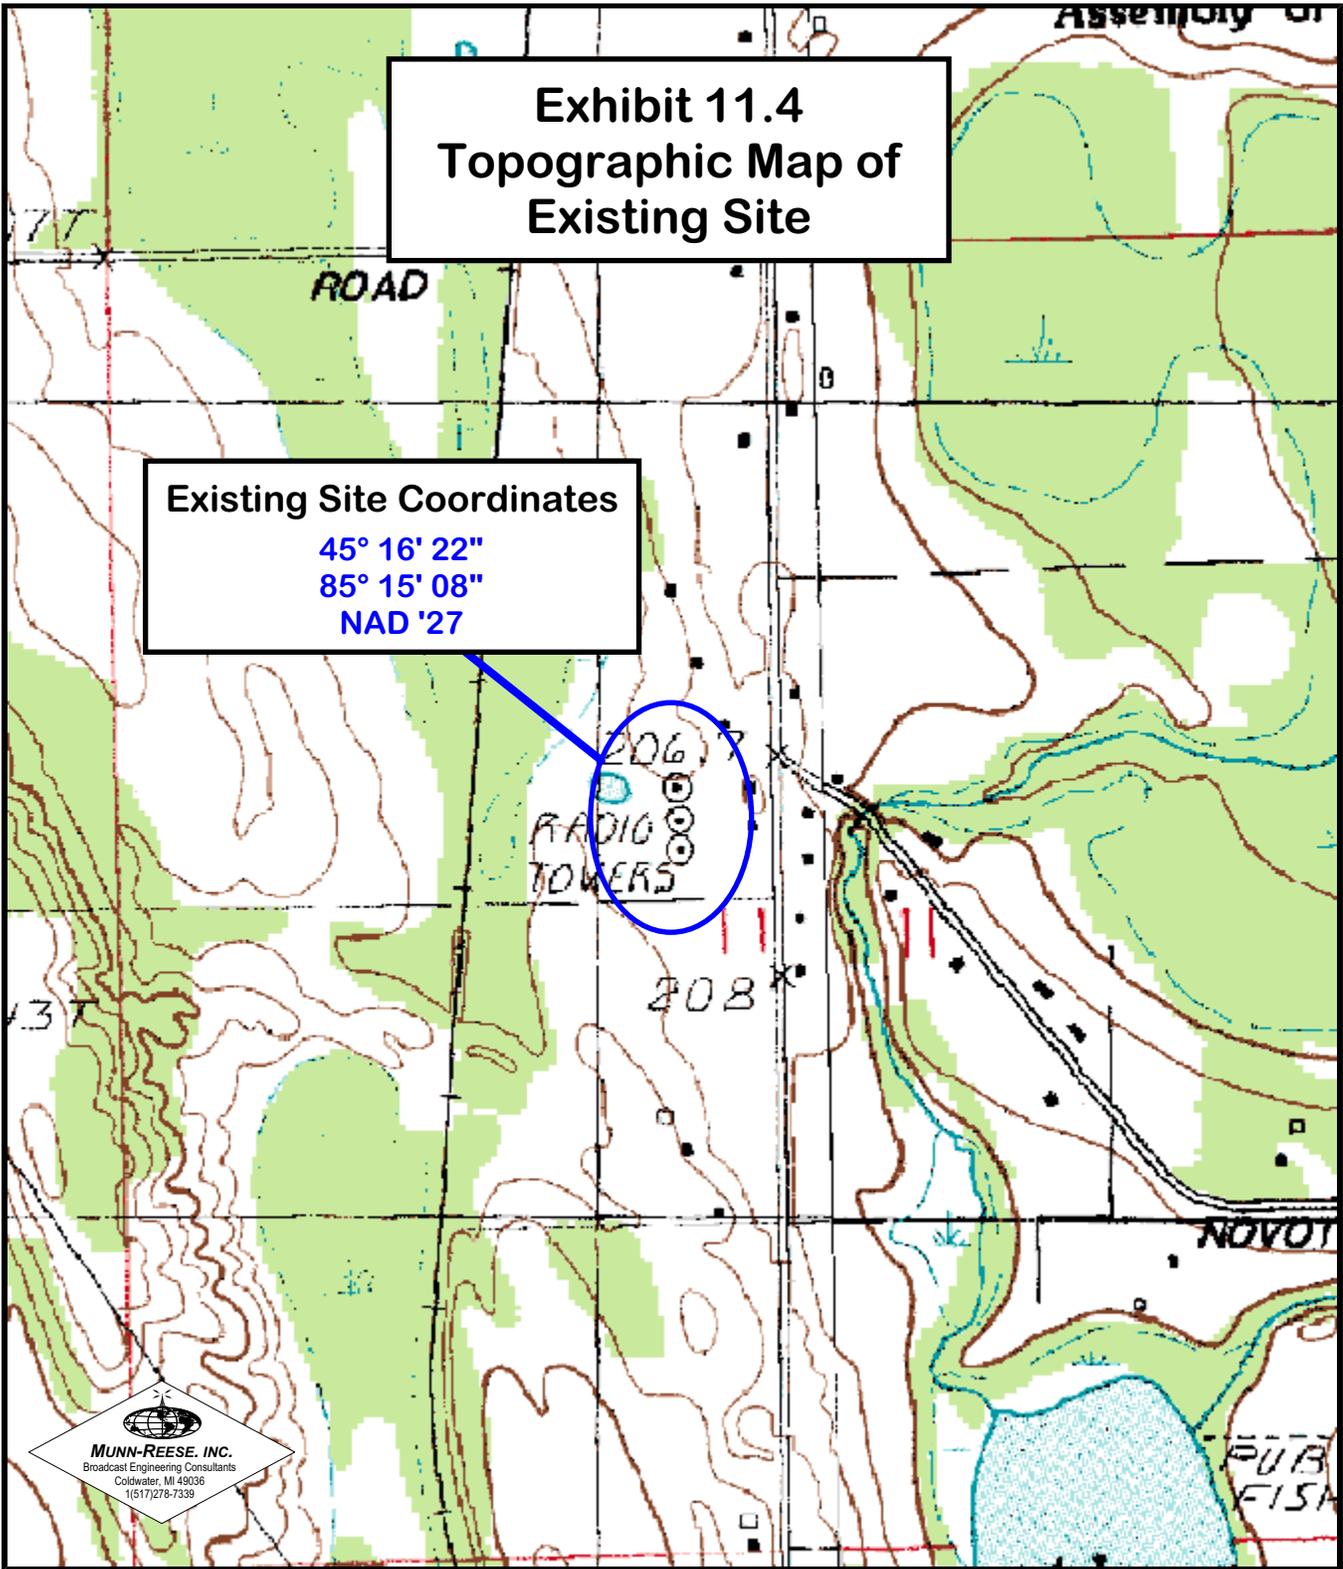

Kilometers



Miles



Charlevoix, MI
USGS 7.5 minute
Quadrangle

**Exhibit 11.5
Photograph of
Existing Site**

Tower 1

Tower 2

Tower 3




Photograph Taken April 27, 1998



WMKT.L
 Licensed Operation
 Freq: 1270 kHz
 Class: B
 Latitude: 45-16-22 N
 Longitude: 085-15-08 W
 Power: 27 kW
 RMS: 294.64 mV/m @1km
 # Towers: 1
 # Augs: 0

Exhibit 10.6a
Present Daytime
Service Contours

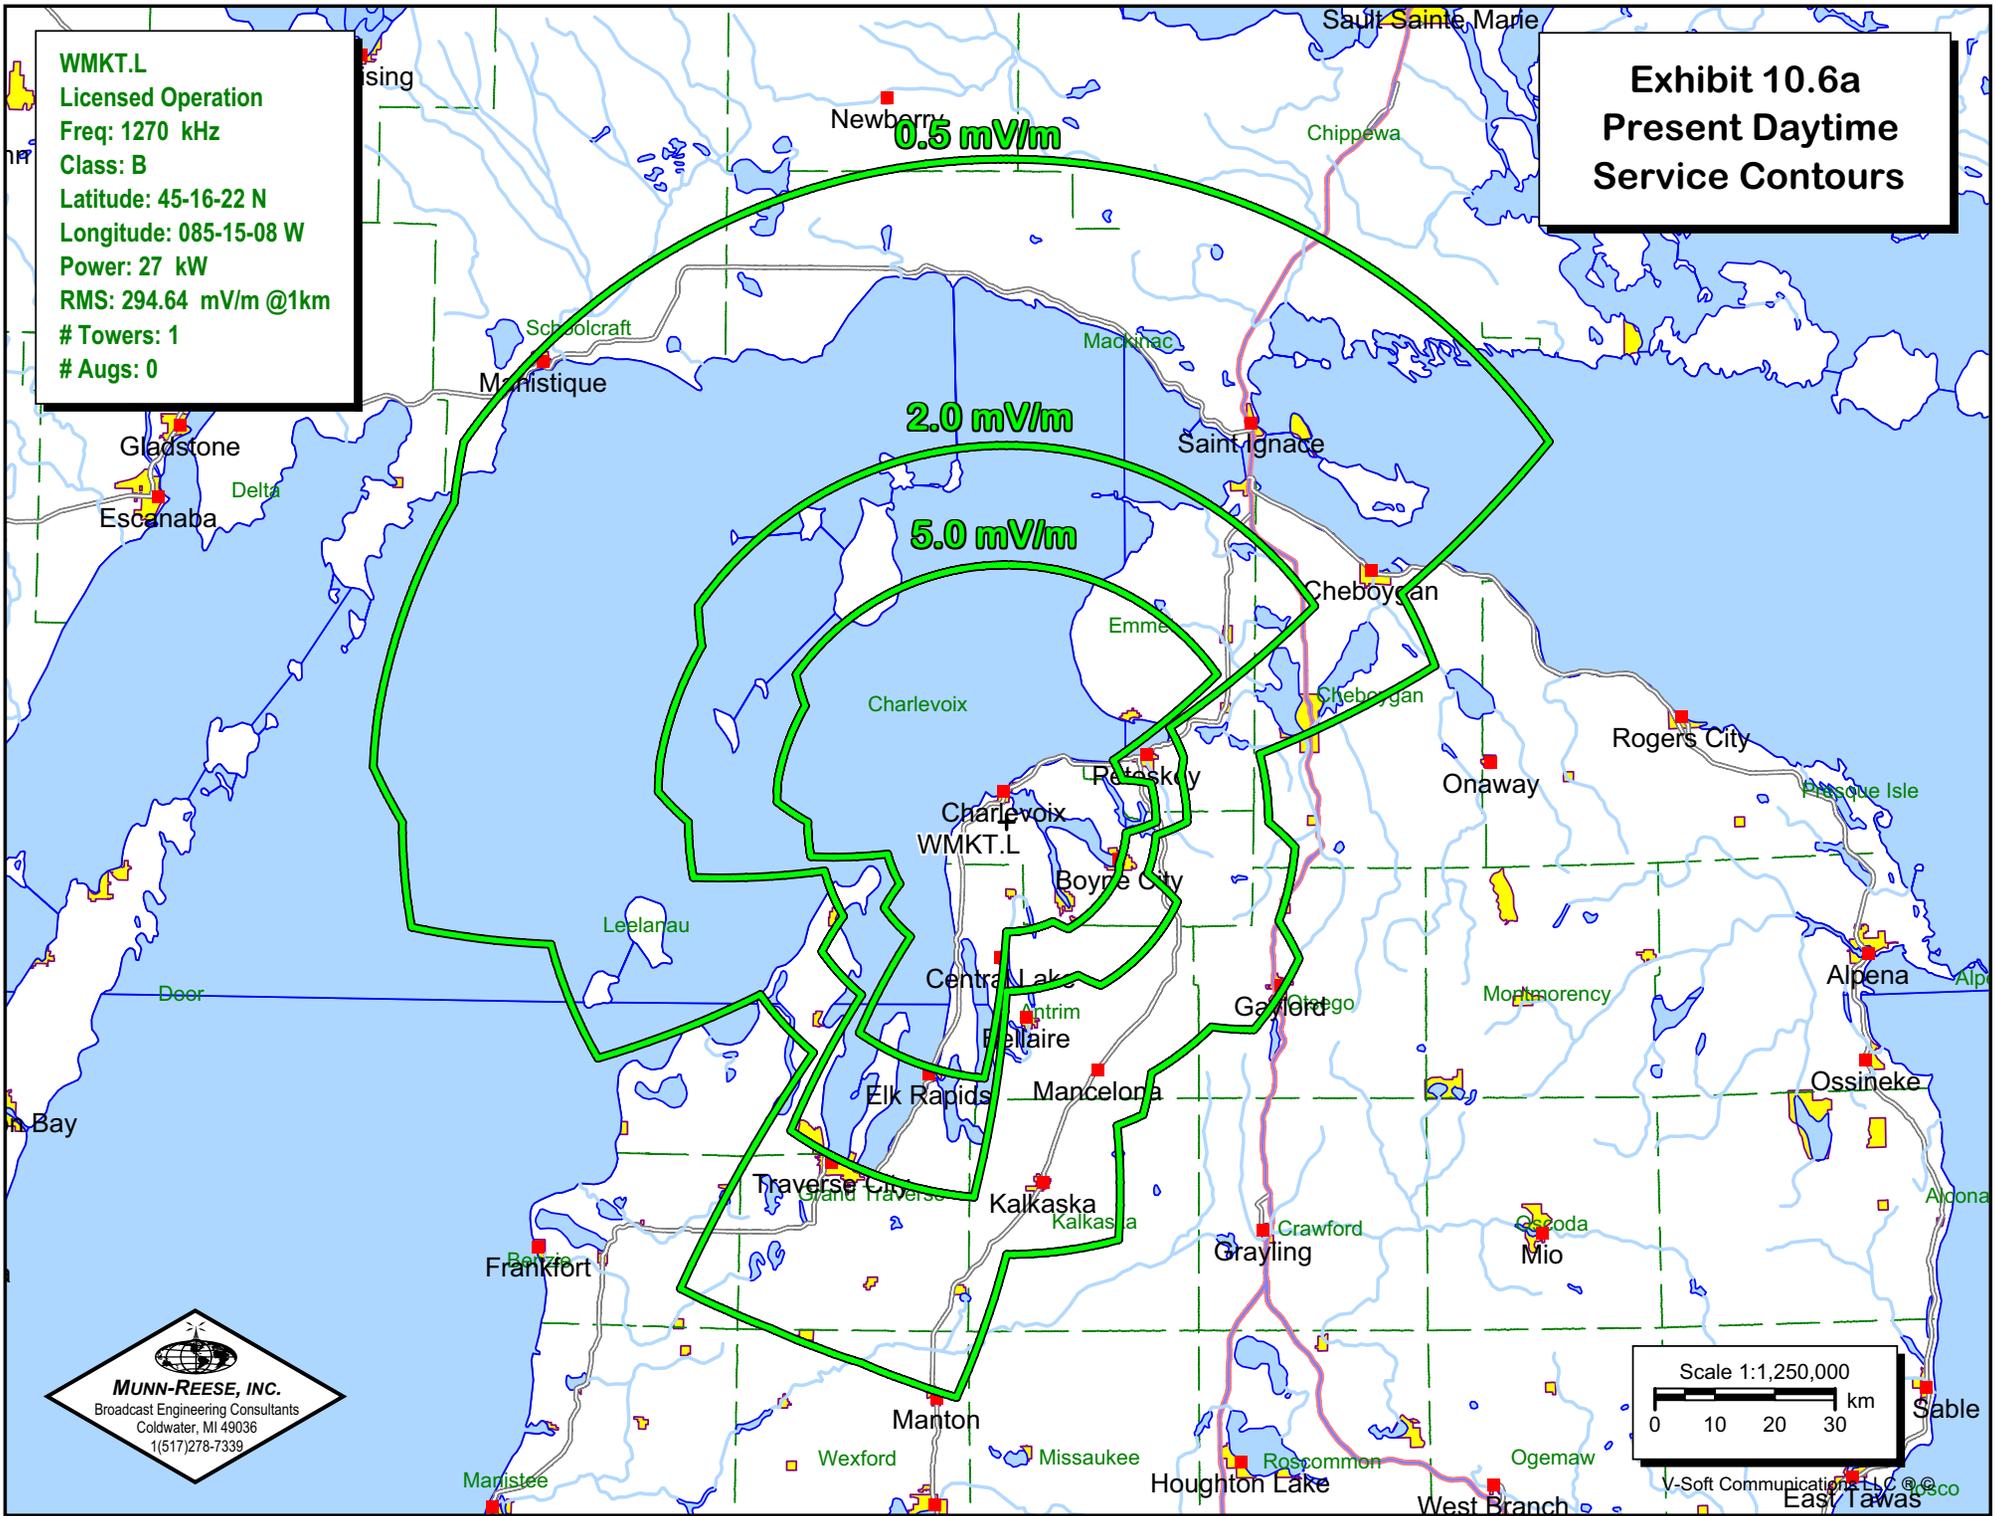




MUNN-REESE, INC.
 Broadcast Engineering Consultants
 Coldwater, MI 49036
 1(517)278-7339

Scale 1:1,250,000
 0 10 20 30 km

V-Soft Communications LLC © 2008
 East Tawas

WMKT.P
Proposed Operation
Freq: 1270 kHz
Class: B
Latitude: 45-16-22 N
Longitude: 085-15-08 W
Power: 50 kW
RMS: 294.64 mV/m @1km
Towers: 1
Augs: 0

Exhibit 10.6b
Proposed Daytime
Service Contours

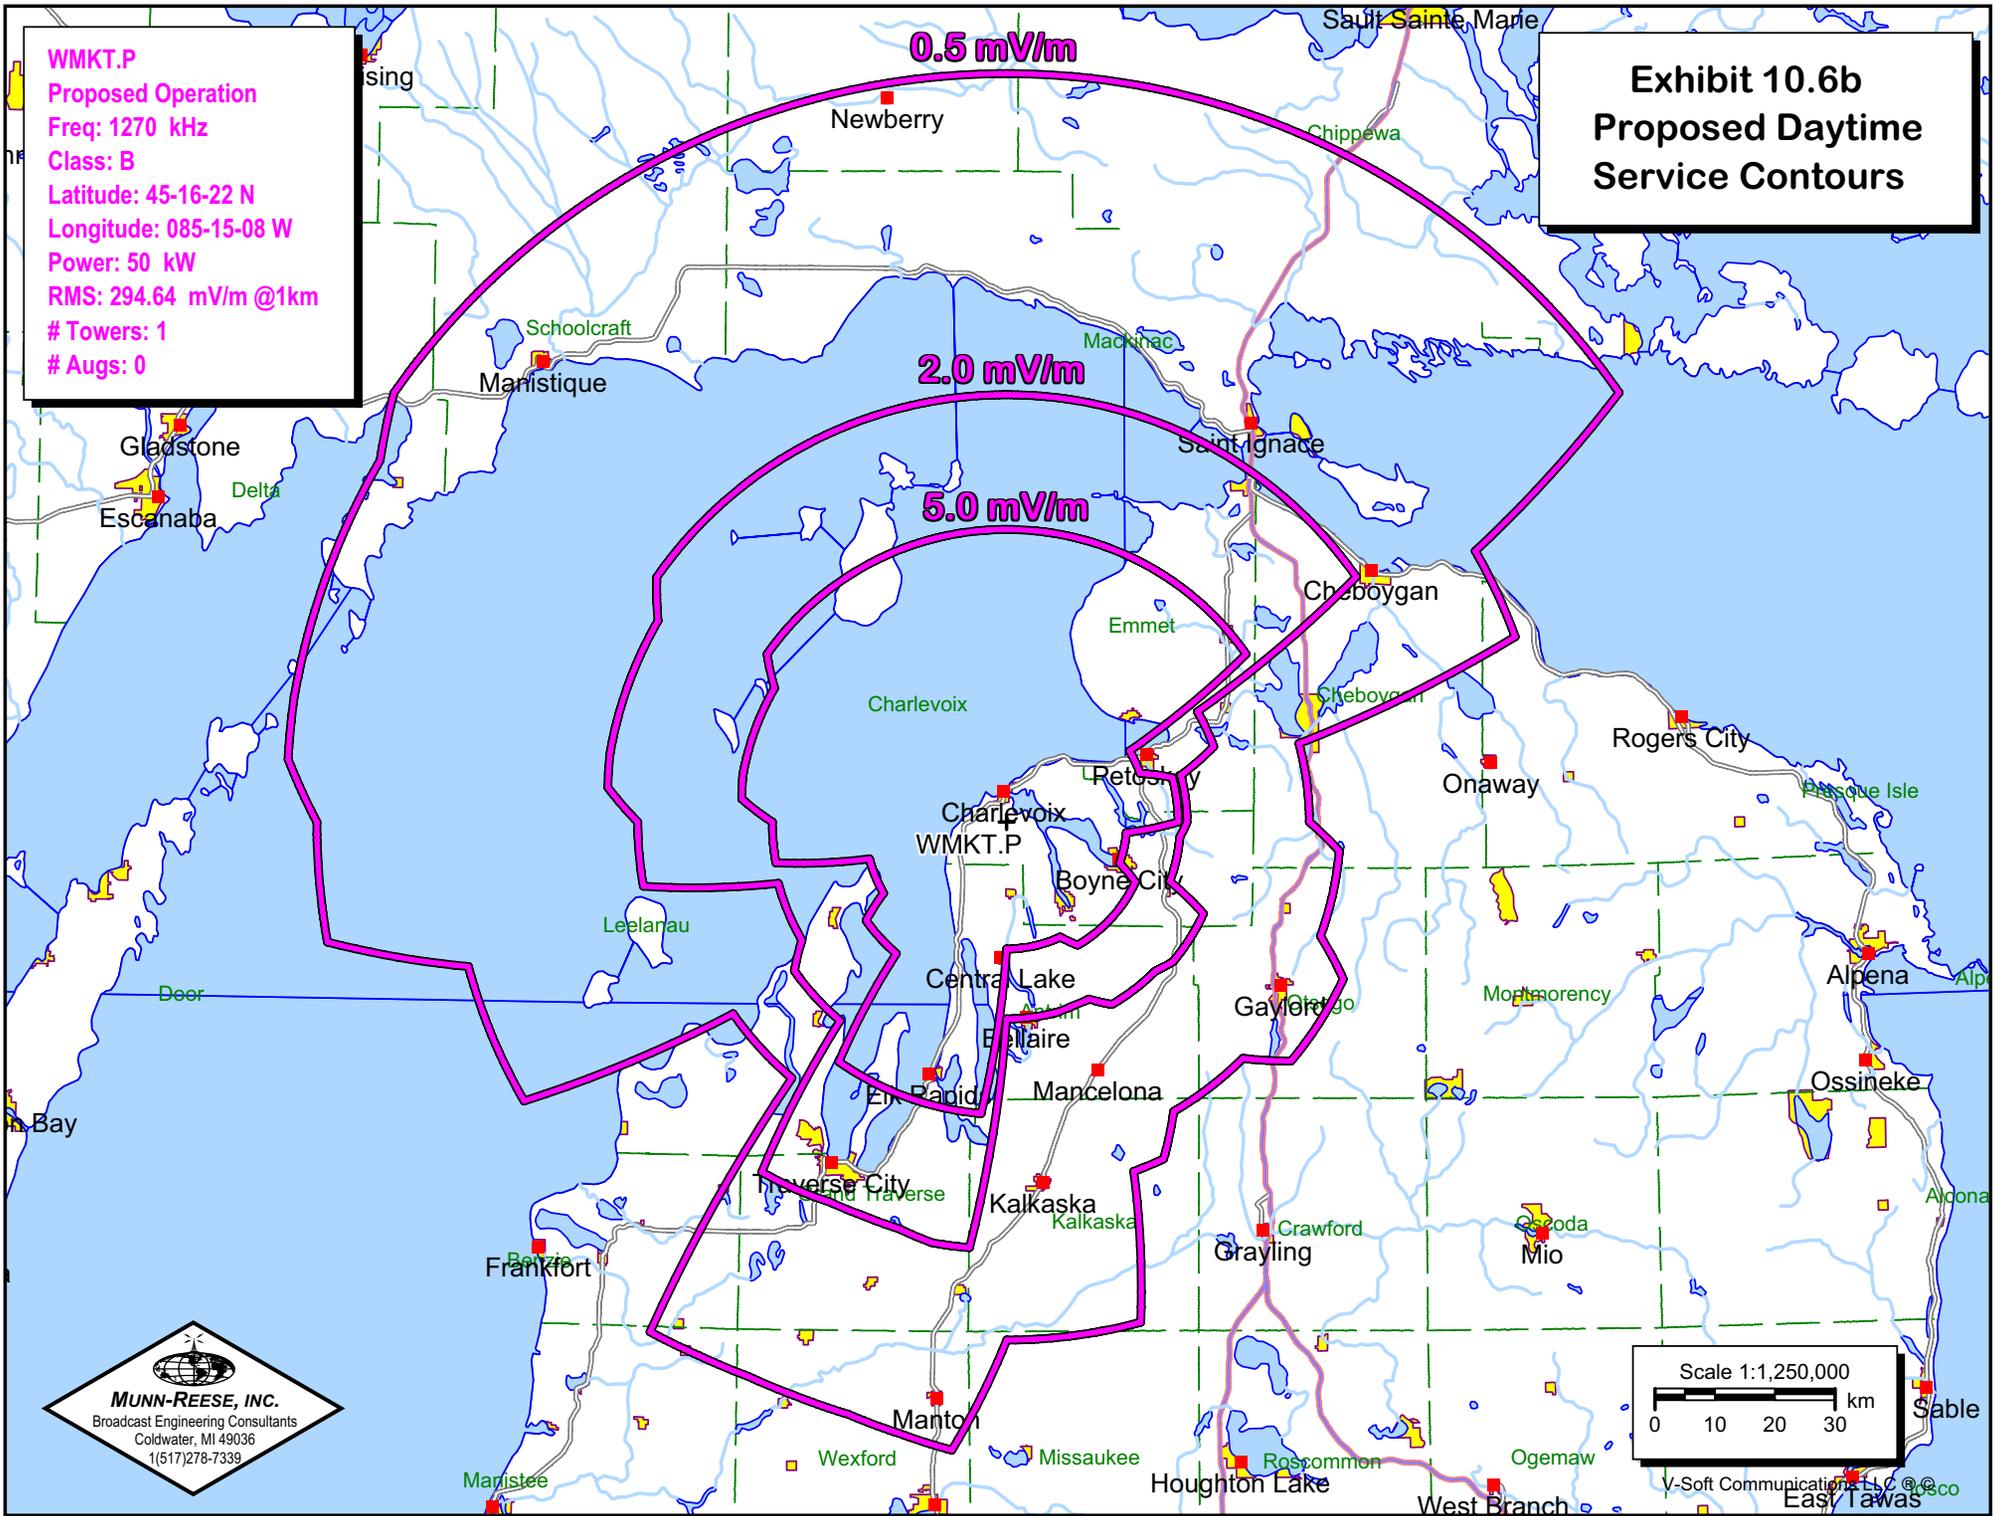

V-Soft Communications LLC © 2010
East Tawas

POPULATION REPORTS ARE BASED ON POPULATION CENTROID DATA AS TAKEN FROM THE U.S. CENSUS 2000 DATUM.

Exhibit 10.7 Present & Proposed 1.0 V/m "Blanket Contours" WMKT - Charlevoix, MI

Population Report

Station: WMKT.L
Licensed Operation
Contour: 1000.0 mV/m
Total Population: 311

Contour: 25.0 mV/m
Total Population: 11,047

Population Report

Station: WMKT.P
Proposed Operation
Contour: 1000.0 mV/m
Total Population: 454

Contour: GW 25.0 mV/m
Total Population: 13,647

