


Dielectric

Date	19-Jun-98	Channel	17
Call Letters	KPHO-DT		
Location	Phoenix, AZ		
Customer			
Antenna Type	TFU-26DSC C170		

AZIMUTH PATTERN

Gain	1.70	(2.30 dB)
Calculated / Measured	Calculated	

Frequency	491.00 MHz
Drawing #	C170

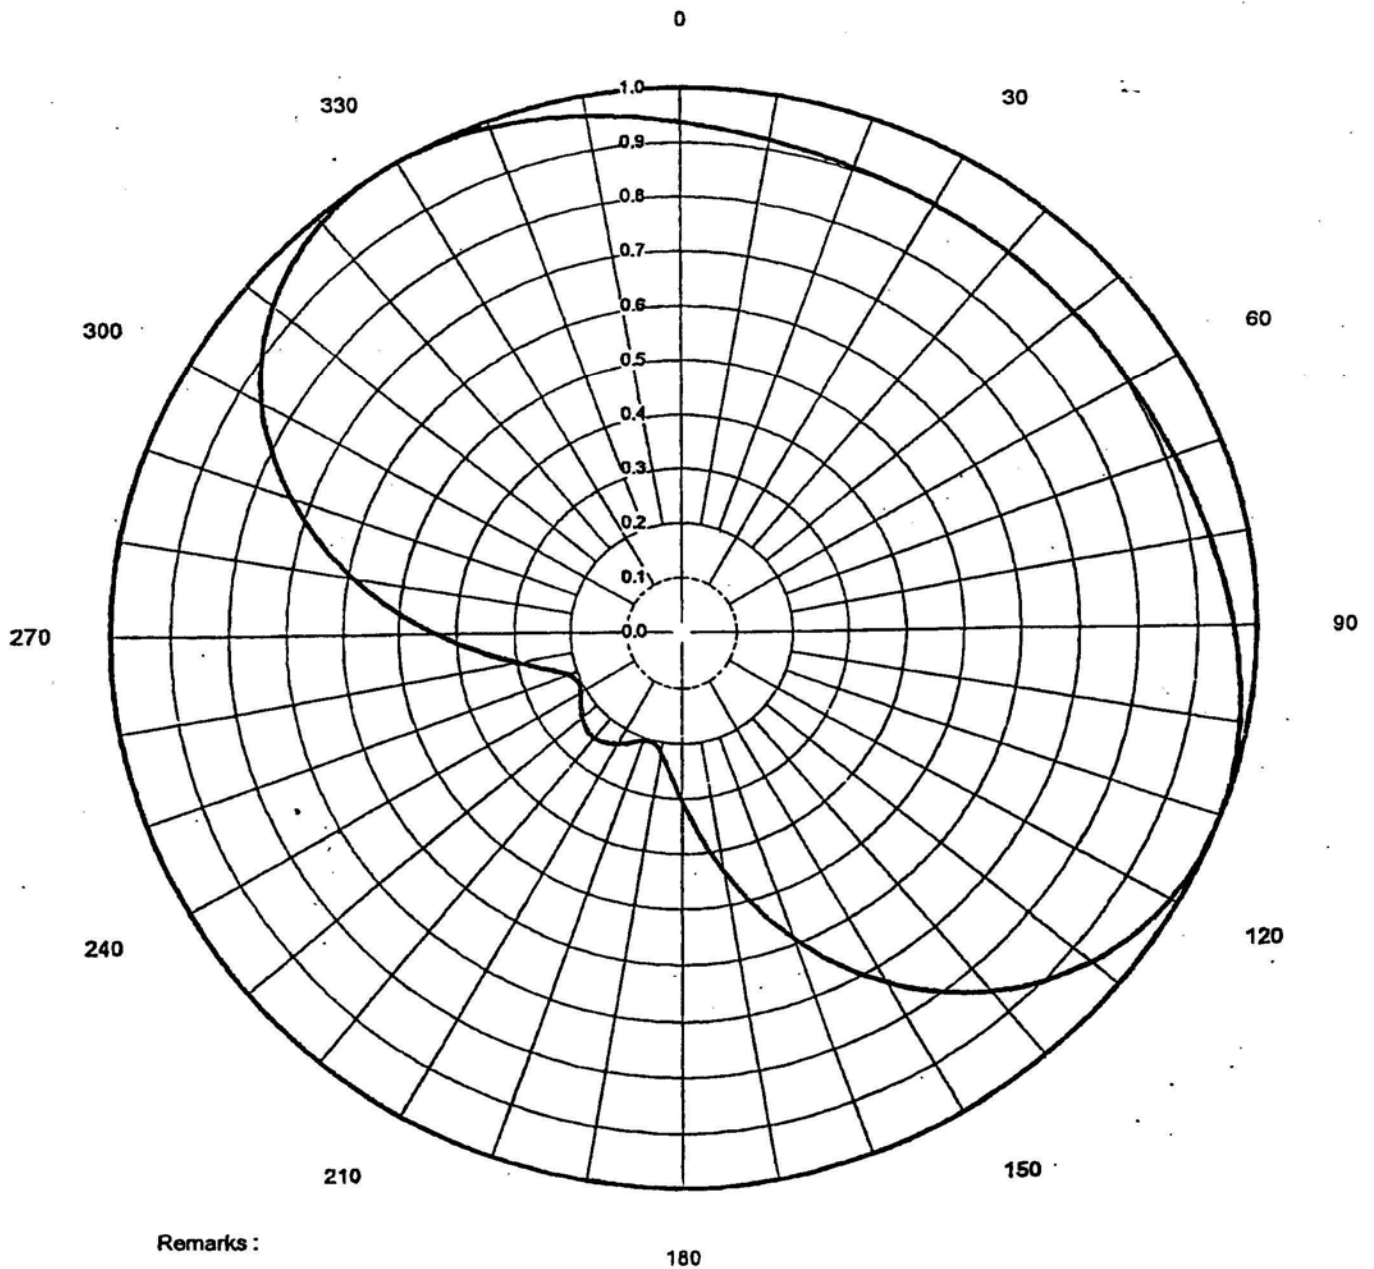

Dielectric

Date 19-Jun-98
 Call Letters KPHO-DT
 Location Phoenix, AZ
 Customer
 Antenna Type TFU-26DSC C170

Channel 17

TABULATION OF AZIMUTH PATTERN

Azimuth Pattern Drawing #: C170


Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field
0	0.936	45	0.900	90	0.863	135	0.901	180	0.302	225	0.241	270	0.437	315	0.968
1	0.934	46	0.900	91	0.965	136	0.893	181	0.290	226	0.240	271	0.451	316	0.973
2	0.932	47	0.900	92	0.968	137	0.883	182	0.280	227	0.238	272	0.466	317	0.977
3	0.930	48	0.900	93	0.971	138	0.874	183	0.269	228	0.236	273	0.482	318	0.981
4	0.928	49	0.900	94	0.973	139	0.864	184	0.260	229	0.234	274	0.497	319	0.984
5	0.926	50	0.900	95	0.976	140	0.854	185	0.251	230	0.232	275	0.512	320	0.987
6	0.924	51	0.901	96	0.978	141	0.843	186	0.243	231	0.229	276	0.527	321	0.990
7	0.922	52	0.901	97	0.981	142	0.832	187	0.235	232	0.227	277	0.543	322	0.992
8	0.920	53	0.901	98	0.983	143	0.821	188	0.229	233	0.224	278	0.558	323	0.994
9	0.918	54	0.902	99	0.986	144	0.809	189	0.223	234	0.222	279	0.573	324	0.996
10	0.917	55	0.902	100	0.988	145	0.797	190	0.218	235	0.219	280	0.588	325	0.997
11	0.915	56	0.903	101	0.990	146	0.785	191	0.214	236	0.216	281	0.604	326	0.998
12	0.914	57	0.903	102	0.992	147	0.773	192	0.210	237	0.214	282	0.619	327	0.999
13	0.912	58	0.904	103	0.993	148	0.760	193	0.207	238	0.211	283	0.634	328	1.000
14	0.911	59	0.905	104	0.995	149	0.747	194	0.206	239	0.209	284	0.648	329	1.000
15	0.910	60	0.905	105	0.996	150	0.733	195	0.204	240	0.207	285	0.663	330	1.000
16	0.909	61	0.906	106	0.997	151	0.720	196	0.204	241	0.206	286	0.677	331	1.000
17	0.908	62	0.907	107	0.998	152	0.706	197	0.204	242	0.205	287	0.692	332	0.999
18	0.907	63	0.908	108	0.999	153	0.692	198	0.205	243	0.204	288	0.706	333	0.998
19	0.906	64	0.909	109	1.000	154	0.677	199	0.206	244	0.204	289	0.720	334	0.997
20	0.905	65	0.910	110	1.000	155	0.663	200	0.207	245	0.204	290	0.733	335	0.996
21	0.905	66	0.911	111	1.000	156	0.648	201	0.209	246	0.206	291	0.747	336	0.995
22	0.904	67	0.912	112	1.000	157	0.634	202	0.211	247	0.207	292	0.760	337	0.993
23	0.903	68	0.914	113	0.999	158	0.619	203	0.214	248	0.210	293	0.773	338	0.992
24	0.903	69	0.915	114	0.998	159	0.604	204	0.216	249	0.214	294	0.785	339	0.990
25	0.902	70	0.917	115	0.997	160	0.588	205	0.219	250	0.218	295	0.797	340	0.988
26	0.902	71	0.918	116	0.996	161	0.573	206	0.222	251	0.223	296	0.809	341	0.986
27	0.901	72	0.920	117	0.994	162	0.558	207	0.224	252	0.229	297	0.821	342	0.983
28	0.901	73	0.922	118	0.992	163	0.543	208	0.227	253	0.235	298	0.832	343	0.981
29	0.901	74	0.924	119	0.990	164	0.527	209	0.229	254	0.243	299	0.843	344	0.978
30	0.900	75	0.926	120	0.987	165	0.512	210	0.232	255	0.251	300	0.854	345	0.976
31	0.900	76	0.928	121	0.984	166	0.497	211	0.234	256	0.260	301	0.864	346	0.973
32	0.900	77	0.930	122	0.981	167	0.482	212	0.236	257	0.269	302	0.874	347	0.971
33	0.900	78	0.932	123	0.977	168	0.466	213	0.238	258	0.280	303	0.883	348	0.968
34	0.900	79	0.934	124	0.973	169	0.451	214	0.240	259	0.290	304	0.893	349	0.965
35	0.900	80	0.936	125	0.968	170	0.437	215	0.241	260	0.302	305	0.901	350	0.963
36	0.899	81	0.939	126	0.963	171	0.422	216	0.242	261	0.313	306	0.910	351	0.960
37	0.899	82	0.941	127	0.958	172	0.407	217	0.243	262	0.326	307	0.918	352	0.957
38	0.899	83	0.944	128	0.952	173	0.393	218	0.244	263	0.338	308	0.925	353	0.954
39	0.899	84	0.946	129	0.946	174	0.379	219	0.244	264	0.352	309	0.933	354	0.952
40	0.899	85	0.949	130	0.940	175	0.365	220	0.245	265	0.365	310	0.940	355	0.949
41	0.899	86	0.952	131	0.933	176	0.352	221	0.244	266	0.379	311	0.946	356	0.946
42	0.899	87	0.954	132	0.925	177	0.338	222	0.244	267	0.393	312	0.952	357	0.944
43	0.899	88	0.957	133	0.918	178	0.326	223	0.243	268	0.407	313	0.958	358	0.941
44	0.899	89	0.960	134	0.910	179	0.313	224	0.242	269	0.422	314	0.963	359	0.939

Dielectric

Date	19-Jun-98	Channel	17
Call Letters	KPHO-DT		
Location	Phoenix, AZ		
Customer			
Antenna Type	TFU-26DSC C170		

ELEVATION PATTERN

RMS Gain at Main Lobe	22.0 (13.42 dB)	Beam Tilt	1.00 deg
RMS Gain at Horizontal	11.9 (10.76 dB)	Frequency	491.00 MHz
Calculated / Measured	Calculated	Drawing #	26Q220100

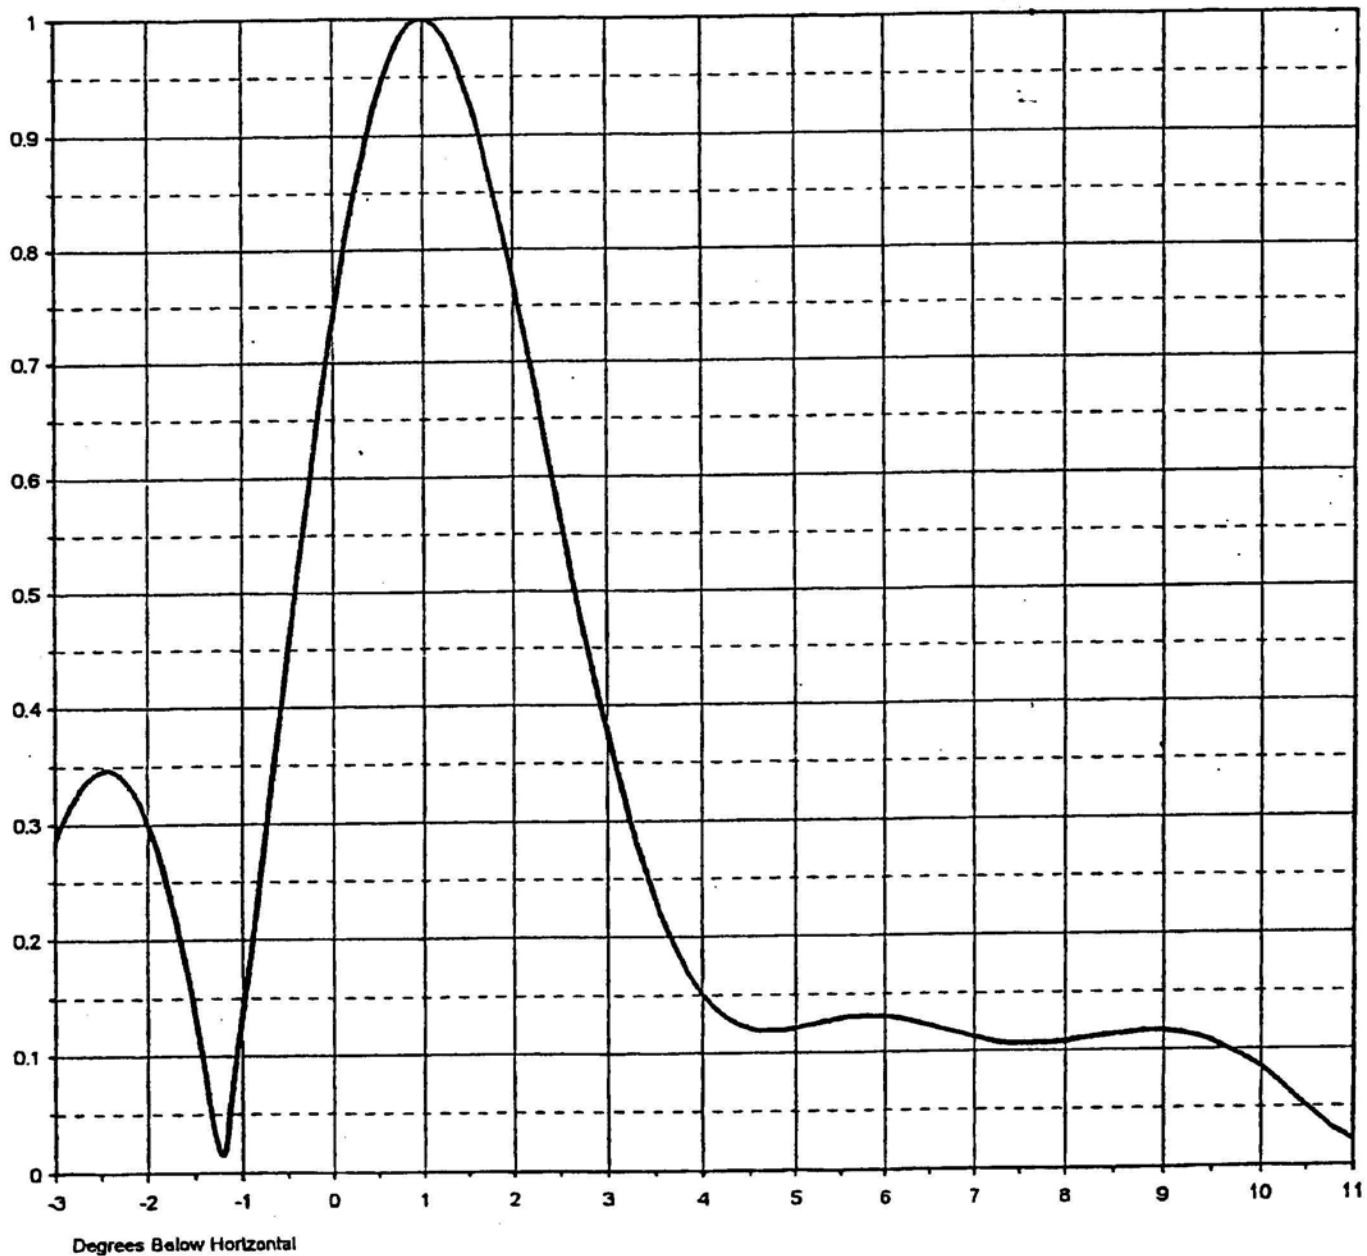

Dielectric

Date	19-Jun-98	
Call Letters	KPHO-DT	Channel 17
Location	Phoenix, AZ	
Customer		
Antenna Type	TFU-26DSC C170	

ELEVATION PATTERN

RMS Gain at Main Lobe	22.0 (13.42 dB)	Beam Tilt	1.00 deg
RMS Gain at Horizontal	11.9 (10.76 dB)	Frequency	491.00 MHz
Calculated / Measured	Calculated	Drawing #	26Q220100-90

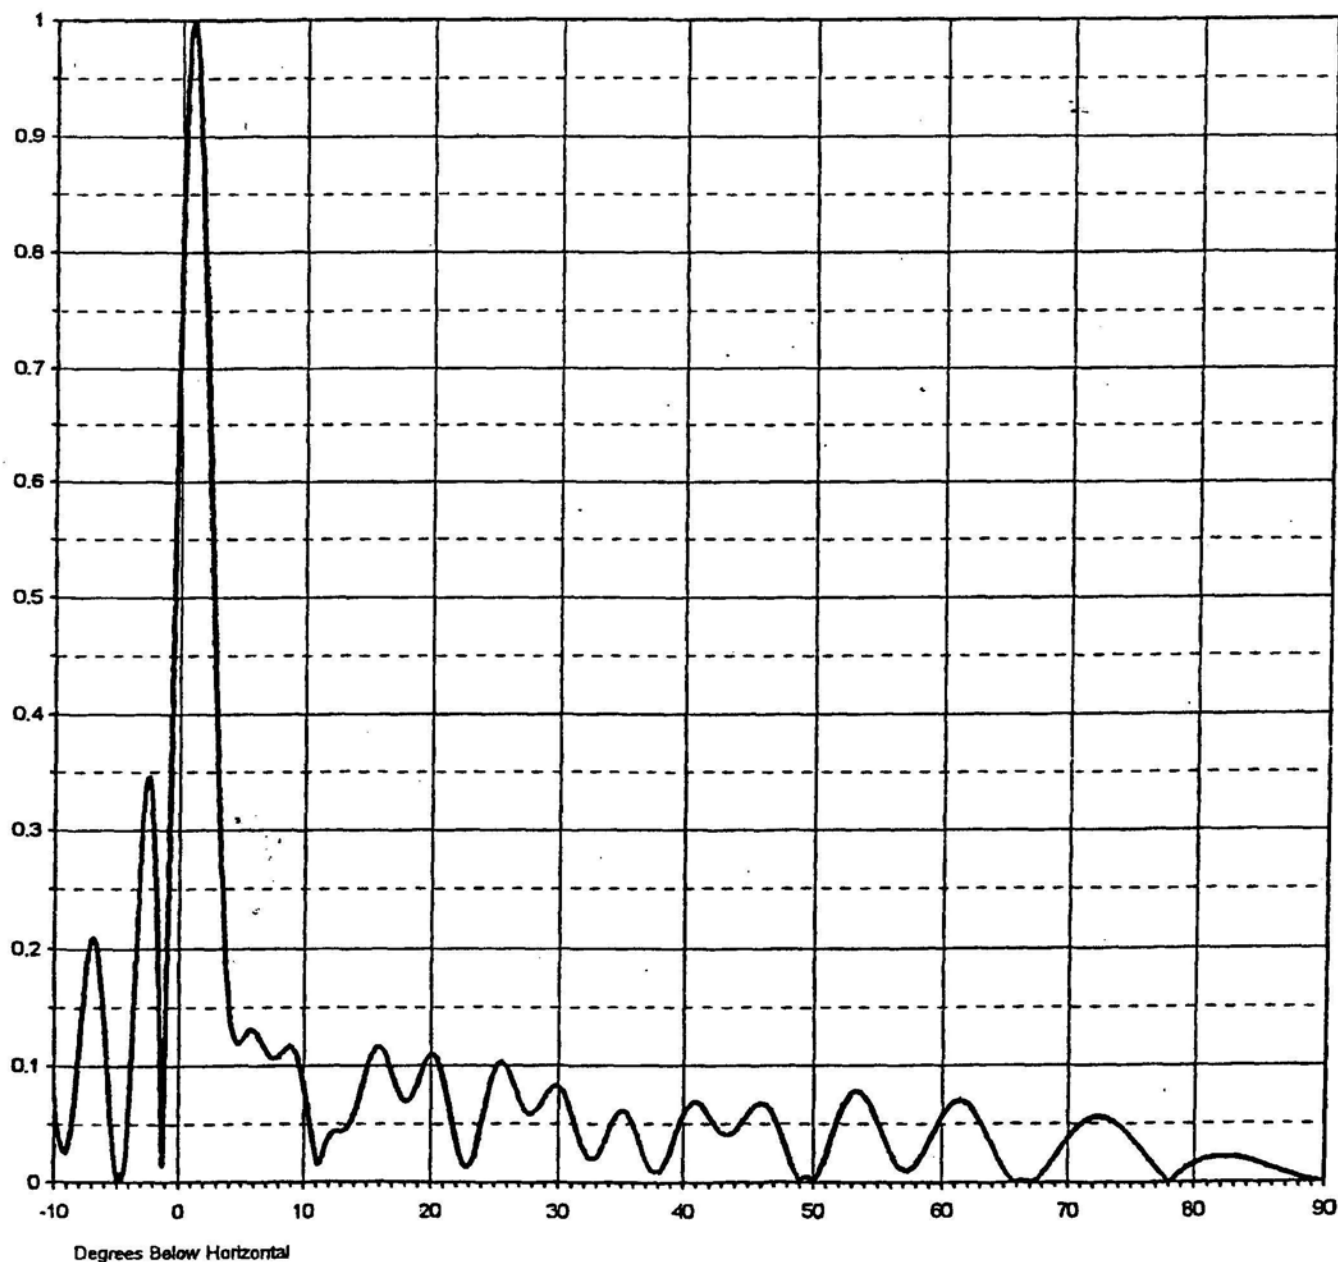


EXHIBIT 43

Dielectric

Date **19-Jun-98**
 Call Letters **KPHO-DT** Channel **17**
 Location **Phoenix, AZ**
 Customer
 Antenna Type **TFU-26DSC C170**

TABULATION OF ELEVATION PATTERN

Elevation Pattern Drawing #: **26Q220100-90**

Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field
-10.0	0.073	2.4	0.612	10.6	0.051	30.5	0.077	51.0	0.019	71.5	0.052
-9.5	0.034	2.6	0.530	10.8	0.038	31.0	0.063	51.5	0.036	72.0	0.055
-9.0	0.027	2.8	0.450	11.0	0.026	31.5	0.046	52.0	0.052	72.5	0.056
-8.5	0.059	3.0	0.378	11.5	0.020	32.0	0.030	52.5	0.066	73.0	0.055
-8.0	0.117	3.2	0.313	12.0	0.035	32.5	0.021	53.0	0.075	73.5	0.052
-7.5	0.176	3.4	0.257	12.5	0.042	33.0	0.020	53.5	0.078	74.0	0.049
-7.0	0.208	3.6	0.212	13.0	0.043	33.5	0.028	54.0	0.074	74.5	0.044
-6.5	0.193	3.8	0.177	13.5	0.045	34.0	0.041	54.5	0.066	75.0	0.038
-6.0	0.135	4.0	0.151	14.0	0.054	34.5	0.053	55.0	0.054	75.5	0.032
-5.5	0.059	4.2	0.134	14.5	0.071	35.0	0.060	55.5	0.040	76.0	0.026
-5.0	0.002	4.4	0.124	15.0	0.092	35.5	0.060	56.0	0.027	76.5	0.019
-4.5	0.003	4.6	0.119	15.5	0.109	36.0	0.051	56.5	0.017	77.0	0.013
-4.0	0.061	4.8	0.119	16.0	0.116	36.5	0.037	57.0	0.012	77.5	0.007
-3.5	0.172	5.0	0.121	16.5	0.111	37.0	0.022	57.5	0.010	78.0	0.001
-3.0	0.286	5.2	0.124	17.0	0.097	37.5	0.012	58.0	0.014	78.5	0.004
-2.8	0.319	5.4	0.127	17.5	0.080	38.0	0.009	58.5	0.022	79.0	0.008
-2.6	0.340	5.6	0.130	18.0	0.070	38.5	0.013	59.0	0.032	79.5	0.012
-2.4	0.346	5.8	0.131	18.5	0.071	39.0	0.024	59.5	0.043	80.0	0.015
-2.2	0.333	6.0	0.130	19.0	0.081	39.5	0.039	60.0	0.054	80.5	0.018
-2.0	0.301	6.2	0.128	19.5	0.096	40.0	0.054	60.5	0.062	81.0	0.020
-1.8	0.249	6.4	0.124	20.0	0.108	40.5	0.064	61.0	0.068	81.5	0.021
-1.6	0.178	6.6	0.120	20.5	0.108	41.0	0.068	61.5	0.070	82.0	0.021
-1.4	0.088	6.8	0.116	21.0	0.094	41.5	0.066	62.0	0.068	82.5	0.021
-1.2	0.016	7.0	0.112	21.5	0.069	42.0	0.059	62.5	0.062	83.0	0.021
-1.0	0.133	7.2	0.108	22.0	0.041	42.5	0.050	63.0	0.054	83.5	0.020
-0.8	0.257	7.4	0.106	22.5	0.020	43.0	0.043	63.5	0.044	84.0	0.019
-0.6	0.384	7.6	0.106	23.0	0.013	43.5	0.040	64.0	0.033	84.5	0.018
-0.4	0.509	7.8	0.106	23.5	0.022	44.0	0.042	64.5	0.020	85.0	0.016
-0.2	0.628	8.0	0.107	24.0	0.044	44.5	0.048	65.0	0.011	85.5	0.014
0.0	0.736	8.2	0.110	24.5	0.070	45.0	0.056	65.5	0.004	86.0	0.012
0.2	0.829	8.4	0.112	25.0	0.091	45.5	0.063	66.0	0.000	86.5	0.010
0.4	0.903	8.6	0.114	25.5	0.102	46.0	0.067	66.5	0.002	87.0	0.008
0.6	0.957	8.8	0.116	26.0	0.100	46.5	0.066	67.0	0.001	87.5	0.006
0.8	0.990	9.0	0.116	26.5	0.088	47.0	0.058	67.5	0.002	88.0	0.005
1.0	1.000	9.2	0.114	27.0	0.074	47.5	0.045	68.0	0.007	88.5	0.003
1.2	0.989	9.4	0.110	27.5	0.062	48.0	0.030	68.5	0.014	89.0	0.002
1.4	0.958	9.6	0.103	28.0	0.058	48.5	0.015	69.0	0.022	89.5	0.001
1.6	0.910	9.8	0.099	28.5	0.063	49.0	0.004	69.5	0.029	90.0	0.000
1.8	0.848	10.0	0.090	29.0	0.071	49.5	0.004	70.0	0.037		
2.0	0.775	10.2	0.078	29.5	0.080	50.0	0.003	70.5	0.043		
2.2	0.695	10.4	0.065	30.0	0.083	50.5	0.006	71.0	0.049		